

29125798	<b>DATA SHEET</b>
Valid from: 30.11.2018	<b>PCF CONNECTOR ST (BFOC) CLAMP (*D) /50PC</b>

## Description

- PCF optical fibre connector ST (BFOC)
- Suitable for polymer cladded fibres
- Easy manufacturing by clamping



## General characteristics

Connector, type (acc. IEC 61754-2)	ST (BFOC)
Suitable optical fibres (acc. IEC 60793-2-30)	A3c, A3d, A3e (polymer cladded fibre Ø200/230 µm)
Degree of protection	IP 20
Temperature range	-40 to +85 °C (-40 to +185 °F) (operation + storage)

## Variation

Article	Description	Suitable cable- Ø (*D)[mm]	Package size [pcs]
29125798	PCF Connector ST (BFOC) Clamp 2.2 /50PC	2.2	50
29125799	PCF Connector ST (BFOC) Clamp 2.2 /4PC	2.2	4
29126798	PCF Connector ST (BFOC) Clamp 3.0 /50PC	3.0	50
29126799	PCF Connector ST (BFOC) Clamp 3.0 /4PC	3.0	4


## Optical properties

Insertion loss (IL)	≤ 1.25 dB
---------------------	-----------

## Mechanical properties

Ferrule, material	Nickel silver
Lock nut, material	Nickel silver
Contact spring, material	Steel
Bayonet nut, material	PBT
Bend protection, material	TPE
Dust protection, material	HD-PE
Retention force of fibre cable (after cable clamping)	≥ 80 N

## Technical drawing

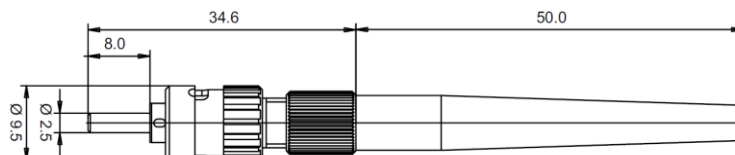

## Application range

Optical networks, industry electronics, power electronics, consumer electronics

## Note

Photographs are not true to scale and do not represent detailed images of the respective products.