



LED elements
steady light base
mount on LPZ
control station
LPXLPB

Product designation

Product type designation

General characteristics

Colour Yellow

Electrical characteristics

Rated frequency	Hz	50-60
Supply voltage (AC)	V	185...265

Operations

Electrical life	hours	100000
-----------------	-------	--------

Mechanical features

Conductor section

AWG/kcmil conductor section	max	14
	IEC	max mm ² 1 or 2 / 2.5

Mounting adapter	LPXAU120
------------------	----------

Weight	g	16
--------	---	----


Ambient conditions

Temperature


Operating temperature	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+85

Dimensions

Mounting position on the LPZ control station base

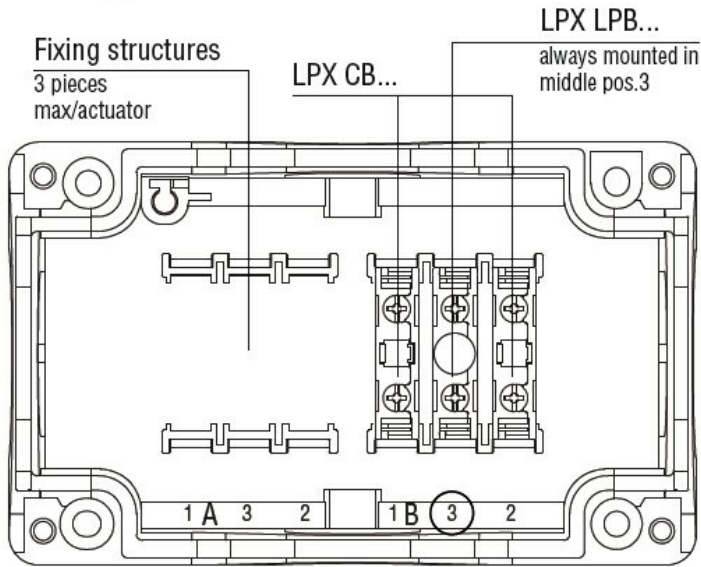

Wiring diagrams

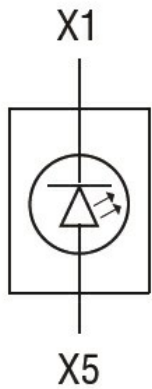

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN/BS 60947-1
IEC/EN/BS 60947-5-1
UL508

Certificates

CCC
cULus
EAC
RINA
UL

ETIM classification

ETIM 8.0

EC000204 -
Lamp holder
block for control
circuit devices