


PANDUIT PART #	WIRE SIZE mm ²	WIRE STRIP LENGTH	STUD HOLE	A ±3.0	B MIN.	ID ±0.25	OD ±0.25	G ±1.27	P MIN.	C REF.	T ±0.5	W ±0.76	PANDUIT DIE COLOR CODE PANDUIT DIE INDEX NUMBER
LAAM58-M8-L	58	41.8	M8	81.8	31.8	10.01	16.3	16.0	31.8	15.7	5.8	22.35	TAN DIE P50
LAAM60-M10-40	60	45.1	M10	82.6	35.1	11.15	17.4	16.0	31.8	15.7	5.8	23.88	OLIVE DIE P54
LAAM100-M10-30	100	48.1	M10	90.4	38.1	13.92	22.2	16.0	33.3	17.3	7.9	30.23	WHITE DIE P66
LAAM150-M12-X	150	67.2	M12	101.6	57.2	16.51	25.7	16.0	33.3	17.3	8.6	35.05	BLUE DIE P76
LAAM200-M12-X	200	73.5	M12	124.0	63.5	19.35	30.1	16.0	31.8	15.7	10.4	40.89	GREEN DIE P94
LAAM250-M16-6	250	86.2	M16	139.7	76.2	21.34	33.5	16.0	38.1	22.1	11.4	44.20	PINK DIE P99
LAAM325-M16-5	325	86.2	M16	137.9	76.2	23.37	36.6	16.0	38.1	22.1	12.7	43.94	BLACK DIE P106
LAAM400-M16-5	400	95.9	M16	165.1	85.9	26.19	40.5	22.4	47.8	25.4	13.7	44.20	RED DIE P125



NOTES:

1. MATERIAL: SEAMLESS ALUMINUM TUBING, TIN PLATED
2. BARREL COLOR CODED WITH DIE SET INDEX NUMBER
3. FOR COMPACTED METRIC STRANDED ALUMINUM WIRE
4. cULus LISTED TEMPERATURE RATED 90° C (AL9) (EXCEPT LAAM58-M8-L)
5. cULus LISTED VOLTAGE RATING 35 KV (EXCEPT LAAM58-M8-L)
6. ALL DIMENSIONS ARE IN MILLIMETERS
7. ALL PARTS MEET JIS C 2801 REQUIREMENTS

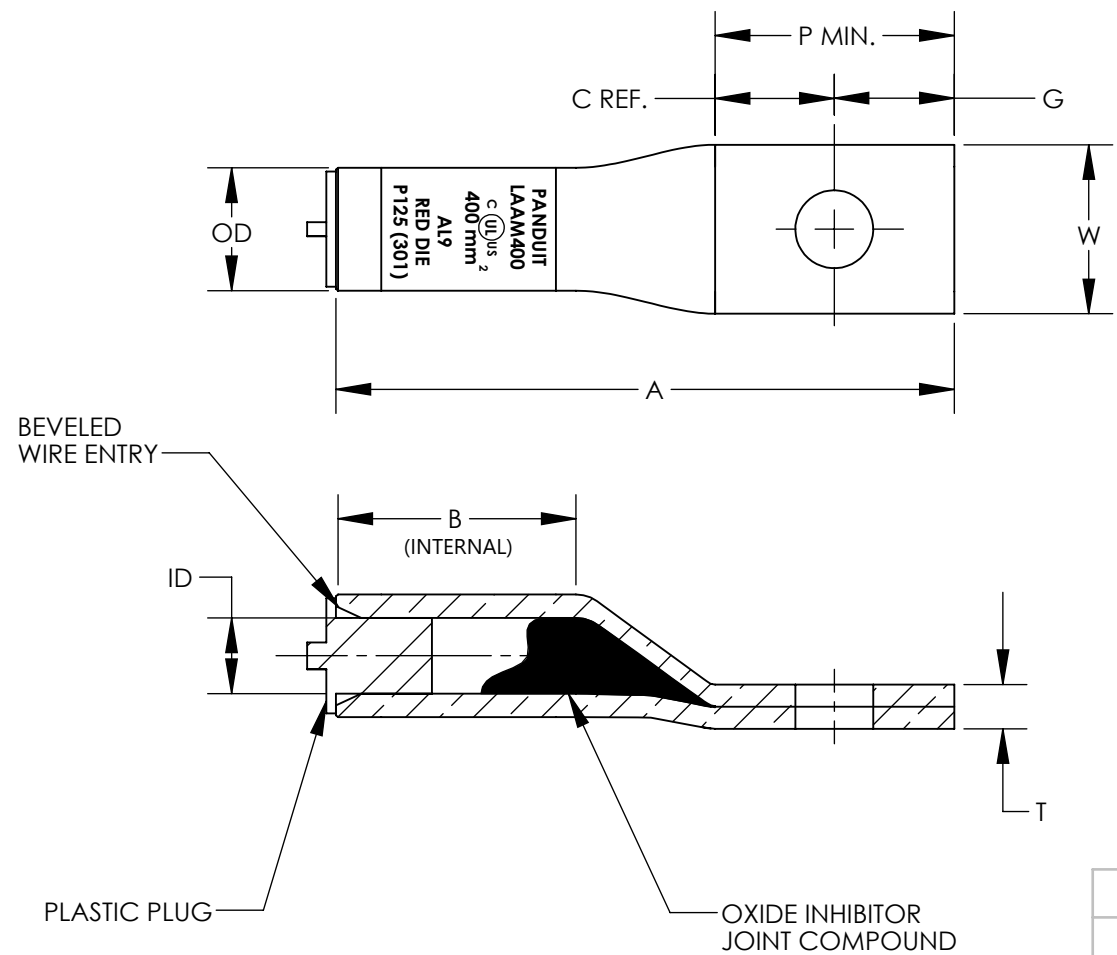

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01	1/5/22	RUMO	JHNU	JADE	REVISED STRIP LENGTHS; ADDED NOTE 7	01090EBC
00	10/21/21	RUMO	JHNU	JADE	INITIAL RELEASE	01090EBC

TITLE LAAM SERIES METRIC ALUMINUM TUBULAR LUGS CUSTOMER DRAWING			
ITEM REVISION NAME 01090EBC_DC_01		PANDUIT	
DATASET FILE NAME 01090EBC_DC_01.SLDDRW			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± ANGLES ±			
DRAWN BY RUMO		DATE 10/21/21	CHK JHNU
SCALE N/A		THIRD ANGLE PROJECTION	
SHEET 1 OF 1		DRAWING NUMBER 01090EBA_DC	
SIZE B			