










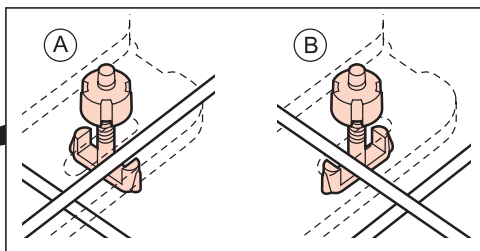
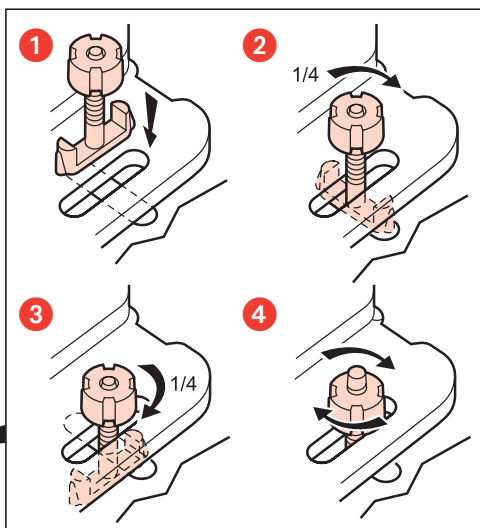
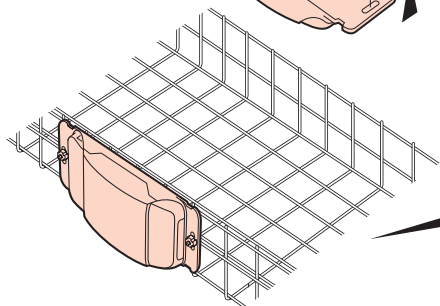
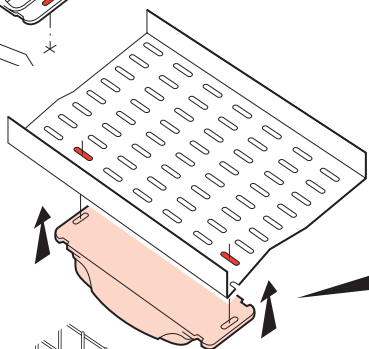

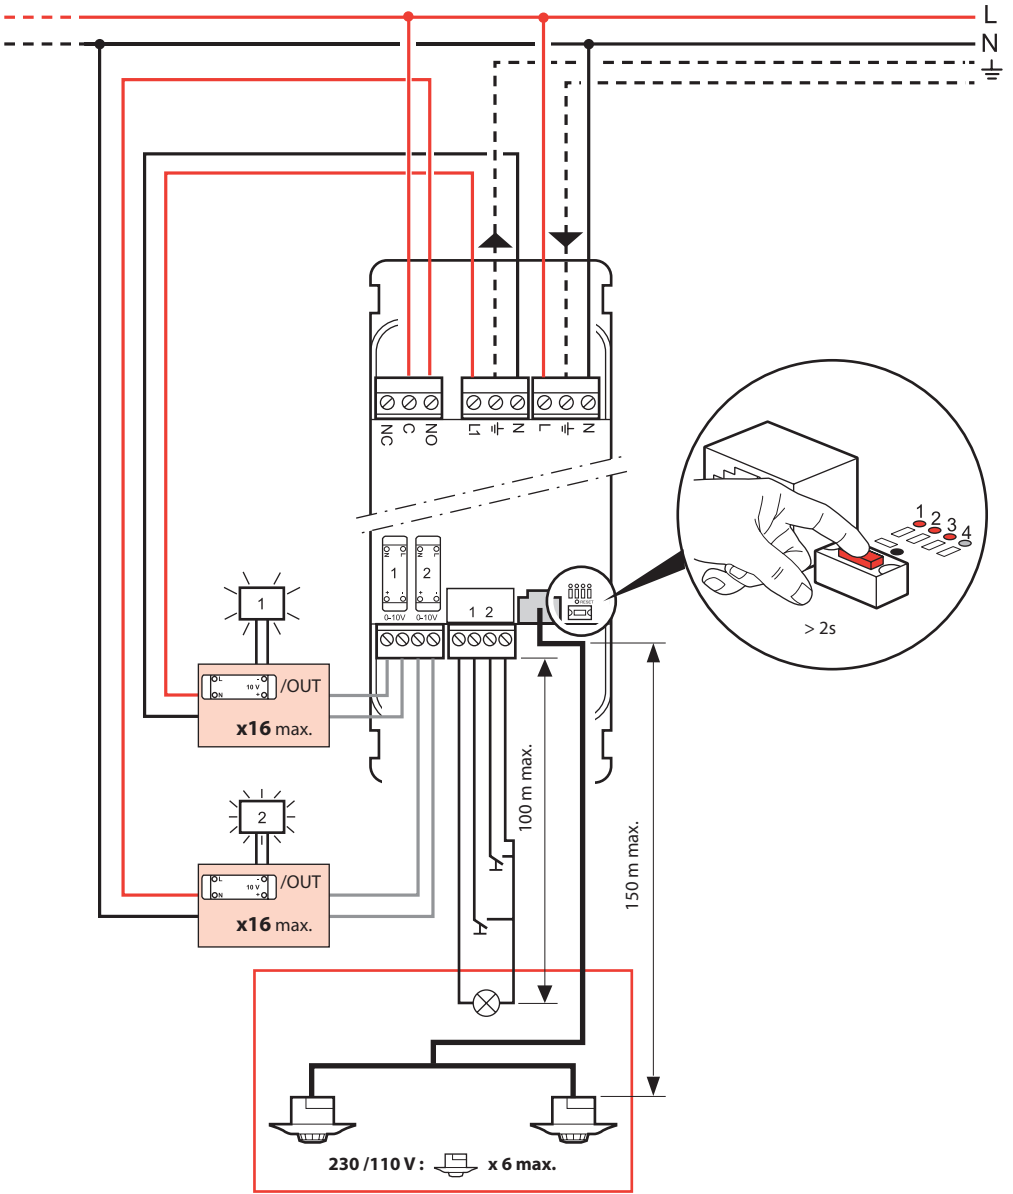
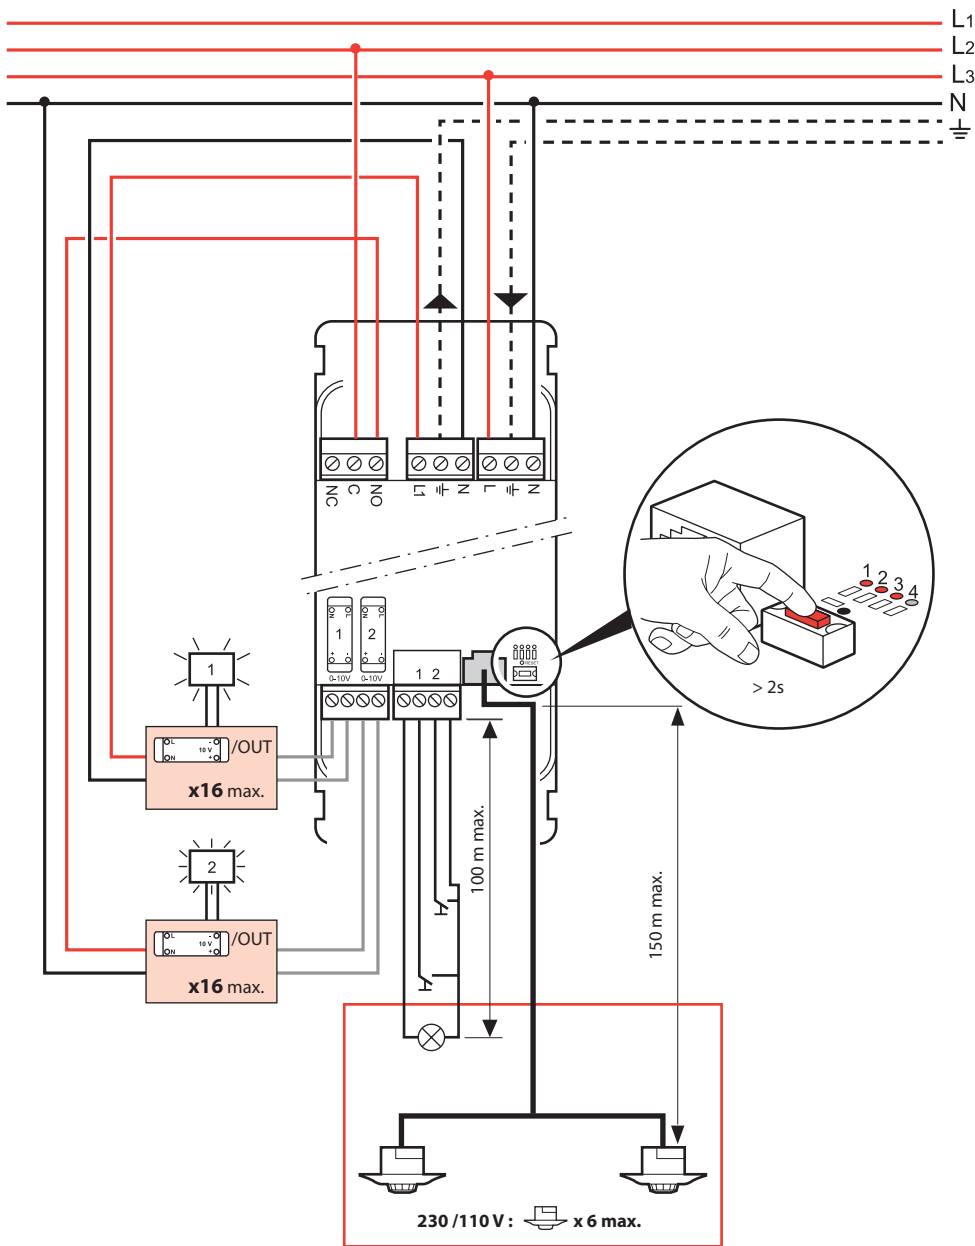
	100 - 240 V
	50 - 60 Hz
	2 x 2,5 mm ²
 0-10 V	≤ 1,5 mm ²
	RJ 45
	CEI 60669-2-1

 +45°C -5°C						
						
230 V~	1000 VA	4,3 A	1000 VA	4,3 A	1000 VA	4,3 A
110 V~	500 VA		500 VA		500 VA	












LED

BP DA1

BP DA2



Mode 1 = 2 = 1 + 30%
 Mode 2 = 2 = 1 + 50%
 Mode 3 = 2 = 1 + 80%




ON/OFF





ON/OFF

> 2s




Mode 4 = 1 = 2




ON/OFF

> 2s



Mode 5 = 2 = 2/3 1




ON/OFF




ON/OFF

> 2s


Mode 1 2 3



Mode 4

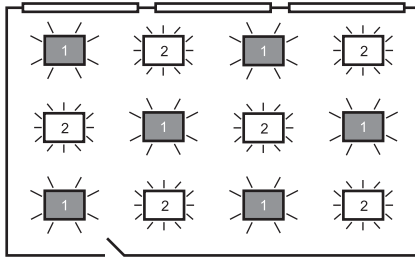


Mode 5




RESET

1



< 2s

2



> 10s

