


Electronic Superimposed Ignitors for HS Lamps up to 70 W


Standard version or with automatic switch-off
 For high pressure sodium lamps (HS) and ceramic discharge lamps C-HI-TT/ET with base E27
 Phasing of the ignition voltage:
 60–90 °el and 240–270 °el
 Max. permitted casing temperature: 105 °C
 Fastening: male nipple with pre-assembled washer and nut
 For luminaires of protection class I and II




Al casing

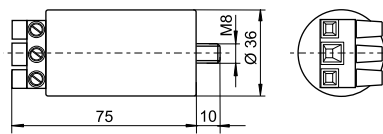


PC casing – K

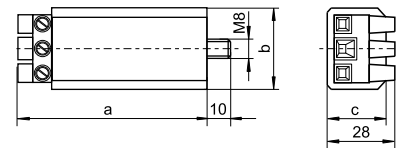

PC casing – K D20

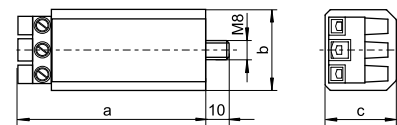

PC casing – with push-in terminals

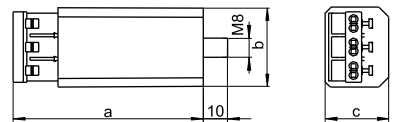

Type	Ref. No.	Voltage AC 50–60 Hz V	Max. lamp A	Internal loss W	Inherent heating K	Ignition voltage kV	Load capacity pF	Switch-off time sec./Hz	Casing d (∅)	a	b	c	Weight
									mm	mm	mm	mm	g
Aluminium casing (Al) with screw terminals: 0.75–4 mm²													
Z 70 S	140413	220–240	2	< 0.6	< 5	1.8–2.3	20–200	—	35	76	—	—	135
Plastic casing (PC) with screw terminals: 0.75–4 mm²													
Z 70 K	140481	220–240	2	< 0.6	< 5	1.8–2.3	20–200	—	—	78	34	27	125
Z 70 K D20	141580*	220–240	2	< 0.6	< 5	1.8–2.3	20–100	1216/50–60	—	80	34	30	145
Plastic casing (PC) with push-in terminals: 0.5–2.5 mm²													
Z 70 K D20	142330*	220–240	2	< 0.6	< 5	1.8–2.3	20–100	1216/50–60	—	83	34	30	145

* With IPP technology