



Signal tower Ø70mm/2.75" 8TL7GL - Light mudules

Product designation


Product type designation


General characteristics	
Diameter	mm - inch 70 / 2.75
Supply voltage (AC)	V 110120
Colour	Red
IEC degree of protection	IP65
Mechanical features	
Weight	g 83
Ambient conditions	
Tomporatura	

Temperature

Operating temperature


	min	°C	-20	
	max	°C	+50	
Dimensions				







\_\_\_\_\_

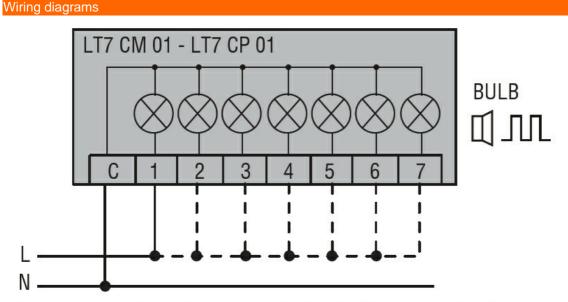

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance				
Compliance				
	CSA C22.2 n° 14			
	IEC/EN 60947-1			
	IEC/EN 60947-5-1			
	UL508			
Certificates				
	cULus			
	EAC			
ETIM classification	n			
		EC000232 -		
ETIM 8.0		Optical module		

8LT7GLE4

for signal tower