

## Miniature Fuses


Very HRC Fuses 6x32  
FA Very Fast Acting  
690V from 0.1 to 10A



Complying with UL recognized E76491



### Dimensions

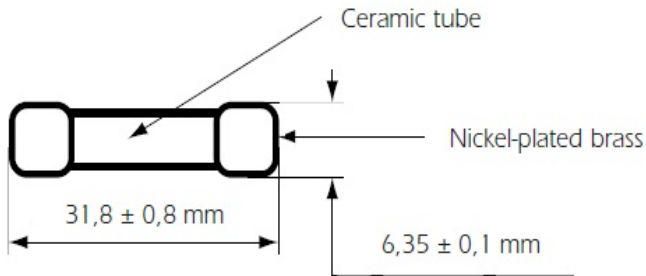

Product weight: 2.5g max.  
Packaging: Blister per 50 pieces.  
For a 500 pieces box packaging  
consult us.

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity @ Nominal current (A)	Pre-arcing I <sup>2</sup> t @ Rated voltage (A <sup>2</sup> s)	Clearing I <sup>2</sup> t @ Rated Voltage (A <sup>2</sup> s)	Max. voltage drop (V)
6.3x32	MI6FA69V0.1	Q093279	690	0.1	Cos $\mu \geq 0.2^*$	0.00057	0.0037	2.75
6.3x32	MI6FA69V0.125	S093281	690	0.125	Cos $\mu \geq 0.2^*$	0.00077	0.005	2.6
6.3x32	MI6FA69V0.160	V086452	690	0.16	Cos $\mu \geq 0.2^*$	0.002	0.014	2
6.3x32	MI6FA69V0.200	T086474	690	0.2	Cos $\mu \geq 0.2^*$	0.0046	0.03	1.7
6.3x32	MI6FA69V0.250	V093283	690	0.25	Cos $\mu \geq 0.2^*$	0.009	0.06	1.55
6.3x32	MI6FA69V0.315	X093285	690	0.315	Cos $\mu \geq 0.2^*$	0.016	0.1	1.45
6.3x32	MI6FA69V0.400	W086476	690	0.4	Cos $\mu \geq 0.2^*$	0.03	0.2	1.4
6.3x32	MI6FA69V0.500	D086483	690	0.5	Cos $\mu \geq 0.2^*$	0.05	0.33	1.4
6.3x32	MI6FA69V0.630	Z093287	690	0.63	Cos $\mu \geq 0.2^*$	0.12	0.8	1.15
6.3x32	MI6FA69V0.800	D086437	690	0.8	Cos $\mu \geq 0.2^*$	0.18	1.2	1.15
6.3x32	MI6FA69V1	H093295	690	1	Cos $\mu \geq 0.2^*$	0.11	0.48	0.71
6.3x32	MI6FA69V1.25	B093289	690	1.25	Cos $\mu \geq 0.2^*$	0.17	0.76	0.7
6.3x32	MI6FA69V1.6	D093291	690	1.6	Cos $\mu \geq 0.2^*$	0.39	1.7	0.65
6.3x32	MI6FA69V2	F093293	690	2	Cos $\mu \geq 0.2^*$	0.81	3.5	0.55
6.3x32	MI6FA60V10	V205592	600	10	Cos $\mu = 0.2^{**}$	3.1	69	0.2

\*30kA 690VAC Cos  $\mu \geq 0.2$

\*\*50kA 600VAC Cos  $\mu = 0.2$



Ratings lower than 0.1A : please enquire

## Miniature Fuses

Very HRC Fuses 6x32  
 FA Very Fast Acting  
 690V from 0.1 to 10A



### Time Current Curves

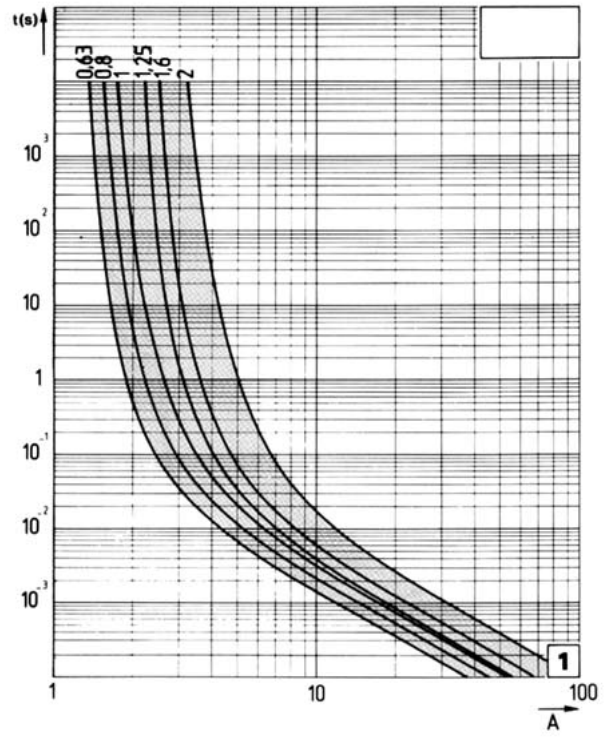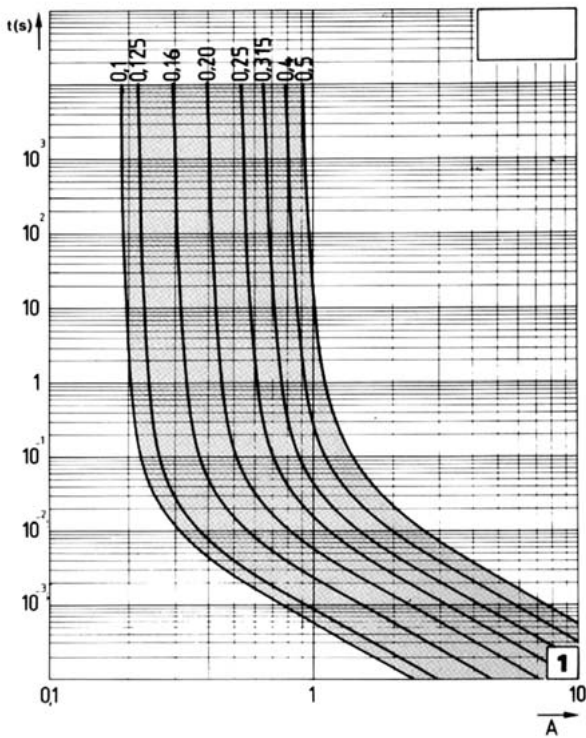

I margin  $\pm 12\%$ . Actual prearcing time(s). R.M.S. Value of prearcing current (A).