




Product designation Product type designation		Selector switch actuator key - 3 position LPCS33
General characteristics		
Colour		Black
Type of positions		Selector switch
Material		Polyamide
IEC degree of protection		IP66, IP67 and IP69K
Mechanical features		
Mechanical life	cycles	1000000
Mounting adapter		LPXAU120
Weight	g	60
UL technical data		
UL degree of protection		Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions		
Temperature		
Operating temperature		

Operating temperature				
	min	°C	-25	
	max	°C	+70	
Storage temperature				
	min	°C	-40	
	max	°C	+85	

Dimensions

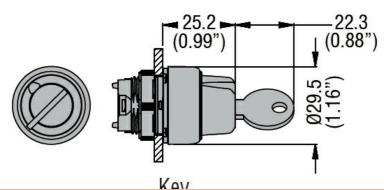

## Certifications and compliance

Compliance	
	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508
Certificates	
	CCC
	cULus

electric SELE

ENERGY AND AUTOMATION

OV

ETIM classification

ETIM 8.0

SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 - 0 - 2 WITH DIFFERENT KEY CODE

> EC000222 -Front element for selector switch

LPCS330R421E