

# **CLICK 21 range**

---

## Watertight luminaires in polycarbonate

New watertight luminaires in polycarbonate, equipped with transparent shield with scored finish.

- IP65 degree of protection.
- Electronic versions for single and double fluorescente lamps T8 and T5.
- Class 1.




# CLICK 21 RANGE

WATERTIGHT LUMINAIRES IN POLYCARBONATE




## CLICK 21

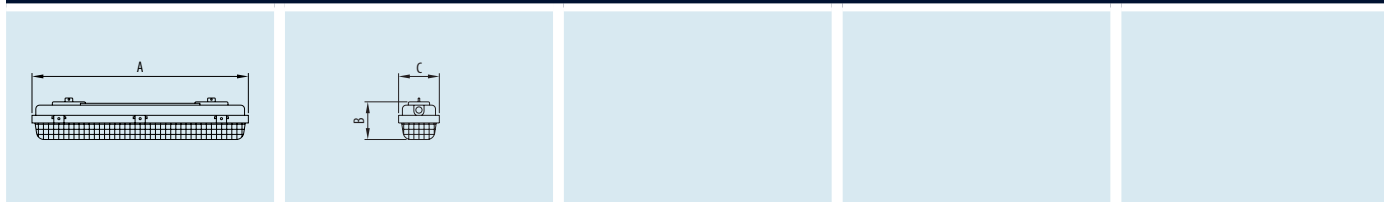

### DIFFUSER REFLECTOR



#### WIRED VERSIONS WITH P.F. CORRECTION - IP65 - CLASS I - ELECTRONIC POWER SUPPLY



Code	No. of lamps	Lamp power	Lamp	Lamp holder	Dimensions AxBxC (mm)	Weight (kg)	Pack Carton
<b>VOLTAGE: 220 / 240 V - 50 / 60 Hz</b>							
GW 80 782	1	36 W	FD	G13	1290 x 112 x 135		1/112
GW 80 783	1	58 W	FD	G13	1590 x 112 x 135		1/112
GW 80 785	2	36 W	FD	G13	1290 x 112 x 135		1/112
GW 80 786	2	58 W	FD	G13	1590 x 112 x 135		1/112



#### UNWIRED VERSIONS



Code	No. of lamps	Lamp power	Lamp	Lamp holder	Dimensions AxBxC (mm)	Weight (kg)	Pack Carton
<b>VOLTAGE: 220 / 240 V - 50 / 60 Hz</b>							
GW 80 882	1	36 W	FD	G13	1290 x 112 x 135		1/112
GW 80 883	1	58 W	FD	G13	1590 x 112 x 135		1/112
GW 80 885	2	36 W	FD	G13	1290 x 112 x 135		1/112
GW 80 886	2	58 W	FD	G13	1590 x 112 x 135		1/112



#### WIRED VERSIONS WITH P.F. CORRECTION - IP65 - CLASS I - ELECTRONIC POWER SUPPLY



Code	No. of lamps	Lamp power	Lamp	Lamp holder	Dimensions AxBxC (mm)	Weight (kg)	Pack Carton
<b>VOLTAGE: 220 / 240 V - 50 / 60 Hz</b>							
GW 80 791	1	28 W	FD	G5	1290 x 112 x 135		1/112
GW 80 792	1	49 W	FD	G5	1590 x 112 x 135		1/112
GW 80 796	2	28 W	FD	G5	1290 x 112 x 135		1/112
GW 80 797	2	49 W	FD	G5	1590 x 112 x 135		1/112



#### UNWIRED VERSIONS



Code	No. of lamps	Lamp power	Lamp	Lamp holder	Dimensions AxBxC (mm)	Weight (kg)	Pack Carton
<b>VOLTAGE: 220 / 240 V - 50 / 60 Hz</b>							
GW 80 891	1	28 W	FD	G5	1290 x 112 x 135		1/112
GW 80 892	1	49 W	FD	G5	1590 x 112 x 135		1/112
GW 80 896	2	28 W	FD	G5	1290 x 112 x 135		1/112
GW 80 897	2	49 W	FD	G5	1590 x 112 x 135		1/112