
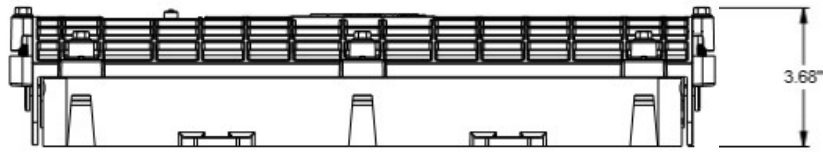



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
OFC11810BR	7.5 LB (3.40 kg)

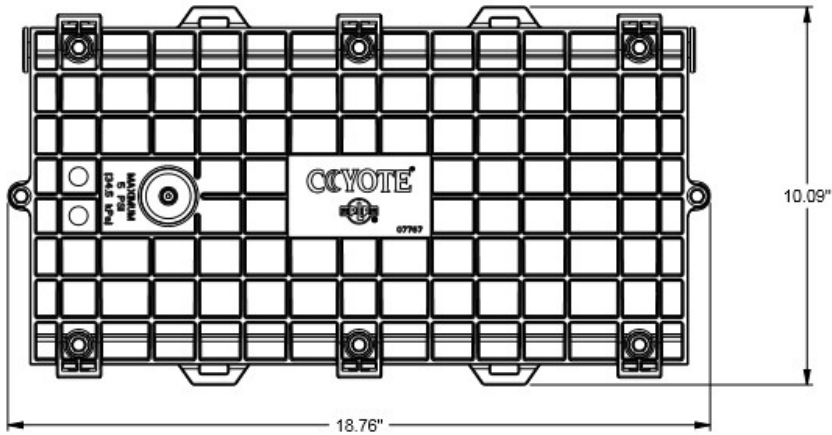

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- PART FEATURES:
 - Max. Splice Capacity: 96 Single Fiber or 288 Ribbon Fiber Fusion Splices
 - Application: Direct buried or below grade.
 - In-Line or Butt/Expressed Splice Configurations
 - Factory installed gasket allows re-entry and re-use
 - Grommet Kit included with (3) grommets
 - (2) 1-Hole 0.40"-0.60" Grommet
 - (1) 2-Hole 0.42"-0.60" Grommet
 - (1) 4-Hole 0.30"-0.43" Grommet
 - Flexible grommet sealing technology supports a wide range and quantity of flat or round cable profiles
 - Tested in accordance to GR-771-CORE by an independent outside lab
 - Integrated air valve to confirm seal integrity
 - Quick to assemble, no special tools required
 - Flat shape allows for mounting in small areas
 - Supports single fusion, mass fusion, mechanical, PLC splitters or a combination of all within one closure
- Splice tray sold separately.



TITLE													
OUTDOOR IN-LINE CLOSURE													
CUSTOMER DRAWING													
ITEM REVISION NAME					00271CCA/00								
DATASET FILE NAME					00271CCA_DC/00A								
					THIRD ANGLE PROJECTION								
MATERIAL					N/A								
					DRAWING NUMBER								
					00271CCA-DC								
00A	11/12/19	JBO	TMSE	ASY	INITIAL RELEASE	00271CCA	DRAWN BY	DATE	CHK	SCALE	DRAWING NUMBER		SIZE
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	JBO	11/12/19	TMSE	NONE	SHEET 1 OF 1		A

A-SIZE CUSTOMER

2

1

2

1