

## LED INTEGRATED LAMP-HOLDER, FLASHING LIGHT PLATINUM SERIES, SCREW TERMINATION, 185...265VAC. YELLOW



Product designation				LED elements steady light
Product type designation				LPXLF
General characteristics	3			
Colour				Yellow
Electrical characteristic	os en la companya de			
Supply voltage (AC)			V	185265
Operations				
Electrical life			hours	100000
Mechanical features				
Tightening torque for terminals max			Nm	1
Conductor section				
	AWG/kcmil conductor section			
		max		12
	IEC			<u> </u>
		max	mm²	1 or 2 / 2.5
Mounting adapter				LPXAU120
Weight			g	16
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85

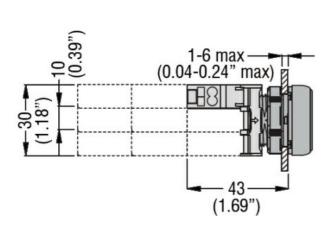


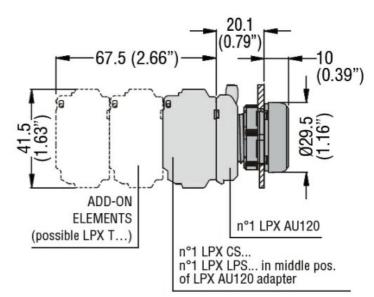

Dimensions



## LED INTEGRATED LAMP-HOLDER, FLASHING LIGHT PLATINUM SERIES, SCREW TERMINATION, 185...265VAC. YELLOW



## Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

**UL508** 

Certificates

CCC

cULus

EAC

RINA

UL

ETIM classification

ETIM 8.0

EC000204 -Lamp holder block for control circuit devices