

Parallel Connected Capacitors with Leads 250 V, 50/60 Hz

Capacitors type A


Casing: plastics, white

Fastening: male nipple M8x10

with nut and washer included

Discharge resistance

Leads: H05V2U 0,5 mm², length: 250 mm

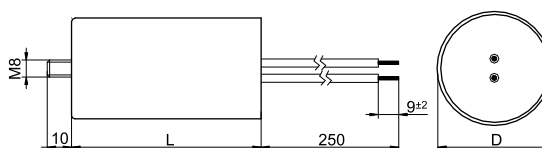

Ref. No.	Capacity µF (±10%)	Temperature range °C	Ø (D) mm	Length (L) mm	Male nipple/ length (mm)	Weight g	Packaging unit pcs.
571653	2.5	-25 to 85	30	55	M8x10	26	350
526169	4.0	-25 to 85	30	55	M8x10	27	350
571654	4.5	-25 to 85	30	55	M8x10	27	350
526170	6.0	-25 to 85	30	55	M8x10	28	350
526171	8.0	-25 to 85	30	55	M8x10	35	350
571655	9.0	-25 to 85	33	63	M8x10	40	250
529665	10.0	-25 to 85	33	63	M8x10	42	250
526172	12.0	-25 to 85	33	63	M8x10	45	250
543402	13.5	-25 to 85	33	63	M8x10	47	250
529666	16.0	-25 to 85	40	63	M8x10	61	200
551644	18.0	-25 to 85	40	63	M8x10	65	200
528552	20.0	-25 to 85	40	63	M8x10	69	200
508484	25.0	-25 to 85	40	63	M8x10	71	200
536743	30.0	-25 to 85	45	88	M8x10	95	120
528554	35.0	-25 to 85	45	88	M8x10	105	120
571656	40.0	-25 to 85	45	88	M8x10	113	120
528555	45.0	-25 to 85	45	88	M8x10	123	120
571657	50.0	-25 to 85	45	88	M8x10	127	120
571658	55.0	-25 to 85	50	94	M8x10	147	100
571659	60.0	-25 to 85	50	94	M8x10	157	80
571660	65.0	-25 to 85	50	94	M8x10	167	80