


## Photo

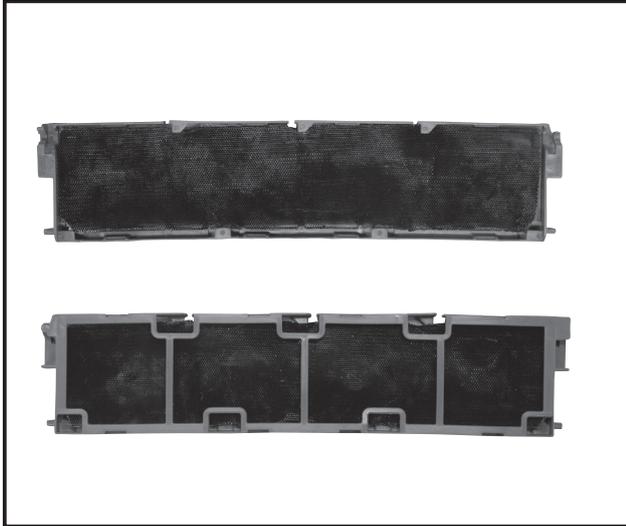

## Descriptions

The catalyst coating on the honeycomb-structured frame captures small foul-smelling substances in the air, then breaks down the source of the odors with the power of the ozone generated in a plasma electrode unit.

## Applicable Models


- |                |                |
|----------------|----------------|
| ■ MSZ-RW25VG   | ■ MSZ-LN35VG2V |
| ■ MSZ-RW35VG   | ■ MSZ-LN35VG2B |
| ■ MSZ-RW50VG   | ■ MSZ-LN35VG2R |
| ■ MSZ-LN18VG2W | ■ MSZ-LN50VG2W |
| ■ MSZ-LN18VG2V | ■ MSZ-LN50VG2V |
| ■ MSZ-LN18VG2B | ■ MSZ-LN50VG2B |
| ■ MSZ-LN18VG2R | ■ MSZ-LN50VG2R |
| ■ MSZ-LN25VG2W | ■ MSZ-LN60VG2W |
| ■ MSZ-LN25VG2V | ■ MSZ-LN60VG2V |
| ■ MSZ-LN25VG2B | ■ MSZ-LN60VG2B |
| ■ MSZ-LN25VG2R | ■ MSZ-LN60VG2R |
| ■ MSZ-LN35VG2W |                |

## Specifications

Material	Filter: Aluminium Catalyst: MnO <sub>2</sub> , SiO <sub>2</sub> Frame: Polypropylen
Color (Filter)	Black


## Dimensions

Unit : mm

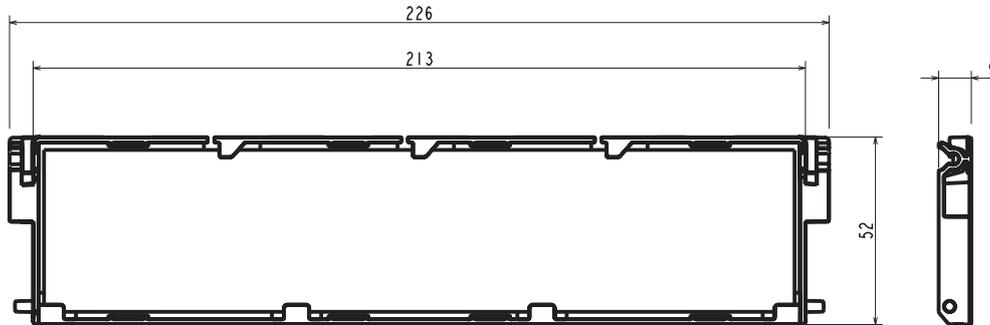

## How to Use / How to Install

### Replacement of the air cleaning filter

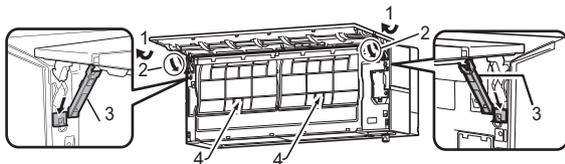


1. Open the front panel.  
Note: You cannot remove the front panel.
2. Rotate the stoppers as indicated by the arrows until they click.
3. Lower the front panel slowly and it will be held open with the stoppers.
4. Pinch the tabs on the filters; slightly push them up and pull down toward you to remove the air cleaning filters.
5. Install the new air cleaning filters.
6. Close the front panel securely and press the positions indicated by the arrows.

#### Every 3 months:

- Remove dirt by a vacuum cleaner, or soak the framed filter in lukewarm water (30 to 40°C) for about 15 minutes. Rinse well.
- After washing, dry it well in shade.
- Deodorizing feature recovers by cleaning the filter.

#### When dirt or smell cannot be removed by cleaning:

- Replace it with a new air cleaning filter.

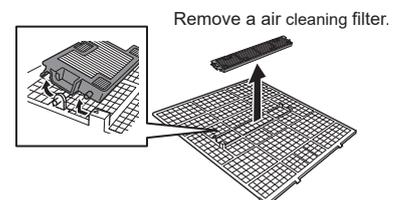

OPTIONAL PARTS

INDOOR UNIT