


PRE-INSTALLED SWITCH WIRING

PULS 91.2W
24 VOLT DC
POWER SUPPLIES

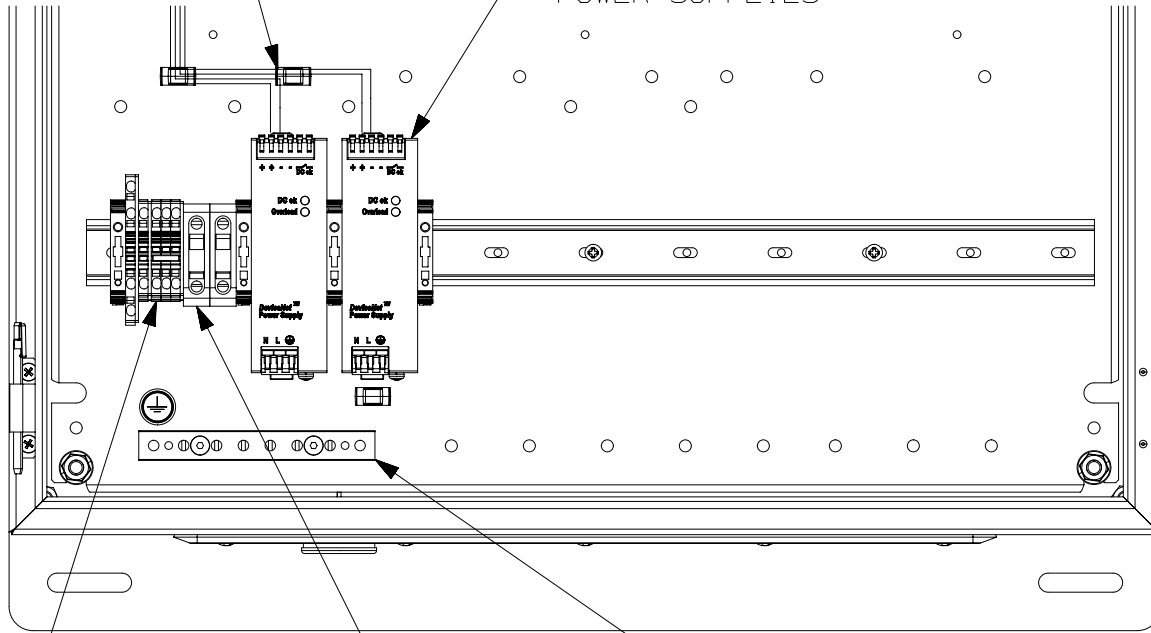

TERMINAL BLOCKS FOR INCOMING POWER (100-250 VAC 50-60HZ)

STAHL 10A CONTACT BLOCKS

6-PORT GROUND BAR

NOTES:

1. SYSTEM INCLUDES:
 - (2) PULS 91.2W 24 VOLT DC POWER SUPPLIES
 - (2) STAHL 10 AMP LOCKOUT CONTACT BLOCKS
 - (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER
 - (1) PANDUIT 6-PORT GROUND BAR
2. POWER CIRCUIT DESIGNED FOR ONE OR TWO 24 VOLT DC SWITCHES NOT TO EXCEED 42 WATTS PER SWITCH
3. ALL ACTIVE COMPONENTS RATED FOR USE CLASS 1, DIVISION 2 ENVIRONMENTS
4. ALL ZONE SYSTEMS COMPLY WITH UL 508A STANDARDS
5. ALL ZONE SYSTEMS REQUIRE A 100-240 VOLT AC SINGLE-PHASE FEED
6. INTERNAL WIRING NOT SHOWN, SEE DRAWING (15V510WB) FOR COMPLETE SCHEMATIC

| | | | | | | | | | |
|-----|---------|-----|-----|------|----------------------|--|--|--|----------|
| | | | | | | | | | |
| 01A | 2/21/18 | JBO | NWW | TIMH | RELEASED TO CUSTOMER | | | | 15V510CK |
| REV | DATE | BY | CHK | APR | DESCRIPTION | | | | ECN |

| | | | | | | | |
|---|-----------|---------------------|----------|---|--|------|--|
| TITLE | | | | UNIVERSAL NETWORK ZONE SYSTEM, 100-240VAC INPUT, REDUNDANT 91.2W 24VDC POWER SUPPLIES CUSTOMER DRAWING | | | |
| ITEM REVISION NAME | | | | 15V510CK/01 | | | |
| DATASET FILE NAME | | | | 15V510CK_DC/01A | | | |
| UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: | | | | MATERIAL: | | | |
| INCHES | | METRIC - MILLIMETER | | ANGLE | | N/A | |
| X.X | +/- 0.03 | X. | +/- 0.8 | | | | |
| X.XX | +/- 0.018 | X.X | +/- 0.46 | | | | |
| X.XXX | +/- 0.007 | X.XX | +/- 0.18 | | | | |
| DRAWING NUMBER: | | | | 15V510CK | | | |
| DRAWN BY | | | | THIRD ANGLE PROJECTION | | | |
| DATE | | CHK | | SCALE | | SIZE | |
| 2/25/16 | | TIMH | | 1:4 | | A | |
| SHT 1 OF 1 | | | | | | | |

001V0003DA/00