


Bouchon ventilateur Exe
Ventil plug Exe

Marquage / Marking :	Ex II 2GD Ex e IIC Gb Ex tb IIIC Db Ex 2GD Ex e IIC Gb Ex tb IIIC Db
Utilisation / Suitable for use in :	Equipement en atmosphères explosibles gaz et poussières ZONE1, ZONE2, ZONE21, ZONE22 Gas & Dust potentially explosive atmospheres ZONE1, ZONE2, ZONE21, ZONE22
Filetage / thread :	Métrique ISO / Metric ISO
Certificat / certificate :	IBEXU 10 ATEX 1169U
Matière / Material :	acier inoxydable 316L / Stainless Steel 316L
Joint / Sealing ring :	chloroprène
Indice de protection / IP protection	IP66
Température d'utilisation / Temperature range :	- 40°C / + 100° C

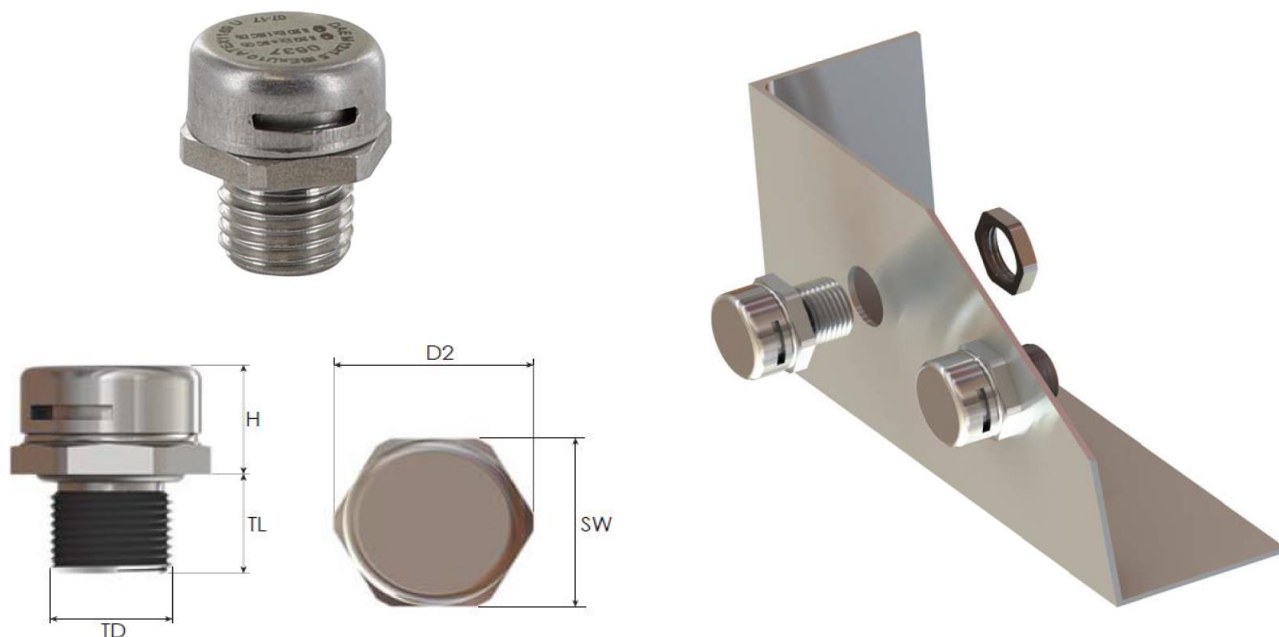

Filetage	Réf BLM	Débit d'air	Infiltration d'eau	Dimensions			
		l/h	Bar	TL	SW	D	H
ISO 12	205 12 9	25	0,5	10	17	18,8	11