DATA SHEET	CE9914
LWL-Splicecassette	Valid from: 26.03.2018

## **Description**

- Optical fiber splice cassette
- Standard mounting point
- Easy for fixing and maintenance



#### **General characteristics**

Splice capacity (max.) 24 (crimped splices)


alternatively: 12 (heat shrunk splices)

Adhered fiber bending radius (min.) 40mm

Temperature range -40°C to +80°C

Colour white Material ABS

## **Technical drawing**

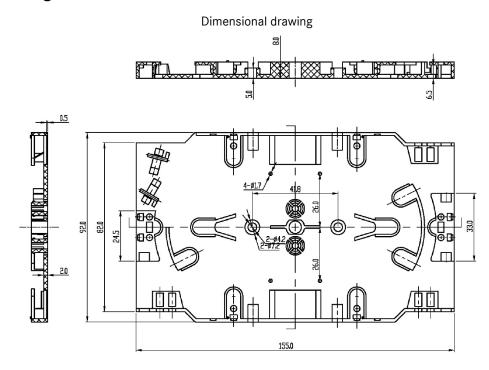

# **Application range**

Office, industrial machinery and plant engineering

#### Note

Photographs are not true to scale and do not represent detailed images of the respective products.

Document: DBCE9914EN	Page 1 of 1
Version: 00	