

Product designation	Enclosed rotary cam switch		
Product type designation	GX32		
<b>General characteristics</b>			
Switching diagram	83 - Multi-step 1-2-3-4 1 pole		
N° of elements	2		
Mounting form	P - Plastic enclosure with black handle		
<b>Contact characteristics</b>			
Rated insulation voltage $U_i$	IEC/EN	V	690
	UL/CSA	V	600
Rated impulse withstand voltage $U_{imp}$		kV	6
Conventional free air thermal current $I_{th}$	IEC/EN	A	32
	UL/CSA	A	32
Rated operational voltage		V	440
Rated operational impulse voltage		kV	4
Maximum fuse size for short-circuit protection $I_n$ (gG)	10kA	A	35
	15kA	A	35
	25kA	A	35
Rated short time current $I_{cw}$	1s	A	1000
Conductivity			10/5 mA/V
Operational current $I_e$ IEC/EN			
AC1/AC21A		A	32
AC15	110V	A	25
	220/230V	A	20
	380/400V	A	10
	660/690V	A	2
Rated operational power in AC			
Three-phase AC-3	220/230V	kW	7.5
	380/440V	kW	11
	500/690V	kW	11
Single-phase AC-3	110V	kW	1.8
	220/230V	kW	3.5
	380/440V	kW	5.5
Three-phase AC23A	220/230V	kW	8
	380/440V	kW	15
	500/690V	kW	15
Single-phase AC23A	110V	kW	2.2
	220/230V	kW	3.5
	380/440V	kW	6
Rated operational current in DC			


DC21A				
	48V	A		32
	60V	A		32
	110V	A		5
	220V	A		0.8
	440V	A		0.25
DC23A (poles in series)				
	24V	A		32 (1)
	48V	A		32 (2)
	60V	A		32 (3)
	110V	A		15 (3)
	220V	A		12 (4)
DC13				
	24V	A		32
	48V	A		25
	60V	A		14
	110V	A		3
	220V	A		0.5
	440V	A		0.15
Power dissipation		W		1.6
<b>Mechanical features</b>				
Terminals screw				M4
Tightening torque for terminals max		Nm		1.2
Conductor size				
AWG - Rigid cable				
	min	AWG		16
	Max	AWG		8
AWG - Flexible cable				
	min	AWG		16
	Max	AWG		10
Conductor size (IEC) - Flexible cable				
	min	mm <sup>2</sup>		1.5
	Max	mm <sup>2</sup>		6
Conductor size (IEC) - Rigid cable				
	min	mm <sup>2</sup>		1.5
	Max	mm <sup>2</sup>		10
Mechanical life		cycles		1X10 <sup>6</sup>
<b>UL technical data</b>				
Motor power for direct-on-line control				
for three-phase motor				
	120V	HP		3
	240V	HP		7.5
	480V	HP		15
	600V	HP		15
for single-phase motor				
	120V	HP		1.5
	240V	HP		3
<b>Ambient conditions</b>				
Temperature				
Operating temperature				
	min	°C		-25
	max	°C		+55
Storage temperature				
	min	°C		-40

max °C +70

**Resistance & Protection**


Frontal IP degree	IP65
Terminals IP degree	IP20

**Dimensions**

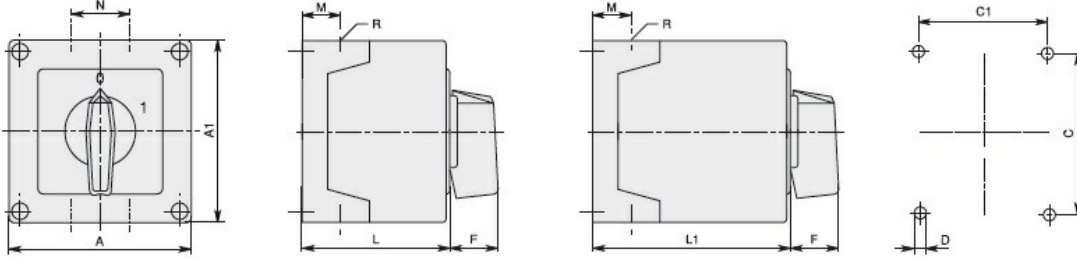

GX16	90x90	1 - 2	3 - 5	90	90	79	79	4.5	25	19	30	71.3	98.3	4xPG16	IP65
GX20		1 - 2	3 - 5												
GX16	110x110	1 - 3	4 - 7	110	110	98.4	83	4.5	32	21	39.5	85.5	119.5	4xPG21	IP65
GX20		1 - 3	4 - 7												
GX32		1 - 2	3 - 4												
GX40		1 - 2	3 - 4												

**Wiring diagrams**

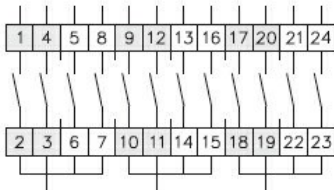

1	X			X			X								
2			X			X							X		
3			X			X		X							X
4		X			X					X				X	

83 —  
87 —  
94 —

**Certifications and compliance**

**Compliance**

- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-3
- IEC/EN/BS 60947-5-1
- IEC/EN/BS 61058-1

**Certificates**

EAC

**ETIM classification**

ETIM 8.0

EC001029 -  
Selector switch,  
complete