1SNK160112R0000 - ACTIVE

ENTRELEC

TE Internal #: 1SNK160112R0000 Terminal Block & Strip Marking Accessories, Marker Card, 101 -> 110 (x10) Mark Details, White, Vertical, -67 – 230 °F [-55 – 110 °C], UL 94V-2

View on TE.com >



Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Marking Accessories



Marking Product Type: Marker Card

Pre-Printed Mark Details: 101 -> 110 (x10)

Primary Product Color: White

Product Orientation: Vertical

Operating Temperature Range: -55 – 110 °C [-67 – 230 °F]

Features

Product Type Features

Marking Product Type

Marker Card

Configuration Features

Number of Cards per Package	1
Number of Digits per Marker - Horizontal	4
Number of Digits per Marker - Vertical	8
Pre-Printed Mark Details	101 -> 110 (x10)
Body Features	
Plastic & Resin Material Type	Polyamide
Product Weight	14 g[.494 oz]
Primary Product Color	White
Product Orientation	Vertical
Dimensions	
Product Depth	7.6 mm
Product Width	8 mm[.315 in]
Product Length	7.6 mm[.299 in]
Product Height	12 mm[.472 in]
Usage Conditions	

C For support call+1 800 522 6752

1SNK160112R0000

Terminal Block & Strip Marking Accessories, Marker Card, 101 -> 110 (x10) Mark Details, White, Vertical, -67 – 230 °F [-55 – 110 °C], UL 94V-2



Storage Temperature Range	-55 – 110 °C[-67 – 230 °F]
Operating Temperature Range	-55 – 110 °C[-67 – 230 °F]
Industry Standards	
UL Flammability Rating	UL 94V-2
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




1SNK160112R0000

Terminal Block & Strip Marking Accessories, Marker Card, 101 -> 110 (x10) Mark Details, White, Vertical, -67 – 230 °F [-55 – 110 °C], UL 94V-2



Customers Also Bought

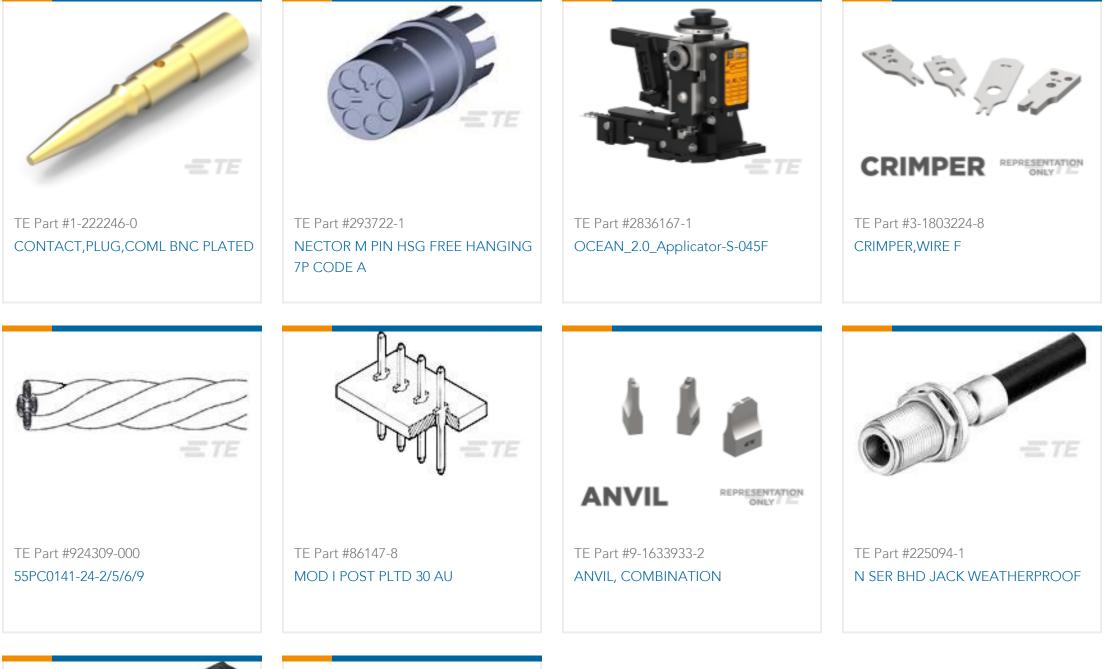



COMM. BNC-PLUG

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SNK160112R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SNK160112R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SNK160112R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ENTRELEC Terminal Block - Master Catalog

English

1SNK160112R0000

Terminal Block & Strip Marking Accessories, Marker Card, 101 -> 110 (x10) Mark Details, White, Vertical, -67 – 230 °F [-55 – 110 °C], UL 94V-2



MC812PA 101->110 (x10) Vertica

English

SNK SERIES TERMINAL BLOCKS

English

ENTRELEC Terminal Blocks Catalogue (RUS)