



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P36G34M-XXYZ	SEE SHEET 2

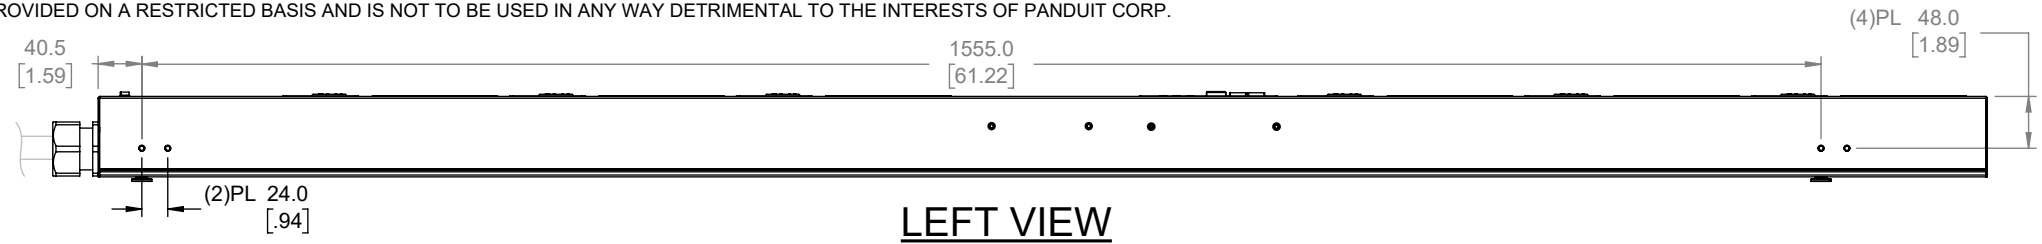

LEFT VIEW

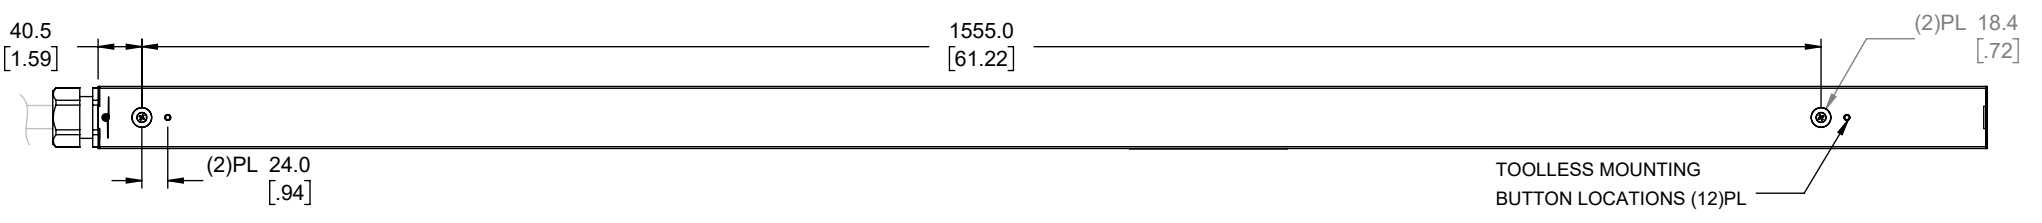

REAR VIEW

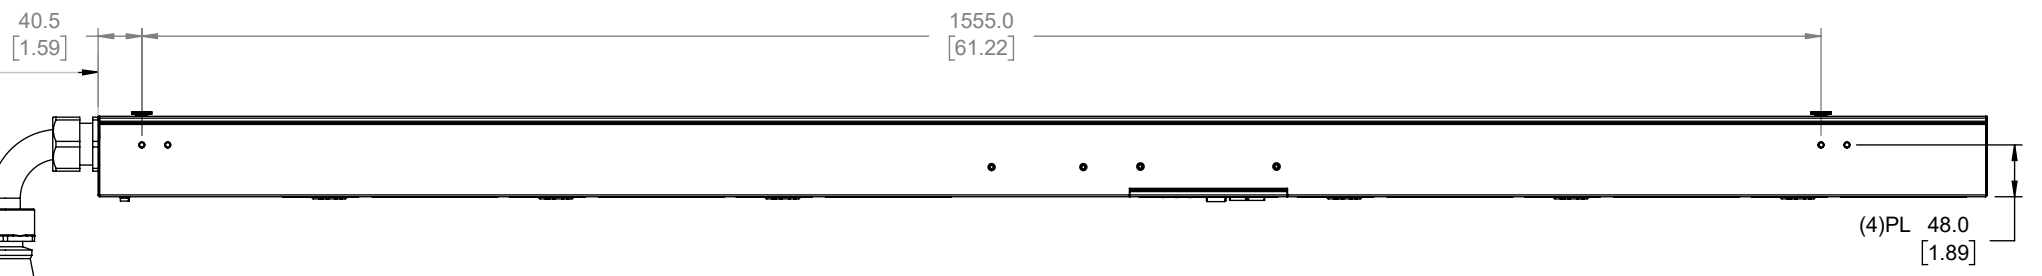

RIGHT VIEW

SPECIFICATION:

- 1. STANDARD
  - UNIT TYPE: MONITORED & SWITCHED PER OUTLET
  - ORIENTATION: VERTICAL, 0U FULL
  - OUTLET QTY & TYPE: (24)C13, (12)C19
  - INPUT VOLTAGE: 415VAC (NAM) / 346-415VAC (EMEA)
  - INPUT CURRENT: 60A (48A DERATED) / 63A
  - BREAKER QTY & TYPE: (12) 20A, SINGLE-POLE 10KAIC
  - INPUT PHASE: THREE-PHASE (WYE)
  - RATED POWER: DUAL-RATED: 34.6kVA (NAM) / 44.4kVA (EMEA)
  - INPUT PLUG: SEE TABLE SHEET 2
  - INPUT POWER CORD: SEE TABLE SHEET 2
  - REGULATORY STANDARD: RoHS COMPLIANT
- 2. ADDITIONAL:
  - OUTLET CONTROL RELAY: NORMALLY OPEN 80AMP INRUSH
- 3. ACCESSORIES:
  - (1) QUICK-START GUIDE


NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSIONS ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PRODUCT
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36G34M-XXYZ


XX: FINISHED GOOD COLOR BL = BLACK YL = YELLOW RD = RED BU = BLUE WH = WHITE GN = GREEN	Y: INPUT FEED TYPE 1 = TOP-END FED 2 = BOTTOM-END FED	Z: INPUT CORD LENGTH A = 1 METER B = 2 METER C = 3 METER
--	---	---

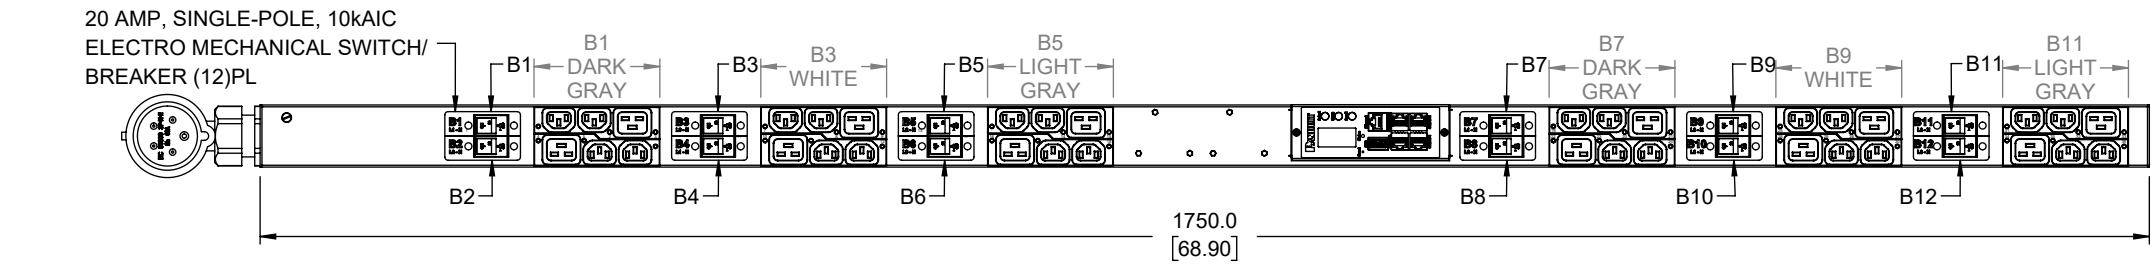

FRONT VIEW

BOTTOM VIEW

PLUG / RECEPTACLE BLOCK



**PLUG**  
IEC 60309, 4P 5W, 6H  
IP44 (SPASHPROOF)  
60A/ 63A, 415VAC MAX RATED INPUT  
(48A DERATED)



**RECEPTACLE**  
IEC 60320 C13  
10A, 250V MAX RATED OUTPUT



**RECEPTACLE**  
IEC 60320 C19  
16A, 250V MAX RATED OUTPUT

REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	04/08/2022	WAC	PJST	MJD	CORRECTION MADE TO CHASSIS LENGTH, INCREASED FROM 1679 TO 1750	P36G34M
01A	12/03/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G34M

REVISIONS

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, SIGN, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

TITLE: INTELLIGENT SERIES PDU  
**P36G34M-XXYZ**  
CUSTOMER DRAWING



UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: m m [IN]

Tolerance (mm)	
0<L≤50	+0.5
50<L≤250	+1.0
250<L≤500	+1.5
500<L≤1000	+2.5
1000<L≤2000	+4.0

MATERIAL: N/A  
DRAWING NUMBER: P36G34M\_DC

BY: WAC DATE: 11/10/2021 CHK: - SCALE: NTS SHEET 1 OF 2 SIZE: B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36G34M	MSPO PDU, 60AMP, (24)C13, (12)C19, IEC 60309 3P+E 6H-3M, TOP FED, BLACK	BLACK (9005)	3M (+254MM / -127MM) [10'(+10"/-5")]	12.6kg

B

B

A

A

REV.	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	04/08/2022	WAC	PJST	MJD	CORRECTION MADE TO CHASSIS LENGTH, INCREASED FROM 1679 TO 1750	P36G34M
01A	12/03/2021	WAC	PJST	MJD	INITIAL DC RELEASE	P36G34M
REVISIONS						

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN \_\_\_\_\_  
DATE \_\_\_\_\_  
PRINT \_\_\_\_\_

TITLE  
**INTELLIGENT SERIES PDU**  
**P36G34M-XXYZ**  
CUSTOMER DRAWING

ITEM REVISION NAME \_\_\_\_\_  
DATASET FILE NAME \_\_\_\_\_

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: m m [IN]

Tolerance (mm)	
0<L≤50	±0.5
50<L≤250	±1.0
250<L≤500	±1.5
500<L≤1000	±2.5
1000<L≤2000	±4.0

MATERIAL: **N/A**

DRAWING NUMBER: **P36G34M\_DC**

BY: **WAC** DATE: **11/10/2021** CHK: **-** SCALE: **NTS**

SHEET 2 OF 2 SIZE **B**