



# CLV640-6120

CLV64x

**FIXED MOUNT BARCODE SCANNERS**

**SICK**  
Sensor Intelligence.



## Ordering information

| Type        | Part no. |
|-------------|----------|
| CLV640-6120 | 1042023  |

Other models and accessories → [www.sick.com/CLV64x](http://www.sick.com/CLV64x)



## Detailed technical data

### Features

|                                     |   |
|-------------------------------------|---|
| <b>Version</b>                      | Standard Density                        |
| <b>Connection type</b>              | Ethernet                                |
| <b>Reading field</b>                | Oscillating mirror                      |
| <b>Sensor type</b>                  | Oscillating mirror                      |
| <b>Optical focus</b>                | Dynamic focus control                   |
| <b>Light source</b>                 | Light spot, laser, Visible, Red, 655 nm |
| <b>Light spot</b>                   | Circular                                |
| <b>Laser class</b>                  | 2 (IEC 60825-1:2014, EN 60825-1:2014)   |
| <b>Aperture angle</b>               | ≤ 50°                                   |
| <b>Reading distance</b>             | 45 mm ... 755 mm <sup>1)</sup>          |
| <b>Scanning frequency</b>           | 400 Hz ... 1,200 Hz                     |
| <b>Code resolution</b>              | 0.2 mm ... 1 mm                         |
| <b>Oscillating mirror functions</b> | Fixed (adjustable position)             |
| Oscillation frequency               | 0.5 Hz ... 6.25 Hz                      |
| Angle of deflection                 | -20° ... 20°                            |

<sup>1)</sup> For details see reading field diagram.

### Mechanics/electronics

|                          |  |
|--------------------------|--|
| <b>Connection type</b>   | 2 x M12 cylindrical connectors (12-pin male connector, 4-pin female connector) on swivel connector |
| <b>Supply voltage</b>    | 18 V DC ... 30 V DC  |
| <b>Power consumption</b> | 6.5 W  |
| <b>Housing</b>           | Aluminum die cast  |
| <b>Housing color</b>     | Light blue (RAL 5012)  |

<sup>1)</sup> Swivel connector is 15 mm longer.

<sup>2)</sup> At 25 °C.

|                               |                                      |
|-------------------------------|--------------------------------------|
| <b>Window material</b>        | Glass                                |
| <b>Enclosure rating</b>       | IP65 (EN 60529)                      |
| <b>Protection class</b>       | III (EN 61140)                       |
| <b>Weight</b>                 | 350 g, without connecting cable      |
| <b>Dimensions (L x W x H)</b> | 95 mm x 107 mm x 41 mm <sup>1)</sup> |
| <b>MTBF</b>                   | 100,000 h                            |
| <b>MTTF</b>                   | 40,000 h (Laser diode) <sup>2)</sup> |

<sup>1)</sup> Swivel connector is 15 mm longer.

<sup>2)</sup> At 25 °C.

## Performance

|   |  |
|---|--|
| <b>Readable code structures</b>               | 1D codes   |
| <b>Bar code types</b>                         | All current code types                                   |
| <b>Code printing process</b>                  | Label (printed codes)                                    |
| <b>Print ratio</b>                            | 2:1 ... 3:1  |
| <b>No. of codes per scan</b>                  | 1 ... 20 (Standard decoder)<br>1 ... 6 (SMART decoder)   |
| <b>No. of codes per reading interval</b>      | 1 ... 50 (auto-discriminating)                           |
| <b>No. of characters per reading interval</b> | 5,000<br>500 (for multiplexer function in CAN operation) |
| <b>No. of multiple readings</b>               | 1 ... 99   |

## Interfaces

|                               |  |
|-------------------------------|--|
| <b>Ethernet</b>               | ✓, TCP/IP, RS-232, RS-422, RS-485  |
| Type of fieldbus integration  | Optional over external fieldbus module CDF600<br>Optional over external fieldbus module CDF600-2   |
| Function                      | Data interface (read result output), Service interface<br>PROFINET Single Port, PROFINET Dual Port (optional via external connection module CDF600-2)<br>Data interface (read result output), Service interface<br>SICK CAN sensor network CSN (CAN controller/CAN device, multiplexer/server) |
| Data transmission rate        | 10/100 MBit/s<br>10/100 MBit/s<br>10/100 MBit/s<br>2,400 Baud ... 115.2 kBaud, AUX: 57.6 kBaud (RS-232)<br>20 kbit/s ... 1 Mbit/s<br>20 kbit/s ... 1 Mbit/s  |
| <b>Digital inputs</b>         | 3 ("Sensor 1", 2 inputs via optional parameter storage CMC600 in CDB620/CDM420)  |
| <b>Digital outputs</b>        | 2 (Via optional CMC600 parameter memory in CDB620/CDM420)  |
| <b>Reading pulse</b>          | Digital inputs   |
| <b>Optical indicators</b>     | 6 LEDs (Ready, Result, laser, Data, CAN, LNK TX, Bar graph for displaying the reading rate percentage (10 LEDs))   |
| <b>Acoustic indicators</b>    | Beeper/buzzer (can be switched off, can be allocated as a result indication function)  |
| <b>Control elements</b>       | 2 buttons (choose and start/stop functions)  |
| <b>Configuration software</b> | SOPAS ET   |
| <b>Memory card</b>            | MicroSD memory card (flash card), optional   |

## Ambient data

|  |  |
|--|--|
| <b>Electromagnetic compatibility (EMC)</b> | EN 61000-6-3 (2001-10) / EN 61000-6-2:2005 |
|--|--|


|                                      |                      |
|--------------------------------------|----------------------|
| <b>Vibration resistance</b>          | EN 60068-2-6 (1995)  |
| <b>Shock resistance</b>              | EN 60068-2-27 (1993) |
| <b>Ambient operating temperature</b> | 0 °C ... +40 °C      |
| <b>Storage temperature</b>           | -20 °C ... +70 °C    |
| <b>Permissible relative humidity</b> | 90 %, Non-condensing |
| <b>Ambient light immunity</b>        | 2,000 lx, on barcode |
| <b>Bar code print contrast (PCS)</b> | ≥ 60 %               |

Classifications

|                       |          |
|-----------------------|----------|
| <b>ECLASS 5.0</b>     | 27280102 |
| <b>ECLASS 5.1.4</b>   | 27280102 |
| <b>ECLASS 6.0</b>     | 27280102 |
| <b>ECLASS 6.2</b>     | 27280102 |
| <b>ECLASS 7.0</b>     | 27280102 |
| <b>ECLASS 8.0</b>     | 27280102 |
| <b>ECLASS 8.1</b>     | 27280102 |
| <b>ECLASS 9.0</b>     | 27280102 |
| <b>ECLASS 10.0</b>    | 27280102 |
| <b>ECLASS 11.0</b>    | 27280102 |
| <b>ECLASS 12.0</b>    | 27280102 |
| <b>ETIM 5.0</b>       | EC002550 |
| <b>ETIM 6.0</b>       | EC002550 |
| <b>ETIM 7.0</b>       | EC002550 |
| <b>ETIM 8.0</b>       | EC002550 |
| <b>UNSPSC 16.0901</b> | 43211701 |


Dimensional drawing (Dimensions in mm (inch))

CLV63x/64x/65x, JEF3xx, JEF5xx, Ethernet, oscillating mirror

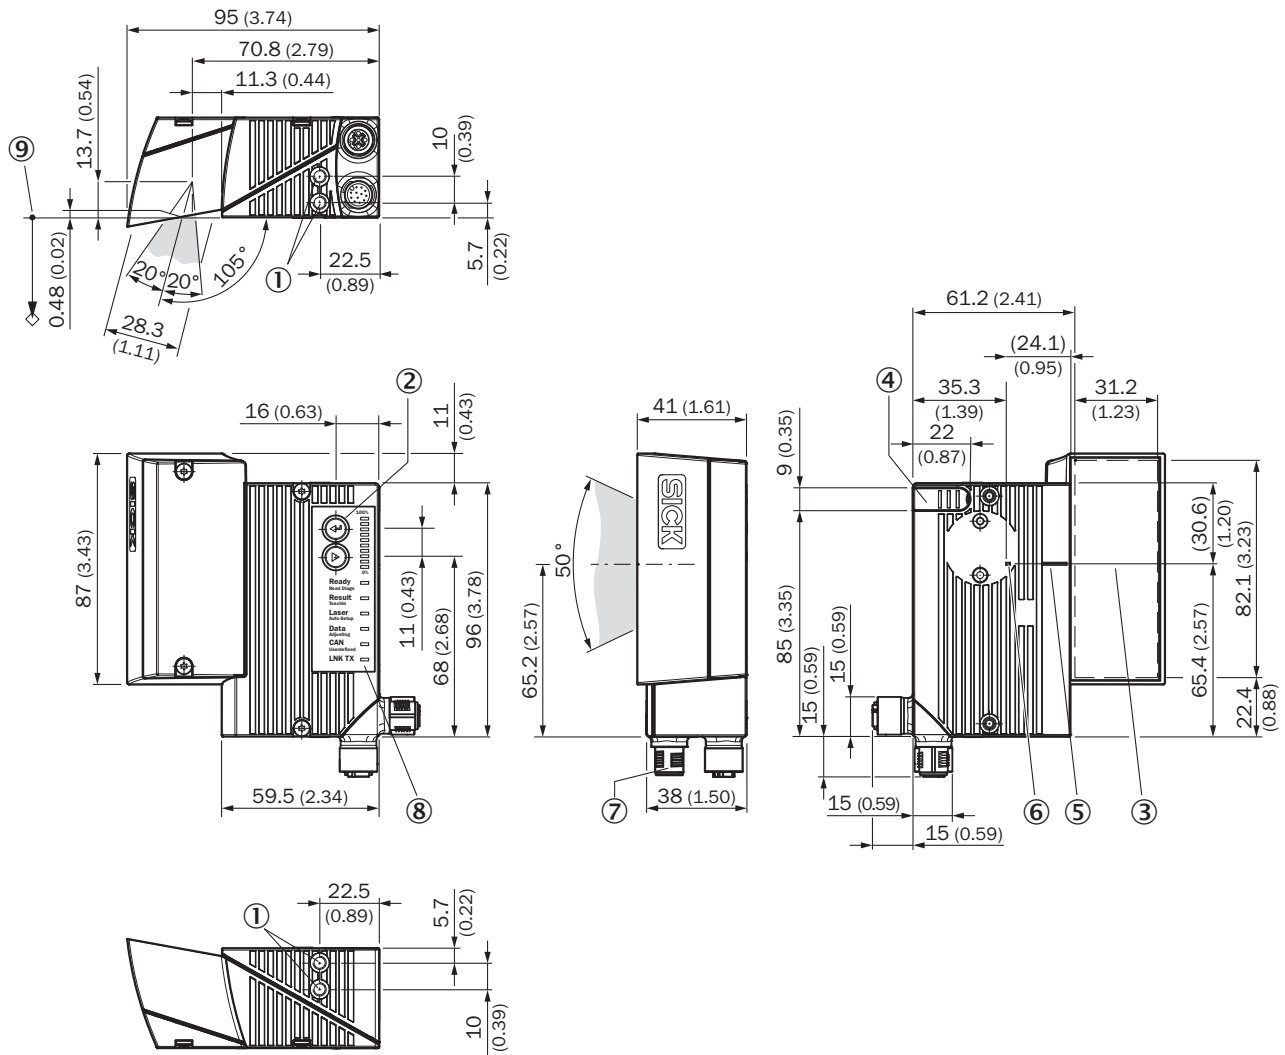


- ① Blind hole thread M5, 5 mm deep (2 x), for mounting
- ② Function button (2 x)
- ③ Reading field
- ④ Cover for the microSD memory card
- ⑤ Central position of the deflected laser beam in the V-shaped aperture angle
- ⑥ Internal impact point: rotation point of the variable direction laser beam
- ⑦ M12 round connectors (1 x 12-pin or 1 x 17-pin male connector, A-coded, 1 x 4-pin female connector, D-coded) with swivel connector
- ⑧ LED status indicator (6x) and bar graph
- ⑨ Reference point for reading distance (from housing edge to object)

### Reading field diagram

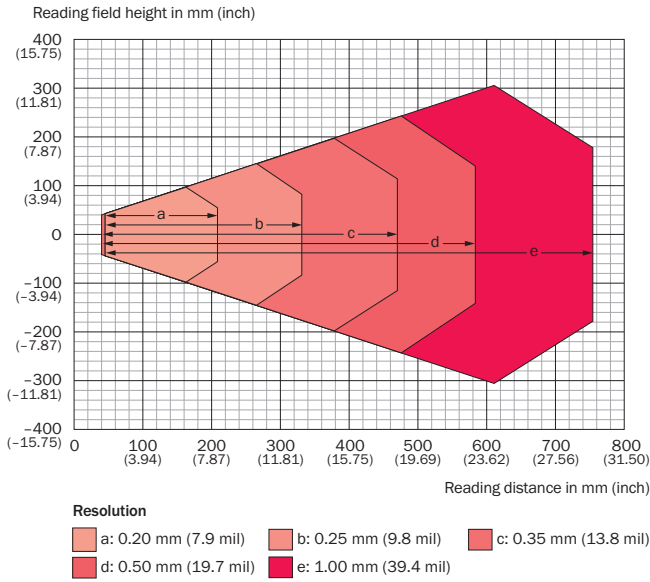


The depth of field is reduced by approx. 10% for devices with plastic lenses.

### Deflection width

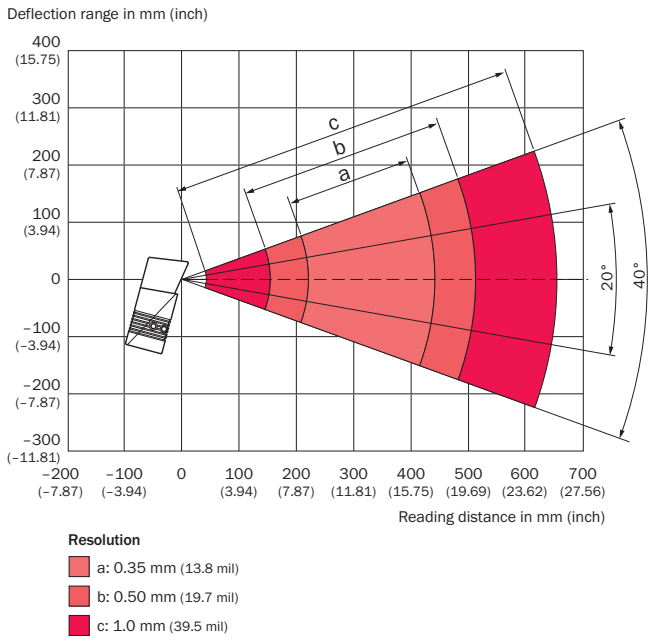


① Diagram applies to focus position of 280 mm

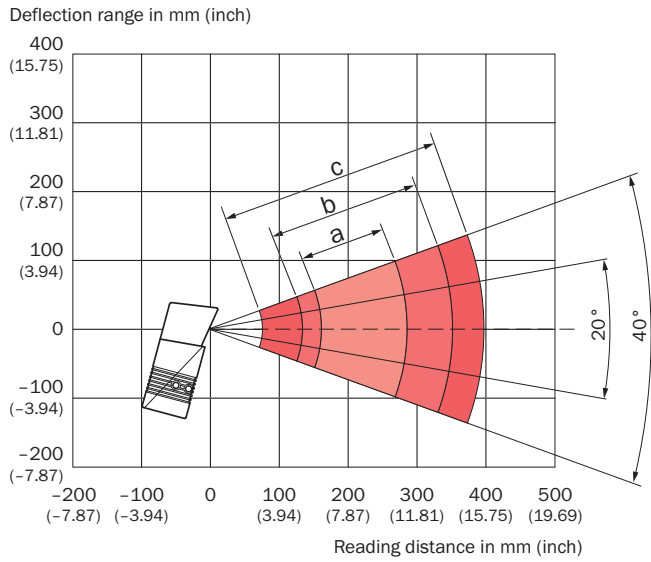

**Resolution**

- a: 0.25 mm (9.8 mil)
- b: 0.35 mm (13.8 mil)
- c: 0.50 mm (19.7 mil)

① Diagram applies to focus position of 215 mm

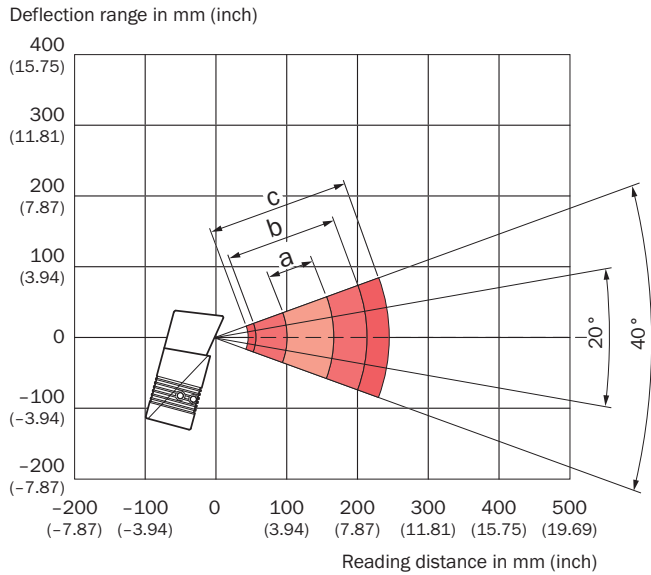






**Resolution**

- a: 0.20 mm (7.9 mil)
- b: 0.35 mm (13.8 mil)
- c: 0.50 mm (19.7 mil)

① Diagram applies to focus position of 140 mm

### Recommended accessories

Other models and accessories → [www.sick.com/CLV64x](http://www.sick.com/CLV64x)

|  | Brief description  | Type                | Part no. |
|--|--|---------------------|----------|
| <b>Cloning modules</b>   |  |                     |          |
|   | External parameter memory for integration in CDB620/CDB650/CDM42x  | CMC600-101          | 1042259  |
| <b>Storage media</b>   |  |                     |          |
|   | microSD memory card with 1 GB for industrial use   | microSD memory card | 4051366  |
| <b>Mounting brackets and plates</b>  |  |                     |          |
|   | Hanger-shaped mounting bracket, mounting hardware included   | Mounting bracket    | 2042800  |
| <b>Plug connectors and cables</b>  |  |                     |          |
|   | <ul style="list-style-type: none"> <li>• <b>Connection type head A:</b> Male connector, M12, 4-pin, straight, D-coded</li> <li>• <b>Connection type head B:</b> Male connector, RJ45, 4-pin, straight</li> <li>• <b>Signal type:</b> Ethernet, PROFINET</li> <li>• <b>Cable:</b> 2 m, 4-wire, PUR, halogen-free</li> <li>• <b>Description:</b> Ethernet, PROFINET, shielded</li> <li>• <b>Application:</b> Drag chain operation, Zones with oils and lubricants</li> </ul> | YM2D24-020PN1MRJA4  | 2106182  |
| <b>Modules</b>   |  |                     |          |
|  | <ul style="list-style-type: none"> <li>• <b>Sub product family:</b> CDB620</li> <li>• <b>Supported products:</b> CLV61x - CLV65x, Lector62x, RFH6xx, RFU62x</li> <li>• <b>Brief description:</b> Small connection module for one sensor, 4 cable glands, base for CMC600</li> </ul>  | CDB620-001          | 1042256  |

### Recommended services

Additional services → [www.sick.com/CLV64x](http://www.sick.com/CLV64x)

|   | Type                            | Part no. |
|---|---------------------------------|----------|
| <b>Performance check</b>  |                                 |          |
| <ul style="list-style-type: none"> <li>• <b>Product area:</b> Fixed mount barcode scanners</li> <li>• <b>Range of services:</b> Inspection of defined functions, e.g., reading performance</li> <li>• <b>Travel expenses:</b> The prices do not include travel costs such as hotel, flight, travel time and expenses.</li> <li>• <b>Duration:</b> Additional work will be invoiced separately</li> </ul>  | Performance check CLV4xx/CLV6xx | 1682028  |
| <b>Commissioning</b>  |                                 |          |
| <ul style="list-style-type: none"> <li>• <b>Product area:</b> Fixed mount barcode scanners</li> <li>• <b>Range of services:</b> Inspection of connection, fine adjustment, optimization of parameters of SICK product as well as tests, Setup of previously defined functions of reading configuration, code configuration, data processing and network, interfaces or inputs and outputs</li> <li>• <b>Travel expenses:</b> The prices do not include travel costs such as hotel, flight, travel time and expenses.</li> <li>• <b>Duration:</b> Additional work will be invoiced separately</li> </ul> | Commissioning CLV61x ... CLV64x | 1681925  |



|  | Type   | Part no. |
|--|--|----------|
| Extended warranty  |  |          |
| <ul style="list-style-type: none"><li>• <b>Product area:</b> Identification solutions, machine vision, Detection and ranging solutions, safety camera sensors, Safety laser scanners, Safety radar sensors</li><li>• <b>Range of services:</b> The services correspond to the scope of the statutory manufacturer warranty (SICK general terms of delivery).</li><li>• <b>Duration:</b> Five-year warranty from delivery date.</li></ul> | Extended warranty for a total of five years from delivery date | 1680671  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)