




| | |
|--------------------------------|--|
| Product designation | Selector switch actuator key - 3 position |
| Product type designation | LPFS33 |
| General characteristics | |
| Colour | Black |
| Type of positions | Selector switch |
| Material | Aluminium and zinc alloy for the metal part, polyamide for plastic parts |
| IEC degree of protection | IP66, IP67 and IP69K |

| | |
|----------------------------|--------------------------|
| Mechanical features | |
| Mechanical life | cycles 1000000 |
| Fixing | Without mounting adapter |
| Mounting adapter | LPXAU120M |

| | |
|--------------------------|------------------------------|
| UL technical data | |
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |

| | |
|---------------------------|--------------------------|
| Ambient conditions | |
| Temperature | |
| Operating temperature | min °C -25 max °C +70 |
| Storage temperature | min °C -40 max °C +85 |

Dimensions

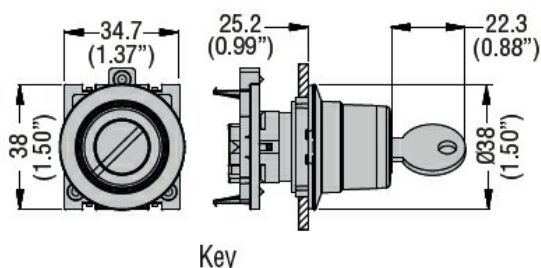

| | |
|--------------------------------------|--|
| Certifications and compliance | |
| Compliance | CSA C22.2 n° 14 IEC/EN/BS 60947-1 IEC/EN/BS 60947-5-1 UL508 |

| | |
|--------------|--|
| Certificates | |
|--------------|--|

cULus

ETIM classification

ETIM 8.0

EC002611 -
Control switch