



Signal tower Ø70mm/2.75" 8TL7GL - Light mudules


Product designation


Product type designation

General characteristics		
Diameter	mm - inc	h 70/2.75
Supply voltage (AC)	V	230240
Colour		Orange
IEC degree of protection		IP65
Mechanical features		
Weight	g	83
Ambient conditions		
Temperature		


Operating temperature

•	U	•		min	°C	-20	
				max	°C	+50	
							/ · · · · ·







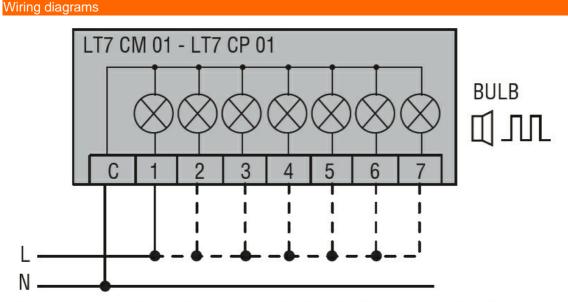

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and	l compliance	
Compliance		
	CSA C22.2 n° 14	
	IEC/EN 60947-1	
	IEC/EN 60947-5-1	
	UL508	
Certificates		
	cULus	
	EAC	
ETIM classification	n	
		EC000232 -
ETIM 8.0		Optical module

8LT7GLM1

for signal tower