

TX6A™ 10Gig™ UTP Copper Cable with MaTriX Technology – Middle East

specifications


Category 6A/Class E_A cable shall be constructed of 23 AWG copper conductors with HDPE Low Smoke Zero Halogen (LSZH) insulation. The copper conductors shall be twisted in pairs and separated by a cross-divider. All four pairs shall be surrounded by MaTriX tape and a flame retardant jacket. The MaTriX tape shall suppress the effect of alien crosstalk allowing 10 Gb/s transmission, while minimizing cable diameter. The innovative cable design shall provide installation flexibility as cables can be routed in tight bundles through pathways and spaces.



technical information

Category 6A/Class E_A channel performance:	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds the requirements of ISO 11801 Class E _A standards swept up to 650 MHz for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the Panduit® TX6A™ 10Gig™ UTP Copper Cabling System.
Cable diameter:	HDPE (LSZH): 7.6mm (.300 in.) nominal
Conductors/insulators:	23 AWG solid copper insulated with flame retardant HDPE (LSZH)
Flame rating:	HDPE (LSZH-1): IEC 60332-1, 60754-2, 61034-2 HDPE (LSZH-3): IEC 60332-3-22 EN 50575: Euroclass Eca
PoE compliant:	Meets IEEE 802.3af, IEEE 802.3at and IEEE 802.3bt for PoE applications
Country of origin:	UK
Installation tension:	25 lbf (110 N) maximum
Temperature rating:	0°C to 60°C (32°F to 140°F) during installation -20°C to 70°C (-4°F to 158°F) during operation
Cable jacket:	HDPE (LSZH)
Cable weight:	LSZH: 16.3 kg/305m (36.0 lbs./1000 ft.)
Packaging:	LSZH: 17.6kg/305m (38.8 lbs./1000 ft.) Package tested to ISTA procedure 1A

key features and benefits

MaTriX Technology 	MaTriX tape delivers superior PSANEXT and PSAACRF suppression
Round cable design	Improves fill capacity, cable management, reduces required bend radius and allows efficient use of pathways and spaces
Highest density	All testing based on 48-port/1RU panels
Descending length cable markings	Easy identification of remaining cable to reduce installation time and cable scrap

applications

The TX6A™ 10Gig™ UTP Copper Cable with MaTriX Technology is a component of the TX6A™ 10Gig™ Copper Cabling System. Interoperable and backward compatible, this end-to-end system provides design flexibility to protect network investments well into the future.

Key applications include:

- 10GBASE-T Ethernet
- Data center I/O consolidation
- Data center server virtualization
- Consolidation of network interconnects
- Back-bone aggregation
- Parallel processing and high speed computing

TX6A™ 10Gig™ UTP Copper Cabling System with MaTriX Technology

TX6A™ 10Gig™ UTP Copper Cable with MaTriX Technology

LSZH (60332-1): PUL6A04WH-KEG

LSZH (60332-3): PUZ6A04WH-KEG

Mini-Com® TX6A™ 10Gig™ UTP Jack Module

Jack module: CJ6X88TG**

Shuttered jack module: CJH688TG**

TX6A™ 10Gig™ UTP Patch Cords with MaTriX Technology

Meter lengths: UTP6A^^M

Foot lengths: UTP6A^

Mini-Com® Angled Modular Patch Panels

24-port, 1 RU: CPPA24FMWBLY

48-port, 2 RU: CPPA48FMWBLY

72-port, 2 RU: CPPLA72WBLY

Mini-Com® Flat Modular Patch Panels

24-port, 1 RU: CPP24FMWBLY

48-port, 1 RU: CPP48HDWBLY

48-port, 2 RU: CPP48FMWBLY

72-port, 2 RU: CPP72FMWBLY

For additional modular patch panels reference www.panduit.com

Cable Prep Tools

Wire snipping tool: CWST

Wire stripping tool: CJAST

Cable bundle organizing tool: CBOT24K

**To designate color, add suffix IW (Off White), EI (Electric Ivory), IG (International Gray), WH (White), AW (Arctic White), BL (Black), OR (Orange), RD (Red), BU (Blue), GR (Green), YL (Yellow), or VL (Violet) to end of the part number.

^Add length, then color to end of part number: 1M to 10M (one meter increments), 1.5M, 2.5M, 15M, and 20M. 3 to 20 feet (one foot increments), 25, 30, 35, and 40 ft. Color is off white unless color code is added to end: BL (Black), BU (Blue), RD (Red), YL (Yellow), GR (Green), OR (Orange), VL (Violet). Example: Blue, 5-meter patch cord is UTP6A5MBU


Contact Customer Service for keyed connectivity bulk packaged jack modules and patch cords.

TX6A™ 10Gig™ UTP Copper Cable with MaTriX Technology

additional specifications

Mechanical Test	
Ultimate Breaking Strength	> 90 lbf (400 N)
Minimum Bend Radius	4 x cable diameter
Electrical Test	
DC Resistance	<9.38 Ohm per 328 ft. (100m)
DC Resistance Unbalance	<5%
Mutual Capacitance	<5.6 nF per 328 ft. (100m) at 1 kHz
Capacitance Unbalance	<330 pF per 328 ft. (100m) at 1 kHz
Characteristic Impedance	100 Ohm +/-15% up to 100 MHz
Nominal Velocity of Propagation (NVP)	Panduit 68%
Operating Voltage, Maximum	80V

cable construction

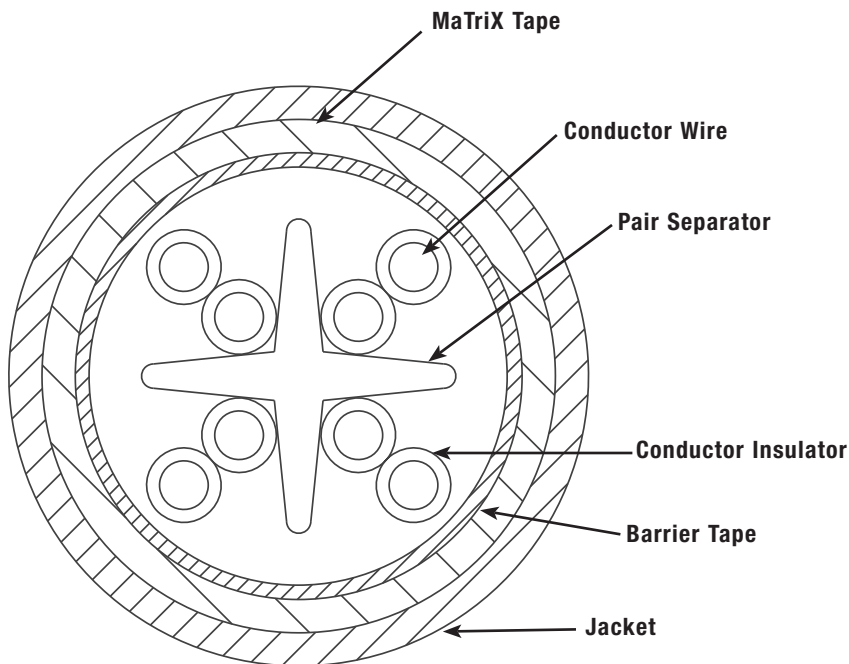

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
cs-emea@panduit.com
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
cs-ap@panduit.com
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
cs-japan@panduit.com
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
cs-la@panduit.com
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
cs-aus@panduit.com
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

For more information

Visit us at www.panduit.com

Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

PANDUIT™

© 2020 Panduit Corp.
ALL RIGHTS RESERVED.
COSP410--WW-ENG
2/2020