

LUMINAIRES - PROJECTEURS EXTÉRIEUR

EN-FLH10


Product Description:

La gamme de projecteur IP65 QuaZar™ intgre le meilleur de la technologie LED haute tension. Grâce son profil ultra mince et ses grandes performances, il est maintenant possible d'éclairer les espaces extérieurs et jardins sans sacrifier l'apparence et la discrétion. Disponible en 10W, 20W, 30W et 50W, en finition noir et blanc.


Product Image:



Line Drawing

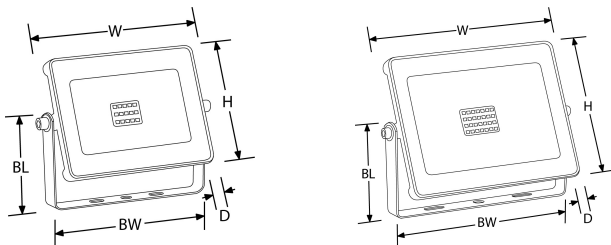

Polar Curve

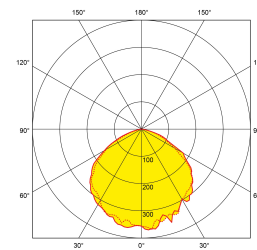

Product Specs:

Technology	LED	Input Voltage	180-265V AC
Lamp Base	Aucun	Positional Adjustment	Orientable
Number of LEDs	15	Luminaire Distribution	Direct
Lifetime L70 (hrs)	25.000	Input Frequency	50/60HZ
Dimmable	Non	Dali	Non
IP Rating	IP65	IK Rating	IK06
Operating Env. Temp. (Min) °C	-30°C	Operating Env. Temp. (Max) °C	40°C
Optic Material	Verre	Power Factor	0.9
Height (mm)	93	Width (mm)	121
Weight (Kg)	0.391		

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-FLH10BLK/30	10	120	900	90	70	3000	Noir
EN-FLH10BLK/40	10	120	900	90	70	4000	Noir
EN-FLH10W/30	10	120	900	90	70	3000	Blanc
EN-FLH10W/40	10	120	900	90	70	4000	Blanc

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office

Apex Park

6 Little Burrow

Welwyn Garden City AL7 4SW

United Kingdom

Tel : +44 (0) 1727 83 66 11