



Product designation


Signal tower Ø70mm/2.75" 8TL7FL - Light mudules

Product type designation


General characteristics			
Diameter	m	ım - inch	70 / 2.75
Supply voltage (AC)		V	110120
Colour			Blue
IEC degree of protection			IP65
Light consumption per module (AC)		mΑ	20
Light consumption per module (DC)		mΑ	20
Sound module consumption (AC)		mΑ	20
Sound module consumption (DC)		mΑ	20
Mechanical features			
Weight		g	92
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-20
	max	°C	+50
Dimensions			



ENERGY AND AUTOMATION

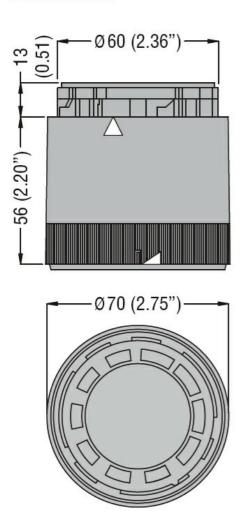

Wiring diagrams

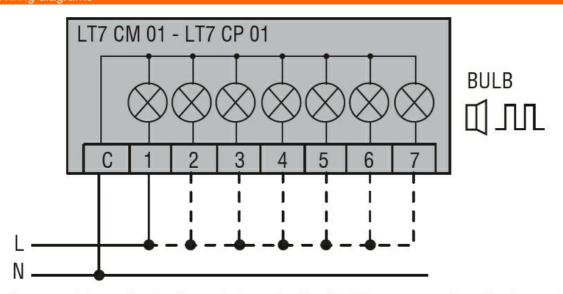

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and compliance

Compliance

CSA C22.2 n° 14



ENERGY AND AUTOMATION

8LT7FLE6

FLASH MODULE. Ø70MM. WITH 4-JOULE XENON BULB, BLUE, 110...120VAC

	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0

EC000232 -Optical module for signal tower