


PRÉSENTATION DU PRODUIT



BIR : commande seule précâblée



BPIR (encastré ou mise en saillie) : commande sur plaque braille



BPIR68 (encastré) : commande sur plaque braille



DEEE & RoHS




Certification CE

Caractéristiques	BIR	BPIR	BPIR68
Dimensions (LxIxh)	32xØ28 mm	80x38xØ28 mm	80x80xØ28 mm
Voltage	12V DC		
Relais	NO ou NC		
Pouvoir de coupure	Max. 2A/24V		

Correspondance de câblage	
+12 V	Rouge
0V	Noir
NC	Blanc
C	Jaune
NO	Vert

INSTALLATION BPIR - BPIR68

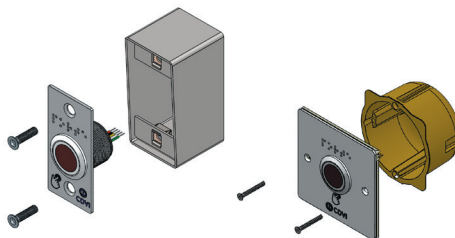

Cadre de mise en saillie CBP (non fourni)




www.cdvigroup.com

*Garantie 10 ans


PRODUCT PRESENTATION



BIR : Single switch pre wired



BPIR (surface or flush): switch on braille plate



BPIR68 (flush): switch on braille plate



DEEE & RoHS




Certification CE

Features	BIR	BPIR	BPIR68
Dimensions (LxIxh)	32xØ28 mm	80x38xØ28 mm	80x80xØ28 mm
Voltage	12 vdc		
Relay	NO or NC		
Monitoring input voltage	Max. 2A/24V		

Wiring correspondance	
+12 V	Red
0V	Black
NC	White
C	Yellow
NO	Green

BPIR - BPIR68 INSTALLATION

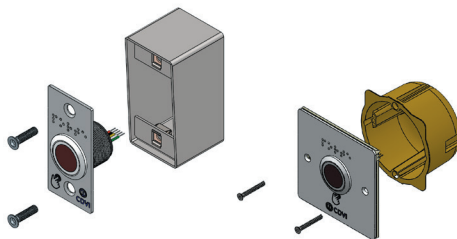

Surface-mounting frame CBP (not included in scope of supply)



www.cdvigroup.com