


PANDUIT P/N	WEIGHT
P24B12M	7.0kg


NOTES:

- IDENTIFICATION:


UNIT TYPE:	BASIC
ORIENTATION:	VERTICAL, 0U FULL
OUTLET QTY&TYPE:	(12) C13, (12) C19
BREAKER QTY&TYPE:	(6) 16AMP, SINGLE-POLE
INPUT VOLTAGE:	200-240/346-415VAC, WYE
INPUT CURRENT:	32A
INPUT PHASE:	THREE-PHASE WYE
RATED POWER:	22.0kVA
INPUT PLUG:	IEC 60309 3P+N+E 6H 32A
INPUT CORD LENGTH:	3m [10']
- ACCESSORIES:
POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 22.0 kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES

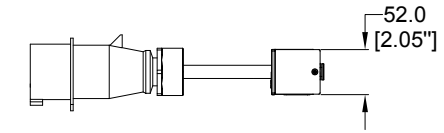


SIDE VIEW

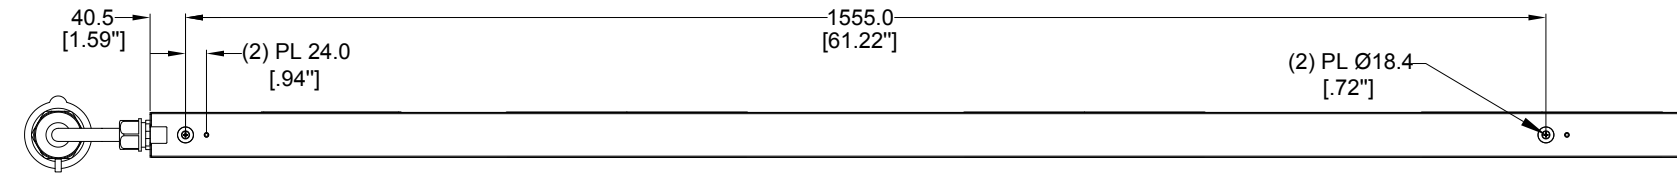

REAR VIEW

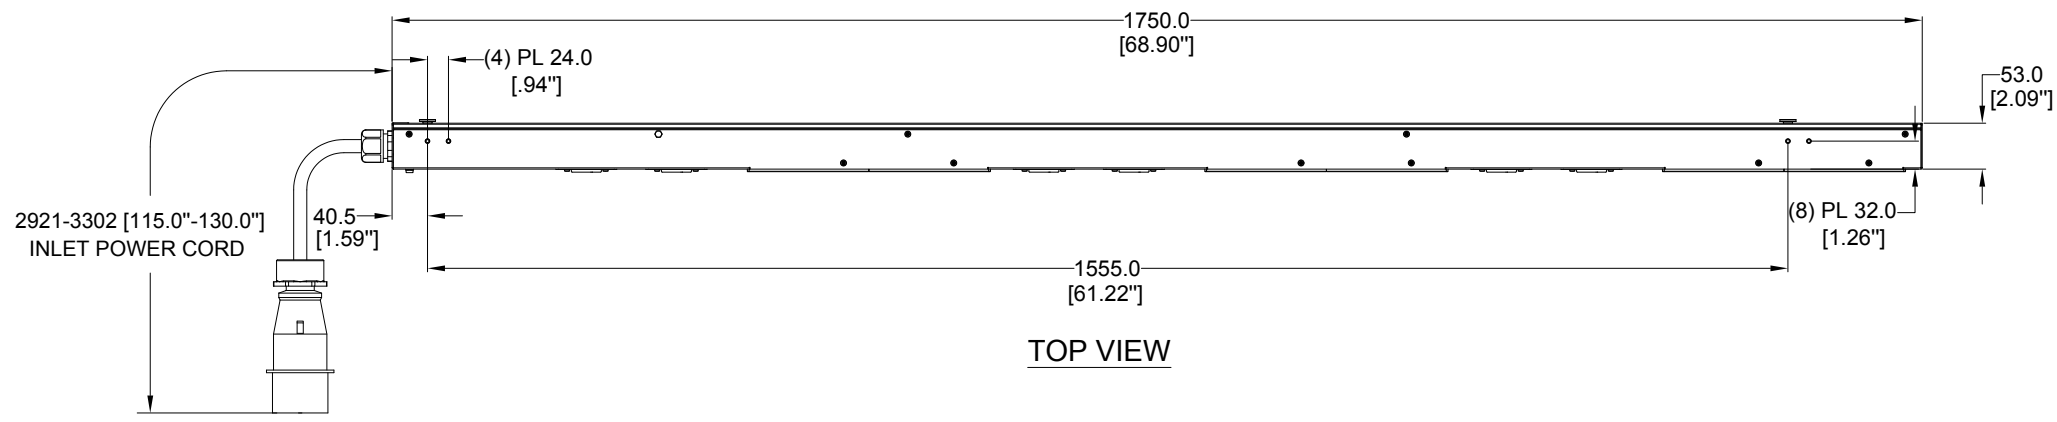


TOP VIEW

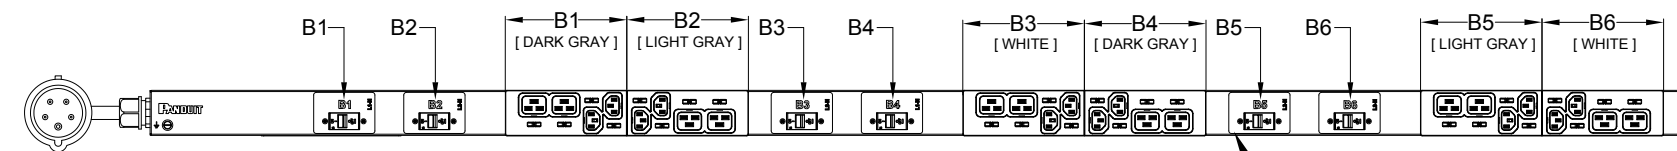


FRONT VIEW

16 AMP, SINGLE - POLE
ELECTRO MECHANICAL
SWITCH / BREAKER (6) PLACES



PLUG
32 AMP, 230/400V x 3~ WYE
4P/5W
IEC 60309, SPLASHPROOF, IP44
2P (S); 4T (W), 6H;

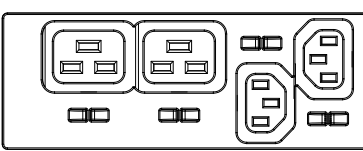

TWELVE (12)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

TWELVE (12)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	DI.ZHAI	MIM	EDM	REVISED TOLERANCES	P24B12M
01A	06/28/2017	DI.ZHAI	MIM	EDM	INITIAL RELEASE	P24B12M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE: BASIC SERIES PDU P24B12M CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24B12M_DC
DRAWN BY: Di.Zhai	DATE: 05/24/2017	SCALE: SHT 1 OF 1
CHK: SEAN	SCALE: NONE	SCALE: B