

TECHNICAL DATA

Product type	<u>Adapter Connector</u>
Product NO.	<u>MA3FJ3</u>

MA3FJ3 Product Appearance



Product features

- 3pin XLR female<=>6.35mm female connector
- Strong zinc die-casting shell, long life and high reliability.

Technical parameters

1. Product parameters

Connection Type	Adapter
-----------------	---------

2. Electrical parameters

Contact resistance	≤3mΩ (inner, XLR) ≤6mΩ (outer)
Dielectric strength	1.5kVdc (XLR) 1kVdc (Jack)
Insulation resistance	>2GΩ


3. Mechanical parameters

Service life	> 1000 mating cycles
Locking device	Latch lock

4. Material and environmental parameters

Contacts	Cu alloy
Contact plating	Au
Insert	Polyamide (PA66 +30 % GF)
Locking element	Zinc diecast (ZnAl4Cu1)
Shell	Zinc diecast (ZnAl4Cu1)
Shell plating	Cr
Protection class	IP40
Temperature range	-20°Cto +65°C

Product Profile

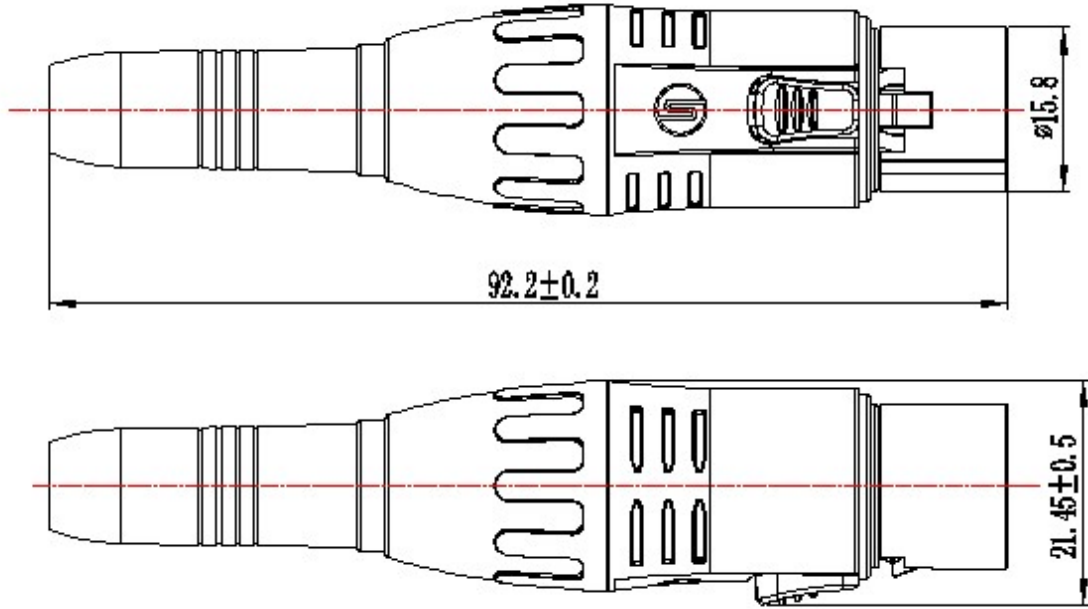

mm