



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P24D40M-XXYZ	SEE SHEET 2

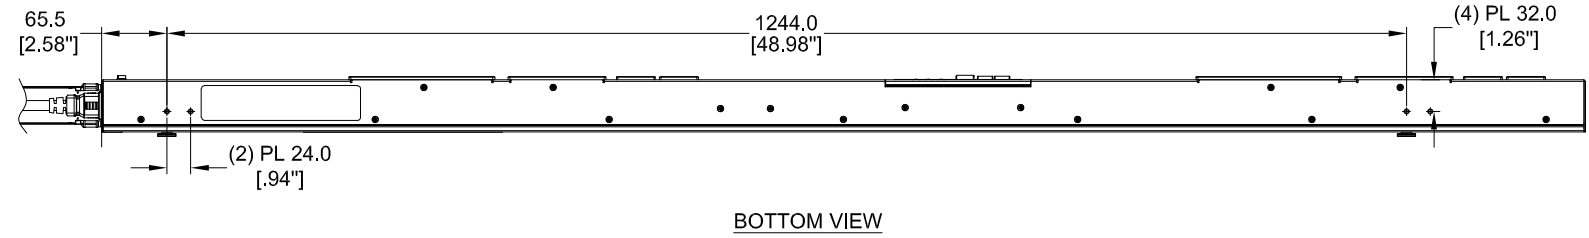


BOTTOM VIEW

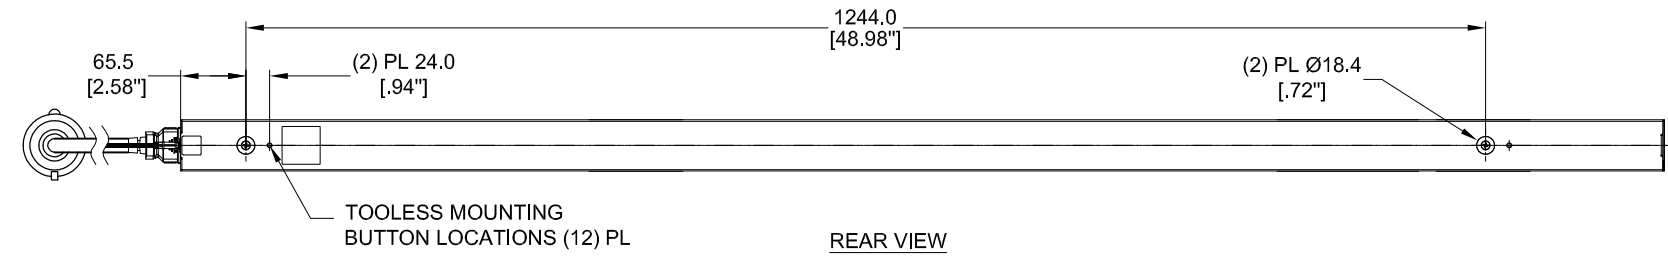


REAR VIEW

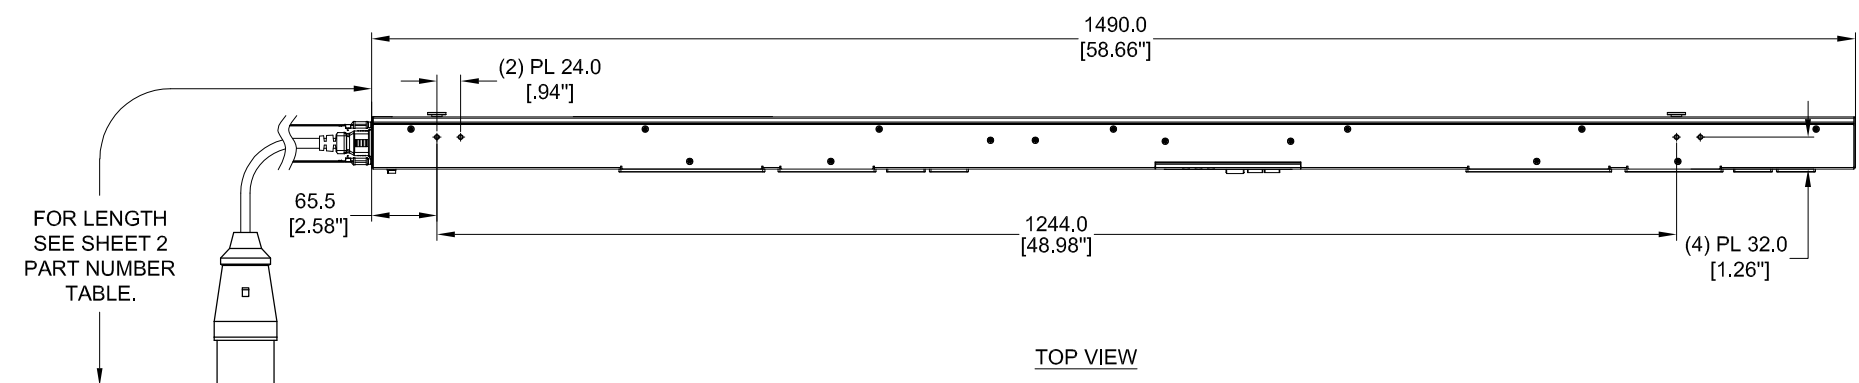

TOP VIEW

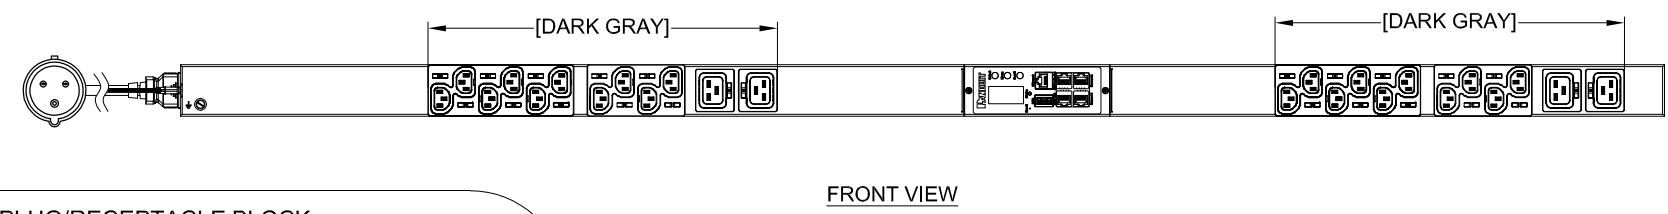

FRONT VIEW



SIDE VIEW

SPECIFICATION:


- STANDARD:
 - UNIT TYPE: MONITORED INPUT
 - ORIENTATION: VERTICAL, MID
 - OUTLET QTY&TYPE: (20) C13, (4) C19
 - INPUT VOLTAGE: 100-240VAC
 - INPUT CURRENT: 16A
 - BREAKER QTY&TYPE: N/A
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 3.7kVA
 - INPUT PLUG: IEC 60309 2P+E 6H 16A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24D40M-XX Y Z

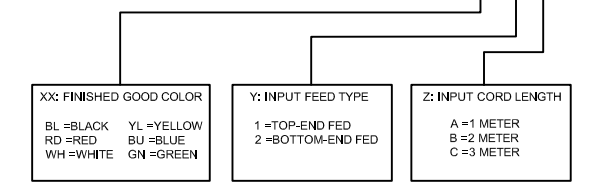

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPASHPROOF)
16A, 250V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P24D40M
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24D40M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24D40M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		N/A
THIRD ANGLE PROJECTION		DRAWING NUMBER: P24D40M_DC
DRAWN BY GEORGE	DATE 06/27/2017	SCALE NONE
CHK SEAN	SHT 1 OF 2	
		SCALE B

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24D40M	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-BL1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-BL1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-RD1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-RD1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-RD1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-WH1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-WH1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-WH1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-YL1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-YL1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-YL1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-BU1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-BU1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-BU1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-GN1A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-GN1B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-GN1C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-BL2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-BL2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-BL2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-RD2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-RD2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-RD2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-WH2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-WH2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-WH2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-YL2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-YL2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-YL2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-BU2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-BU2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-BU2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg
P24D40M-GN2A	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'+3.5"/-1.75"	6.2kg
P24D40M-GN2B	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'+7"/-3.5"	6.5kg
P24D40M-GN2C	VERTICAL,(20) C13,(4)C19,MONITORED INPUT,100-240V/16A/1 PHASE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'+10"/-5"	6.8kg

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24D40M-XXYZ CUSTOMER DRAWING		
ITEM REVISION NAME:		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR:
 THIRD ANGLE PROJECTION		N/A
Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P24D40M_DC
DRAWN BY	DATE	SCALE
GEORGE	06/27/2017	NONE
CHK	SCALE	SHT 2 OF 2
SEAN	NONE	B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION 'DE-CODER'	P24D40M
01A	07/13/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P24D40M

2



1