
## SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3 POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1



Product designation  Product type designati	on			Selector switch actuator key - 3 position LPCS39
General characteristics	5			
Colour				Black
Type of positions				Selector switch
Material				Polyamide
IEC degree of protecti	ion			IP66, IP67 and IP69K
Mechanical features				
Mechanical life			cycles	1000000
Mounting adapter				LPXAU120
Weight			g	60
UL technical data				
UL degree of protection				Type1, 2, 3R, 4, 4X, 12, 12K
Ambient conditions				
Temperature				
	Operating temperature			
		min	°C	-25
		max	°C	+70
	Storage temperature			
		min	°C	-40
		max	°C	+85
Dimoncione				

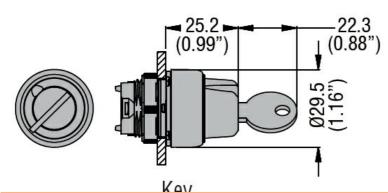

Certifications and	Lcomr	diance
	i COITIF	ліаньс

$\sim$	. 11	
Com	nııar	าดค

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-5-1

UL508

## Certificates

CCC

cULus





SELECTOR SWITCH ACTUATOR KEY Ø22MM PLATINUM SERIES CHROMED PLASTIC, 3
POSITION, 1 - 0 < 2 WITH DIFFERENT KEY CODE. WITHDRAL AT 1

ETIM classification

ETIM 8.0

EC000222 -Front element for selector switch