DELAYED AUXILIARY CONTACT 1NO+1NC (PNEUMATIC OPERATION) ON DE-ENERGISATION FOR FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF... SERIES CONTACTORS, 60S




Mechanical features

Fixing Front centre mounting


Auxiliary contact characteristics

Type of contact 1NO + 1NC

Dimensions

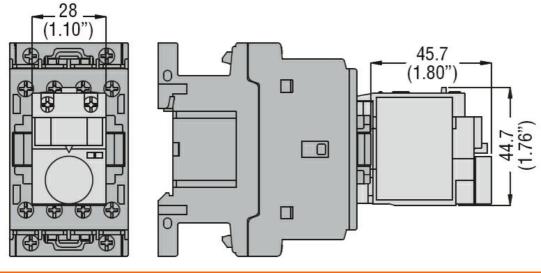

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC



11G48660

DELAYED AUXILIARY CONTACT 1NO+1NC (PNEUMATIC OPERATION) ON DE-ENERGISATION FOR FRONT CENTRE MOUNTING. SCREW TERMINALS, FOR BF... SERIES CONTACTORS, 60S

CSA	
cURus	
EAC	

ETIM classification

ETIM 8.0

EC002498 -Accessories/spare parts for lowvoltage switch technology