





ENERG


енергия · ενεργεια



Indoor unit E*ST30D-****D
Outdoor unit PUZ-SHWM140YAA

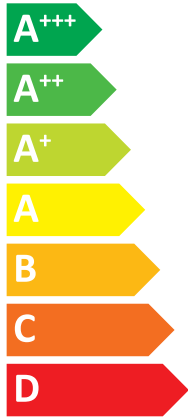

A++

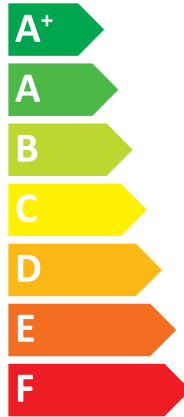

A

Two sound power level icons. The top one shows a house with a speaker icon and the text "41 dB". The bottom one shows a house with a speaker icon and the text "58 dB".



A legend for power capacity with three colored squares: dark blue for "14 kW", medium blue for "14 kW", and light blue for "14 kW".

2019

811/2013

DG79V341H36



PRODUCT FICHE

Mitsubishi Electric Erp Directive Related Product Information: erp.mitsubishielectric.eu/erp
Details and precautions on installation, maintenance and assembly can be found in the installation and/or operation manuals.
This information is based on EU regulation No 811/2013 and No 813/2013.

DG79A02MH01

Table 1: SPACE HEATER. Columns: Outdoor unit, Indoor unit, Medium-temperature application (3-25), Low-temperature application (4-25). Rows: Various models like PUZ-SWM60VAA, PUZ-SWM80VAA, etc.

Table 2: COMBINATION HEATER. Columns: Outdoor unit, Indoor unit, Medium-temperature application (3-25), Low-temperature application (4-25). Rows: Various models like PUZ-SWM60VAA, PUZ-SWM80VAA, etc.

English	German	French	Italian	Spanish
Nederlands	Svenska	Dansk	Portuguesa	Espanol
suomi	Castina	Български	Polski	Ελληνικά
Outdoor unit	Außengerät	unité extérieure	unità esterna	unidad exterior
1	Utlomsenhet	Utenlands enhed	unidad exterior	Εξωτερική μονάδα
Ulkoyksykko	Vonkomsenhet	Внешний тепло	jednostka zewnętrzna	Εξωτερική μονάδα
2	Indoor unit	unité intérieure	unità interna	unidad interior
sisäyksykko	Innenset	Indoor's enhed	interna interior	Εσωτερική μονάδα
3	Medium-temperature application	Mitteltemperaturanwendung	Je application de media temperatura	In application de media temperatura
keskilämpötilan sovellus	mittelmitteltemperaturlämpling	middletemperatuurtoepassing	a aplicação a media temperatura	η εφαρμογή σε μέση θερμοκρασία
4	Low-temperature application	Niedertemperaturanwendung	Je application a basse temperature	In application a basse temperatura
alagtemperatuurilto-sovellus	Niedertemperaturanwendung	Parallisuus a basse temperature	la aplicación a bassa temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
5	Overheated load profile	Aufgeheiztes Lastprofil	Profil de surchauffe décalée	Perfil de carga descalado
Syrjäveden savutusprofiili	Dekoratiedu lastensavuprofiili	Профиль работы при перегреве	Profil de carga descalado	Δημιψύχο προφίλ φορτίου
6	Seasonal space heating energy efficiency class	la classe de efficacité énergétique saisonnière	la classe de efficacité énergétique saisonnière	In classe de efficacité énergétique saisonnière
de seizoenruimteverwarming energie-efficiëntieklasse	de seizoenruimteverwarming energie-efficiëntieklasse	la classe de efficacité énergétique saisonnière	la classe de efficacité énergétique saisonnière	η τάξη ενεργειακής αποδοτικότητας της εποχιακής θέρμανσης χώρου
7	Water heating energy efficiency class	la classe de efficacité énergétique	la classe de efficacité énergétique	In classe de efficacité énergétique
de energie-efficiëntieklasse voor waterverwarming	de energie-efficiëntieklasse voor waterverwarming	la classe de efficacité énergétique	la classe de efficacité énergétique	η τάξη ενεργειακής αποδοτικότητας θέρμανσης χώρου
8	Rated heat output under average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	la puissance thermique nominale dans les conditions climatiques moyennes	In puissance thermique nominale (en conditions climatiques moyennes)
de nominale warmteafgifte (onder gemiddelde klimaatomstandigheden)	de nominale warmteafgifte (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la puissance thermique nominale (en conditions climatiques moyennes)	η ονομαστική θερμική ισχύς (στο μέσο κλιματικό περιβάλλον)
9	For space heating, annual energy consumption under average climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	In consommation annuelle de l'électricité (en conditions climatiques moyennes)
de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	η ενεργειακή απόδοση θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
10	For water heating, annual electricity consumption under average climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	In consommation annuelle de l'électricité (en conditions climatiques moyennes)
voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
11	de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la puissance thermique nominale dans les conditions climatiques moyennes	In puissance thermique nominale (en conditions climatiques moyennes)
de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques moyennes	la puissance thermique nominale dans les conditions climatiques moyennes	η ονομαστική θερμική ισχύς (στο μέσο κλιματικό περιβάλλον)
12	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	In consommation annuelle de l'électricité (en conditions climatiques moyennes)
de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques moyennes)	η ενεργειακή απόδοση θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
13	Sound power level L _{WA} indoor	le niveau de puissance acoustique L _{WA} à l'intérieur	le niveau de puissance acoustique L _{WA} à l'intérieur	In niveau de puissance acoustique L _{WA} en intérieur
het geluidsvormingsniveau L _{WA} binnen	het geluidsvormingsniveau L _{WA} binnen	le niveau de puissance acoustique L _{WA} à l'intérieur	le niveau de puissance acoustique L _{WA} à l'intérieur	η στάθμη ηχητικής ισχύος L _{WA} εσωτερικού χώρου
14	Werkten uitstekend in de dalen	fonctionner du bon heures seules	fonctionner du bon heures seules	In fonction normale durant les heures de faible demande
Werkten uitstekend in de dalen	Werkten uitstekend in de dalen	fonctionner du bon heures seules	fonctionner du bon heures seules	function normale durant les heures de faible demande
15	de nominale warmteafgifte, onder koude klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus froides	la puissance thermique nominale, dans les conditions climatiques plus froides	In puissance thermique nominale (en conditions climatiques plus froides)
de nominale warmteafgifte, onder koude klimaatomstandigheden	de nominale warmteafgifte, onder koude klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus froides	la puissance thermique nominale, dans les conditions climatiques plus froides	η ονομαστική θερμική ισχύς υπό ψυχρότερες κλιματικές συνθήκες
16	de nominale warmteafgifte, onder warme klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la puissance thermique nominale, dans les conditions climatiques plus chaudes	In puissance thermique nominale (en conditions climatiques plus chaudes)
de nominale warmteafgifte, onder warme klimaatomstandigheden	de nominale warmteafgifte, onder warme klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus chaudes	la puissance thermique nominale, dans les conditions climatiques plus chaudes	η ονομαστική θερμική ισχύς υπό θερμότερες κλιματικές συνθήκες
17	voor ruimteverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	pour l'usage de l'énergie – pour les conditions climatiques plus froides	pour l'usage de l'énergie – pour les conditions climatiques plus froides	In consommation annuelle d'électricité (en conditions climatiques plus froides)
voor ruimteverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	pour l'usage de l'énergie – pour les conditions climatiques plus froides	pour l'usage de l'énergie – pour les conditions climatiques plus froides	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
18	voor ruimteverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	pour l'usage de l'énergie – pour les conditions climatiques plus chaudes	pour l'usage de l'énergie – pour les conditions climatiques plus chaudes	In consommation annuelle d'électricité (en conditions climatiques plus chaudes)
voor ruimteverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	pour l'usage de l'énergie – pour les conditions climatiques plus chaudes	pour l'usage de l'énergie – pour les conditions climatiques plus chaudes	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
19	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	In consommation annuelle d'électricité (en conditions climatiques plus froides)
voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudere klimaatomstandigheden	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
20	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	In consommation annuelle d'électricité (en conditions climatiques plus chaudes)
voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warmere klimaatomstandigheden	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
21	de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder koudere klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques plus froides	la puissance thermique nominale dans les conditions climatiques plus froides	In puissance thermique nominale (en conditions climatiques plus froides)
de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder koudere klimaatomstandigheden)	de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder koudere klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques plus froides	la puissance thermique nominale dans les conditions climatiques plus froides	η ονομαστική θερμική ισχύς (στο μέσο κλιματικό περιβάλλον)
22	de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder warmere klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques plus chaudes	la puissance thermique nominale dans les conditions climatiques plus chaudes	In puissance thermique nominale (en conditions climatiques plus chaudes)
de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder warmere klimaatomstandigheden)	de seizoenruimteverwarming energie-efficiëntie voor ruimteverwarming (onder warmere klimaatomstandigheden)	la puissance thermique nominale dans les conditions climatiques plus chaudes	la puissance thermique nominale dans les conditions climatiques plus chaudes	η ονομαστική θερμική ισχύς (στο μέσο κλιματικό περιβάλλον)
23	de energie-efficiëntie voor waterverwarming (onder koudere klimaatomstandigheden)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques plus froides)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques plus froides)	In consommation annuelle de l'électricité (en conditions climatiques plus froides)
de energie-efficiëntie voor waterverwarming (onder koudere klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder koudere klimaatomstandigheden)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques plus froides)	pour le chauffage de l'eau, la consommation annuelle d'électricité (dans les conditions climatiques plus froides)	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
24	de energie-efficiëntie voor waterverwarming (onder warmere klimaatomstandigheden)	pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	In consommation annuelle de l'électricité (en conditions climatiques plus chaudes)
de energie-efficiëntie voor waterverwarming (onder warmere klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder warmere klimaatomstandigheden)	pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	η τήξη ενεργειακής αποδοτικότητας θέρμανσης χώρου (στο μέσο κλιματικό περιβάλλον)
25	Sound power level L _{WA} outdoor	le niveau de puissance acoustique L _{WA} à l'extérieur	le niveau de puissance acoustique L _{WA} à l'extérieur	In niveau de puissance acoustique L _{WA} en extérieur
het geluidsvormingsniveau L _{WA} buiten	het geluidsvormingsniveau L _{WA} buiten	le niveau de puissance acoustique L _{WA} à l'extérieur	le niveau de puissance acoustique L _{WA} à l'extérieur	η στάθμη ηχητικής ισχύος L _{WA} εξωτερικού χώρου
Αλληλοκόστος L _{WA} αέρος	Αλληλοκόστος L _{WA} αέρος	le niveau de puissance acoustique L _{WA} à l'extérieur	le niveau de puissance acoustique L _{WA} à l'extérieur	η στάθμη ηχητικής ισχύος L _{WA} εξωτερικού χώρου

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION


Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	12.4	kW	Tj = - 7 ° C	COPd	2.18	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 ° C	COPd	3.49	-
Tj = + 2 ° C	Pdh	7.5	kW	Tj = + 7 ° C	COPd	4.85	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	6.61	-
Tj = + 7 ° C	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.92	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.92	-
Tj = +12 ° C	Pdh	3.9	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable					2640	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	8055	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	114	%	
Daily electricity consumption	Q _{elec}	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details
 MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY
 Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier:

 Kenichi SAITO
 Manager, Quality Assurance Department
 TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	182	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	12.4	kW	Tj = - 7 ° C	COPd	3.00	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 ° C	COPd	4.59	-
Tj = + 2 ° C	Pdh	7.5	kW	Tj = + 7 ° C	COPd	6.00	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	7.19	-
Tj = + 7 ° C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.55	-
Tj = +12 ° C	Pdh	4.1	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control	variable		
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA
Annual energy consumption	Q _{HE}	6262	kWh
Rated air flow rate, outdoors			
-			
2640			
m ³ /h			

For heat pump combination heater:			
Declared load profile	XL		
Daily electricity consumption	Q _{elec}	7.320	kWh
Annual electricity consumption	AEC	1610	kWh
Water heating energy efficiency			
η_{wh}			
114			
%			

Contact details	
MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY	Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey
The identification and signature of the person empowered to bind the supplier;	Kenichi SAITO
The signature is signed in the average climate / medium-temperature section.	Manager, Quality Assurance Department
	TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	115	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	8.5	kW	Tj = - 7 ° C	COPd	2.63	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 ° C	COPd	3.49	-
Tj = + 2 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	4.40	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	6.92	-
Tj = + 7 ° C	Pdh	4.2	kW	Tj = bivalent temperature	COPd	1.53	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = +12 ° C	Pdh	4.2	kW	Tj = - 15 ° C (if TOL < - 20 ° C)	COPd	1.52	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	° C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	° C
Tj = operation limit temperature (***)	Pdh	10.7	kW	Supplementary heater			
Tj = - 15 ° C (if TOL < - 20 ° C)	Pdh	11.4	kW	Rated heat output (*)	Psup	3.3	kW
Bivalent temperature	Tbiv	-16	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	11674	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	104	%	
Daily electricity consumption	Q _{elec}	7.980	kWh				
Annual electricity consumption	AEC		kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	153	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	8.3	kW	Tj = - 7 ° C	COPd	3.65	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 ° C	COPd	4.59	-
Tj = + 2 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 ° C	COPd	8.80	-
Tj = + 7 ° C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	2.03	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.79	-
Tj = +12 ° C	Pdh	4.3	kW	Tj = - 15 ° C (if TOL < - 20 ° C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	° C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	° C
Tj = operation limit temperature (***)	Pdh	10.7	kW	Supplementary heater			
Tj = - 15 ° C (if TOL < - 20 ° C)	Pdh	11.4	kW	Rated heat output (*)	Psup	3.3	kW
Bivalent temperature	Tbiv	-16	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	8865	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	104	%	
Daily electricity consumption	Q _{elec}	7.980	kWh				
Annual electricity consumption	AEC	0	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 ° C	COPd	2.00	-
Tj = + 2 ° C	Pdh	14.0	kW	Tj = + 7 ° C	COPd	3.27	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 ° C	COPd	5.50	-
Tj = + 7 ° C	Pdh	8.8	kW	Tj = bivalent temperature	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.00	-
Tj = +12 ° C	Pdh	5.5	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.98	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	4757	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	6.520	kWh				
Annual electricity consumption	AEC		kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	222	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 ° C	COPd	3.24	-
Tj = + 2 ° C	Pdh	14.0	kW	Tj = + 7 ° C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 ° C	COPd	7.18	-
Tj = + 7 ° C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.24	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.24	-
Tj = +12 ° C	Pdh	5.1	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	3319	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	6.520	kWh				
Annual electricity consumption	AEC	0	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.
- (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	ERST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	142	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	12.4	kW	Tj = - 7 ° C	COPd	2.18	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 ° C	COPd	3.49	-
Tj = + 2 ° C	Pdh	7.5	kW	Tj = + 7 ° C	COPd	4.85	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	6.61	-
Tj = + 7 ° C	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.92	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.92	-
Tj = +12 ° C	Pdh	3.9	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	7974	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	114	%	
Daily electricity consumption	Q _{elec}	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details
 MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY
 Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier:

 Kenichi SAITO
 Manager, Quality Assurance Department
 TURKEY

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	ERST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	184	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	12.4	kW	Tj = - 7 ° C	COPd	3.00	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 ° C	COPd	4.59	-
Tj = + 2 ° C	Pdh	7.5	kW	Tj = + 7 ° C	COPd	6.00	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	7.19	-
Tj = + 7 ° C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.55	-
Tj = +12 ° C	Pdh	4.1	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	° C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	6181	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	114	%	
Daily electricity consumption	Q _{elec}	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	ERST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	116	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	8.5	kW	Tj = - 7 ° C	COPd	2.63	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 ° C	COPd	3.49	-
Tj = + 2 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	4.40	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	6.92	-
Tj = + 7 ° C	Pdh	4.2	kW	Tj = bivalent temperature	COPd	1.53	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = +12 ° C	Pdh	4.2	kW	Tj = - 15 ° C (if TOL < - 20 ° C)	COPd	1.52	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	° C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	° C
Tj = operation limit temperature (***)	Pdh	10.7	kW	Supplementary heater			
Tj = - 15 ° C (if TOL < - 20 ° C)	Pdh	11.4	kW	Rated heat output (*)	Psup	3.3	kW
Bivalent temperature	Tbiv	-16	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	11625	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	104	%
Daily electricity consumption	Q _{elec}	7.980	kWh				
Annual electricity consumption	AEC		kWh				

Contact details							
MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY				Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey			
The identification and signature of the person empowered to bind the supplier;							
Kenichi SAITO							
The signature is signed in the average climate / medium-temperature section.							
Manager, Quality Assurance Department							
TURKEY							

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	ERST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	8.3	kW	Tj = - 7 ° C	COPd	3.65	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 ° C	COPd	4.59	-
Tj = + 2 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 ° C	COPd	8.80	-
Tj = + 7 ° C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	2.03	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.79	-
Tj = +12 ° C	Pdh	4.3	kW	Tj = - 15 ° C (if TOL < - 20 ° C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	° C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	° C
Tj = operation limit temperature (***)	Pdh	10.7	kW	Supplementary heater			
Tj = - 15 ° C (if TOL < - 20 ° C)	Pdh	11.4	kW	Rated heat output (*)	Psup	3.3	kW
Bivalent temperature	Tbiv	-16	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	8816	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	104	%	
Daily electricity consumption	Q _{elec}	7.980	kWh				
Annual electricity consumption	AEC	0	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	ERST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	158	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 ° C	COPd	2.00	-
Tj = + 2 ° C	Pdh	14.0	kW	Tj = + 7 ° C	COPd	3.27	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 ° C	COPd	5.50	-
Tj = + 7 ° C	Pdh	8.8	kW	Tj = bivalent temperature	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.00	-
Tj = +12 ° C	Pdh	5.5	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.98	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	4659	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	6.520	kWh				
Annual electricity consumption	AEC		kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

- Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 - Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
- (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
- (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.
- (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	ERST30D-****D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	229	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 ° C	COPd	3.24	-
Tj = + 2 ° C	Pdh	14.0	kW	Tj = + 7 ° C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 ° C	COPd	7.18	-
Tj = + 7 ° C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.24	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.24	-
Tj = +12 ° C	Pdh	5.1	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	3222	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	6.520	kWh				
Annual electricity consumption	AEC	0	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION


Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	12.4	kW	Tj = - 7 ° C	COPd	2.18	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 ° C	COPd	3.49	-
Tj = + 2 ° C	Pdh	7.5	kW	Tj = + 7 ° C	COPd	4.85	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	6.61	-
Tj = + 7 ° C	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.92	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.92	-
Tj = +12 ° C	Pdh	3.9	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	8055	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	114	%	
Daily electricity consumption	Q _{elec}	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details
 MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY
 Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier:

 Kenichi SAITO
 Manager, Quality Assurance Department
 TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.
 · Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.
 (*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
 (**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.
 (***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	182	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	12.4	kW	Tj = - 7 ° C	COPd	3.00	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = + 2 ° C	COPd	4.59	-
Tj = + 2 ° C	Pdh	7.5	kW	Tj = + 7 ° C	COPd	6.00	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	7.19	-
Tj = + 7 ° C	Pdh	6.4	kW	Tj = bivalent temperature	COPd	2.55	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	2.55	-
Tj = +12 ° C	Pdh	4.1	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.96	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	-10	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-10	° C	Power consumption in modes other than active mode			
Off mode				P _{OFF}			
Thermostat-off mode				P _{TO}			
Standby mode				P _{SB}			
Crankcase heater mode				P _{CK}			

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	6262	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	114	%	
Daily electricity consumption	Q _{elec}	7.320	kWh				
Annual electricity consumption	AEC	1610	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvari No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	115	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	8.5	kW	Tj = - 7 ° C	COPd	2.63	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 ° C	COPd	3.49	-
Tj = + 2 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	4.40	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = +12 ° C	COPd	6.92	-
Tj = + 7 ° C	Pdh	4.2	kW	Tj = bivalent temperature	COPd	1.53	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.55	-
Tj = +12 ° C	Pdh	4.2	kW	Tj = - 15 ° C (if TOL < - 20 ° C)	COPd	1.52	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	° C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	° C
Tj = operation limit temperature (***)	Pdh	10.7	kW	Supplementary heater			
Tj = - 15 ° C (if TOL < - 20 ° C)	Pdh	11.4	kW	Rated heat output (*)	Psup	3.3	kW
Bivalent temperature	Tbiv	-16	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	11674	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	104	%	
Daily electricity consumption	Q _{elec}	7.980	kWh				
Annual electricity consumption	AEC		kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	153	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	8.3	kW	Tj = - 7 ° C	COPd	3.65	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = + 2 ° C	COPd	4.59	-
Tj = + 2 ° C	Pdh	5.2	kW	Tj = + 7 ° C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = +12 ° C	COPd	8.80	-
Tj = + 7 ° C	Pdh	4.6	kW	Tj = bivalent temperature	COPd	2.03	-
Degradation co-efficient (**)	Cdh	0.98	-	Tj = operation limit temperature (***)	COPd	1.79	-
Tj = +12 ° C	Pdh	4.3	kW	Tj = - 15 ° C (if TOL < - 20 ° C)	COPd	2.05	-
Degradation co-efficient (**)	Cdh	0.96	-	Operation limit temperature	TOL	-30	° C
Tj = bivalent temperature	Pdh	11.8	kW	Heating water operating limit temperature	WTOL	60	° C
Tj = operation limit temperature (***)	Pdh	10.7	kW	Supplementary heater			
Tj = - 15 ° C (if TOL < - 20 ° C)	Pdh	11.4	kW	Rated heat output (*)	Psup	3.3	kW
Bivalent temperature	Tbiv	-16	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	-22	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	8865	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	104	%	
Daily electricity consumption	Q _{elec}	7.980	kWh				
Annual electricity consumption	AEC	0	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	154	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 ° C	COPd	2.00	-
Tj = + 2 ° C	Pdh	14.0	kW	Tj = + 7 ° C	COPd	3.27	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 ° C	COPd	5.50	-
Tj = + 7 ° C	Pdh	8.8	kW	Tj = bivalent temperature	COPd	2.00	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	2.00	-
Tj = +12 ° C	Pdh	5.5	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.98	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	4757	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	6.520	kWh				
Annual electricity consumption	AEC		kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.

PRODUCT INFORMATION / TECHNICAL DOCUMENTATION

Model(s):	Outdoor unit:	PUZ-SHWM140YAA
	Indoor unit:	EHST30D-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	14.0	kW	Seasonal space heating energy efficiency	η_s	222	%
Declared capacity for heating for part load at indoor temperature 20 ° C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 ° C and outdoor temperature Tj			
Tj = - 7 ° C	Pdh	-	kW	Tj = - 7 ° C	COPd	-	-
Degradation co-efficient (**)	Cdh	-	-	Tj = + 2 ° C	COPd	3.24	-
Tj = + 2 ° C	Pdh	14.0	kW	Tj = + 7 ° C	COPd	5.15	-
Degradation co-efficient (**)	Cdh	1.00	-	Tj = +12 ° C	COPd	7.18	-
Tj = + 7 ° C	Pdh	9.0	kW	Tj = bivalent temperature	COPd	3.24	-
Degradation co-efficient (**)	Cdh	0.99	-	Tj = operation limit temperature (***)	COPd	3.24	-
Tj = +12 ° C	Pdh	5.1	kW	Operation limit temperature	TOL	-30	° C
Degradation co-efficient (**)	Cdh	0.97	-	Heating water operating limit temperature	WTOL	60	° C
Tj = bivalent temperature	Pdh	14.0	kW	Supplementary heater			
Tj = operation limit temperature (***)	Pdh	14.0	kW	Rated heat output (*)	Psup	0.0	kW
Bivalent temperature	Tbiv	2	° C	Type of energy input	Electrical		
Reference design conditions for space heating	Tdesignh	2	° C				
Power consumption in modes other than active mode							
Off mode	P _{OFF}	0.022	kW				
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control	variable			-	2640	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	/ 58	dBA				
Annual energy consumption	Q _{HE}	3319	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile	XL			η_{wh}	130	%	
Daily electricity consumption	Q _{elec}	6.520	kWh				
Annual electricity consumption	AEC	0	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CONDITIONING SYSTEMS MANUFACTURING TURKEY JOINT STOCK COMPANY Manisa OSB 4.Kisim Kecilikoyosb Mah. Ahmet Nazif Zorlu Bulvarı No:19 Yunusemre - Manisa, Turkey

The identification and signature of the person empowered to bind the supplier;

Kenichi SAITO

The signature is signed in the average climate / medium-temperature section. Manager, Quality Assurance Department

TURKEY

· Details and precautions on installation, maintenance and assembly can be found in the installation and or operation manuals.

· Details and precautions on recycling and/or disposal at end-of-life can be found in the installation and or operation manuals.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0.9.

(***) If the declared TOL is lower than the T designh of the considered climate then the outdoor dry bulb temperature Tj is equal to T designh.