


Part number

PN 1663 PI



Flush-mounting socket outlet, PLUSO LS-TYPE series, 2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V, inclined

Product description		Material properties	
Product type	Socket Flush-mounting	Colour	RAL 9005 black
Series	PN...PI, PLUSO LS-TYPE	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	2 poles + 	China RoHs - EFUP	50
Clock position	6	REACH SVHC substances	Yes Lead
Size	Fixing centre distance socket 52 x 60 mm	SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Specification	Inclined	Approvals / Standards	
Technical data		Reference standard	EN 60309-1 and -2
Current	16 A	General ordering information	
Voltage	200 ÷ 250 V	EAN13 code	8015747079686
IP degree of protection	IP44	Packaging Information	
Further technical details		Packaging length	280,00 mm
Weight	117,00 g	Packaging height	196,00 mm
Operating temperature range (min, max)	-25°C ... +40°C	Packaging width	280,00 mm
		Packaging weight	2,50 kg
		Packaging volume	15,37 dm ³
		Packaging description	Carton box
		Packaging quantity	20 Pcs
		Packaging EAN code	8015747079792


Part number

PN 1663 PI



Catalogue drawings

(16A) PN ... PI

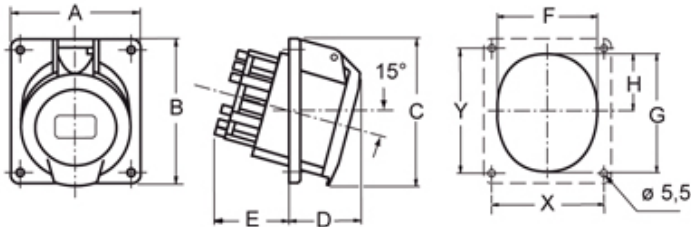

PN ... PI	A	B	C	D	E	F	G	H	X	Y
16A 2P+⊕	64	82	82	38	46	52	62	30	52	60
3P+⊕	64	82	82	42	47	57	65	28	52	60
3P+N+⊕	92	100	100	43	47	66	78	37,5	77	85

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Enclosure and spring lid colour RAL 9005 black
- Compliant with EN 60309-1 and -2
- Enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Flange with anti-ageing gasket
- PN...PI - PN...PQ types (IP44), spring lid
- Terminals with retained screws
- IP44 degree of protection (EN 60529)