
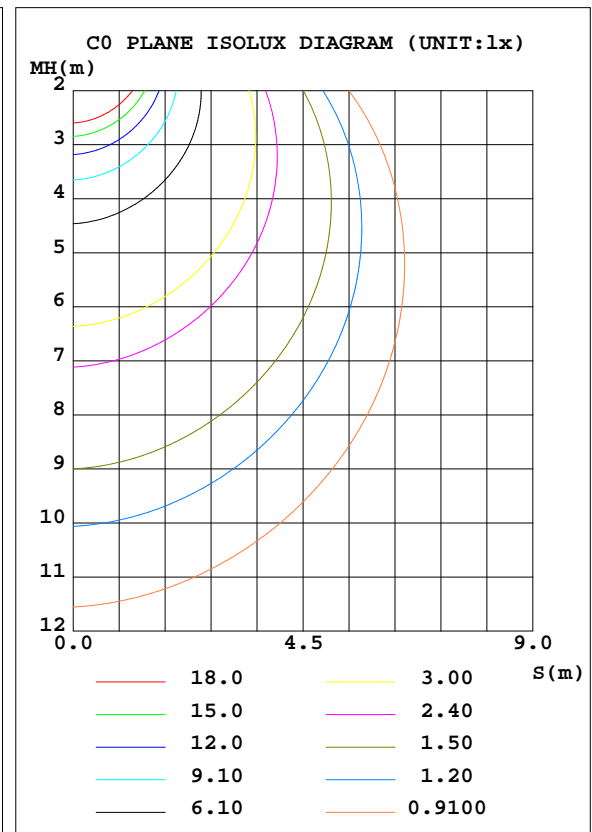


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.97V I:0.0645A P:8.0609W PF:0.5431 Freq:50.00Hz Lamp Flux:860.909x1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: A60_s_9aSA-A806ST-Q1	DIM.:	SERIAL No.: A2017023B001
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 106.80 lm/W			
MODEL		I _{max} (cd)	123.7	S/MH(C0/180)	1.50
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.41
RATED VOLTAGE(V)		TOTAL FLUX(lm)	860.91	η UP, DN(C0-180)	15.4, 36.2
NOMINAL FLUX(lm)	860.909	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	13.8, 34.6
LAMPS INSIDE	1	η up(%)	29.2	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)		η down(%)	70.8	CIBSE SHR MAX	1.55

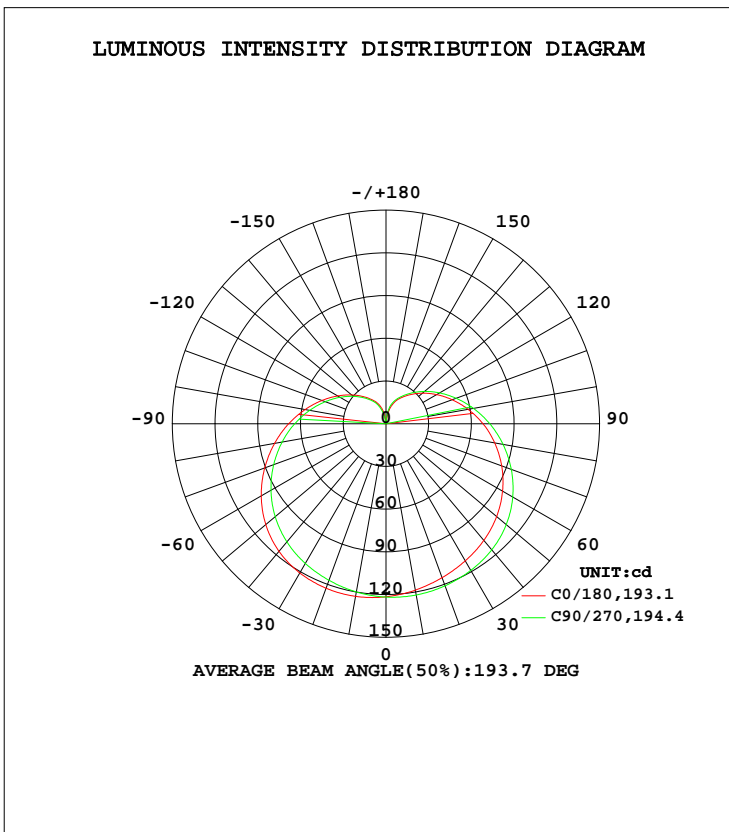

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:24.7DEG
 Operators:LSC
 Test Date:2020-09-22

γ Range: 0 - 180DEG
 γ Interval: 0.5DEG
 Test System:EVERFINE GO-R5000_V2 SYSTEM V2.00.429
 Humidity:48%
 Test Distance:1.533m [K=1.0000]
 Remarks:

Checker:

Assessor: LiHua