

Operating Guide

VF3 DN 200-300















MAINTENANCE FREE















AME 685






















© Danfoss | 2016.12 VI.LH.K4.00 | 1







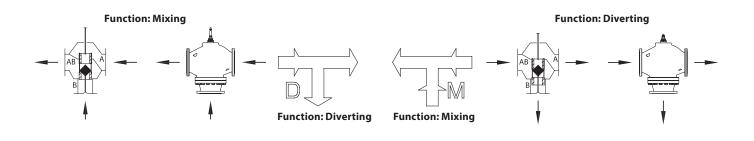

DN	L	Н	Н,	H ₂	H ₃	k	d2			
DN	n mm							n	min. 200	
200	600	389	259	1006	746	295	23	12		
250	730	440	1080	1018	758	355	26	12		
300	850	490	1093	1051	791	410	28	12	1877 6000	
										min. 200
٧		d2		15°		n I	> -		H H L	H H
	V D 096 (10)						•			L

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed.

All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.

AME 855 +

VF3 (DN 200-300)

VF3 (DN 200-300)

AME 685 +

VF3 (DN 200-300)