


Part number

CTM 24 R

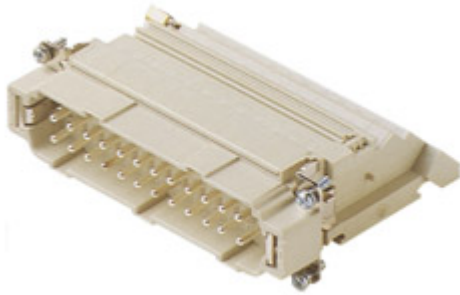

Male insert, CT series, screw terminal connection, 24 poles + PE, 16 A 230/400 V 4 kV 2, size "104.27", with incorporated terminal block, right side mounting







Product description		Material properties	
Product type	Insert	Main material	Polycarbonate (PC)
Series	CT	Other materials	Contacts: copper alloy
Connection type	Screw terminal connection	Colour	RAL 7032 grey
Gender	Male		Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	24 poles +	RoHs conformity	
Size	Size 104.27	China RoHs - EFUP	50
Specification	Right side mounting With incorporated terminal block	REACH SVHC substances	Yes Lead
Technical data		SCIP number	1a9c93ff-0445-4a16-81e3-1609ac5274d6
Current	16 A	Approvals / Standards	
Voltage	230 - 400 V	Reference standard	EN 61984:2009-06
Rated impulse withstand voltage	4 kV	Certifications	CSA, CQC, DNV, BV, EAC
Pollution degree	2	UL	ECBT2
Rated voltage according to UL/CSA	600 V	General ordering information	
Wire cross-section	0,75 mm ² - 2,50 mm ²	EAN13 code	8015747041348
AWG size	18 - 14	eCl@ss 8.1	27440205
Contact type	Turned silver plated	ETIM 7.0	EC000438
IP degree of protection	IP20 without enclosure, IP66/IP69 with enclosure	Packaging Information	
Further technical details		Packaging weight	1,03 kg
Characteristics according to EN 61984	10A 230/400V 4kV 3; 10A 400V 4kV 2	Packaging description	Carton box
Mating cycles	≥ 500	Packaging quantity	4 Pcs
Insulation resistance	≥ 10 GΩ	Packaging EAN code	8015747041355
Contact resistance	≤ 4 mΩ	Sub-packaging length	145,00 mm
Weight	243,00 g	Sub-packaging height	89,00 mm
Operating temperature range (min, max)	-40 °C ... +125 °C	Sub-packaging width	120,00 mm
Conductors stripping length	12 mm	Sub-packaging weight	0,26 kg
UL 94 flammability rating	V-0	Sub-packaging volume	1,55 dm ³
Torque for main contact	M2,6: 0,4 Nm; 3,5 lb.in (0,5 x 3 mm)	Sub-packaging description	Plastic packaging
Tightening torque for PE connection	M4: 1,2 Nm, 10,6 lb.in (Ph2 or 1,0x5,5mm)	Sub-packaging quantity	1 Pcs
Tightening torque for fixing screws	M3: 0.5 Nm; 4.4 lb.in (Ph1 or 0.8x4 mm)	Sub-packaging EAN barcode	8015747041362

Part number

CTM 24 R



Catalogue drawings



Notes

CTF/M 24 L/R inserts

- characteristics according to EN 61984:
16A 400V 4kV 2
- can be mated with CNE, CCE, CCS, CSE, CSH inserts
- inserts may be fitted both from the front or the rear of enclosure
- insulation resistance: > 10 GOhm
- ambient temperature limit: -40 °C ... +125 °C
- are made of self-extinguishing thermoplastic resin UL 94 V0
- mechanical life: > 500 cycles
- contact resistance: < 4 mOhm
- conductors stripping length: 12 mm
- terminal screw torque: 0.4 Nm
- enclosures (only bulkhead mounted housing): size 104.27:

C-TYPE IP65/IP66

C7 IP67 stainless steel lever

V-TYPE IP65/IP66 stainless steel lever

T-TYPE IP65 insulating

JEI zinc-plated steel lever


BIG hoods

W-TYPE aggressive environments

EMC

Dimensions shown in mm are not binding and may be changed without notice.

CT ... : for non-prepared conductors

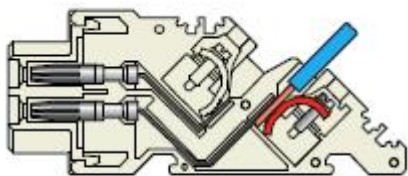

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
