
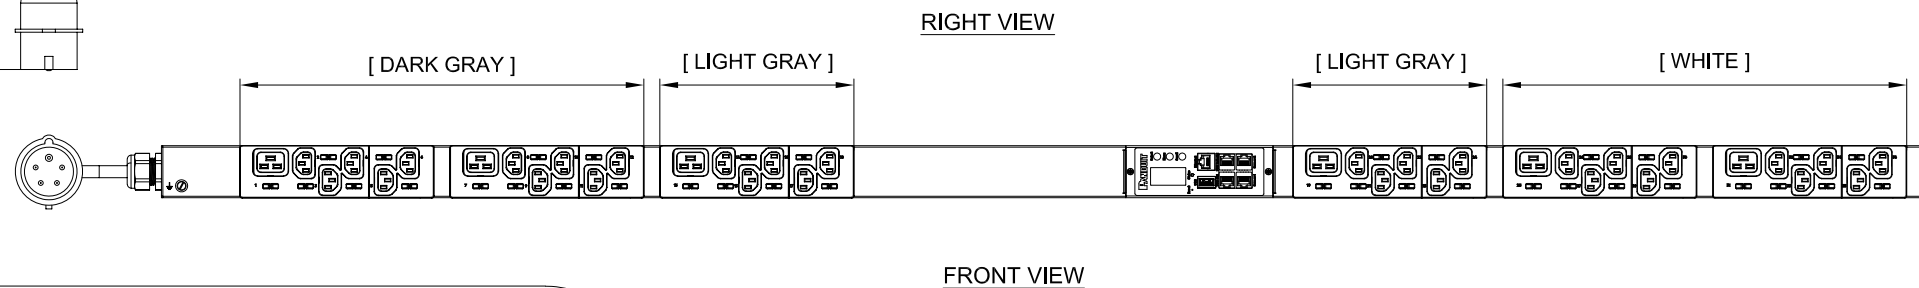
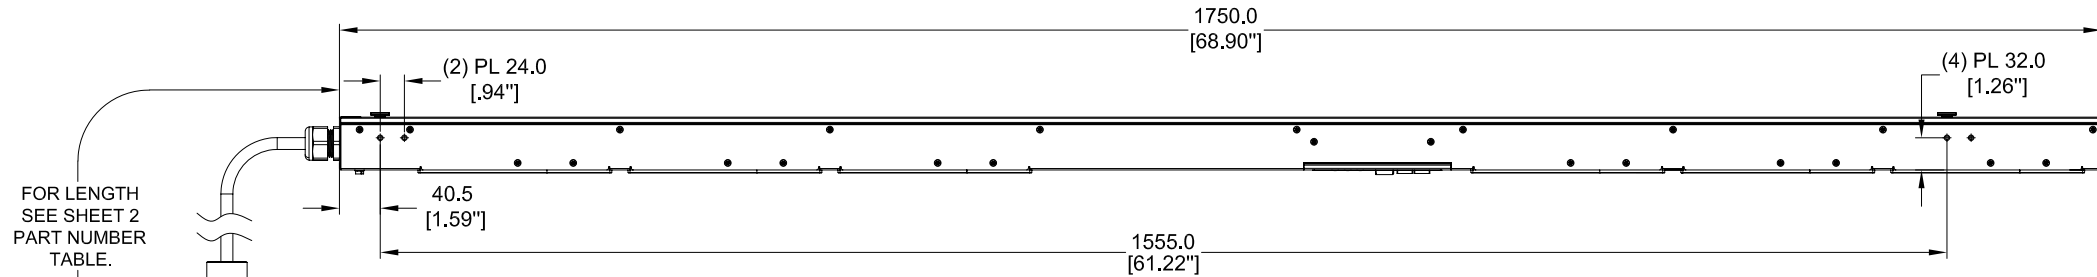
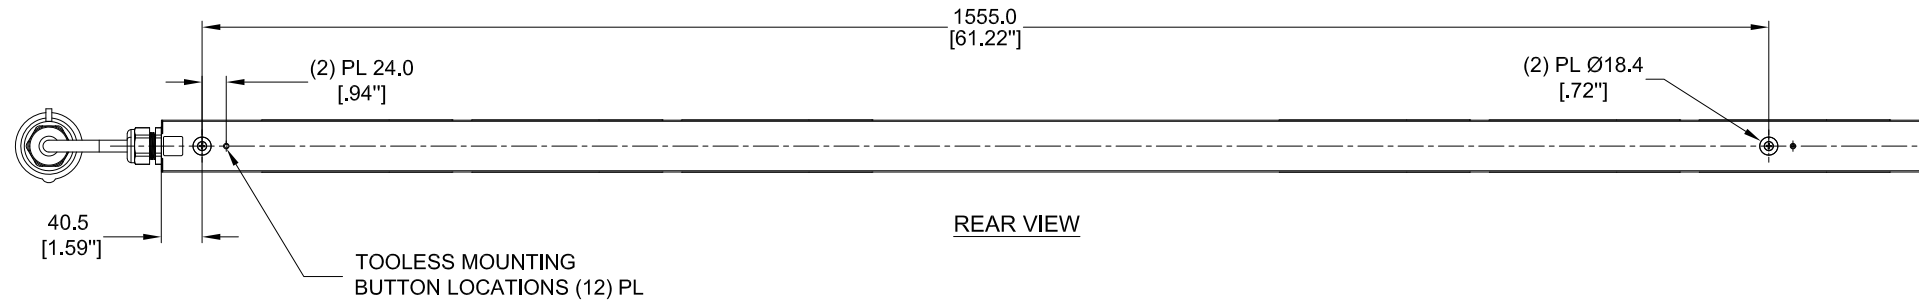


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| | |
|-------------|-------------|
| PANDUIT P/N | WEIGHT |
| P36F12M-XYZ | SEE SHEET 2 |

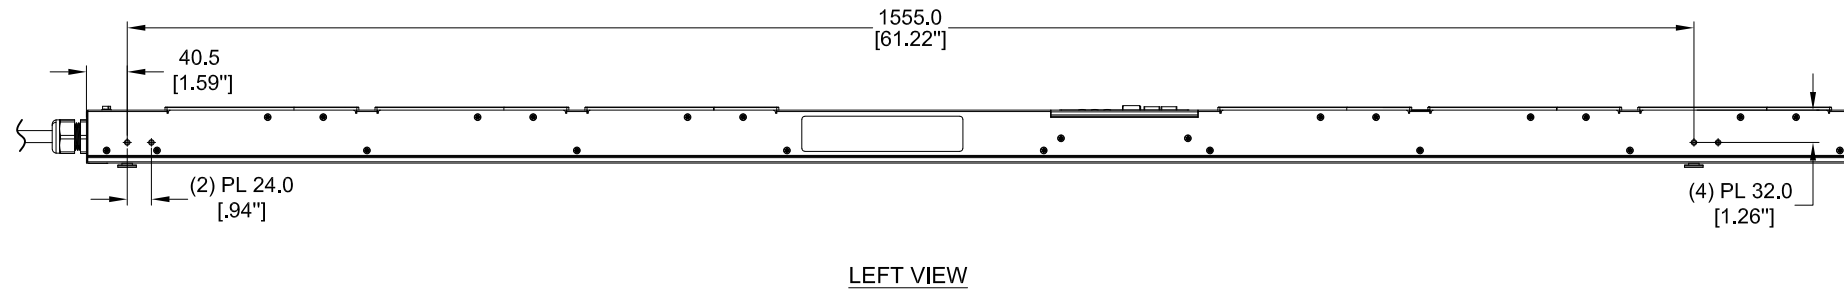

SPECIFICATION:


- 1. STANDARD:
 - UNIT TYPE: MONITORED OUTLET
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (30)C13, (6) C19
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 16A
 - BREAKER QTY & TYPE: N/A
 - INPUT PHASE: THREE-PHASE, WYE
 - RATED POWER: 11.0 kVA
 - INPUT PLUG: IEC 60309 3P+N+E 6H 16A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- 2. ADDITIONAL: NONE
- 3. ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- 1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
- 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- 4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- 5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P36F12M-XX Y Z**

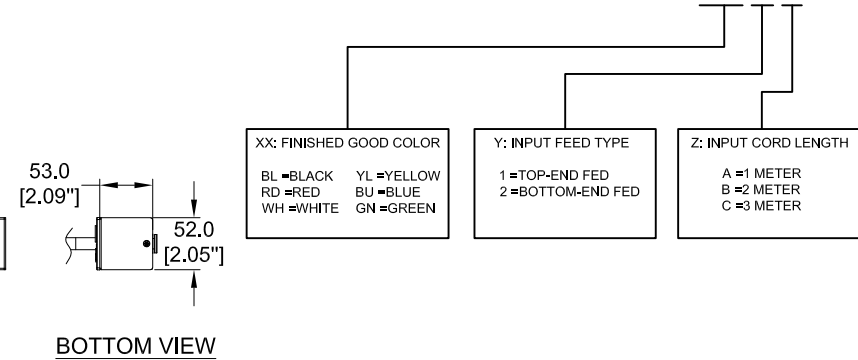

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
16A, 346-415V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------------|--------|-----|------|--|---------|
| 02A | 06/07/2018 | JF.YU | MIM | JAWI | ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO I NCLUDE CONFIGURABLE OPTION 'DE-CODER' | P36F12M |
| 01A | 09/11/2017 | GEORGE | MIM | EDM | INITIAL RELEASE | P36F12M |

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

TITLE
INTELLIGENT SERIES PDU
P36F12M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME:

DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

| | |
|---------------|------|
| Tolerance(mm) | |
| 0<L<50 | ±0.5 |
| 50<L<250 | ±1.0 |
| 250<L<500 | ±1.5 |
| 500<L<1000 | ±2.5 |
| 1000<L<2000 | ±4.0 |

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P36F12M_DC

DRAWN BY DATE: GEORGE 09/11/2017
CHK SCALE: SEAN NONE

SHT 1 OF 2 **SCALE B**

2

1

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

| FINISHED GOOD PART NUMBER | FINISHED GOOD DESCRIPTION | COLOR | INPUT CORD LENGTH | WEIGHT |
|---------------------------|--|-------------------|---------------------------------|--------|
| P36F12M | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-BL1A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-BL1B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-RD1A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED | RED (RAL 3020) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-RD1B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED | RED (RAL 3020) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-RD1C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED | RED (RAL 3020) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-WH1A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-WH1B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-WH1C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-YL1A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-YL1B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-YL1C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-BU1A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-BU1B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-BU1C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-GN1A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-GN1B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-GN1C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-BL2A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-BL2B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-BL2C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK | BLACK (RAL 9005) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-RD2A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED | RED (RAL 3020) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-RD2B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED | RED (RAL 3020) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-RD2C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED | RED (RAL 3020) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-WH2A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-WH2B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-WH2C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE | WHITE (RAL 9003) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-YL2A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-YL2B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-YL2C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW | YELLOW (RAL 1023) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-BU2A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-BU2B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-BU2C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE | BLUE (RAL 5005) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |
| P36F12M-GN2A | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 1M(+178MM-89MM) 3.3'[+7"/-3.5"] | 7.4kg |
| P36F12M-GN2B | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 2M(+178MM-89MM) 6.5'[+7"/-3.5"] | 7.6kg |
| P36F12M-GN2C | VERTICAL,(30) C13,(6) C19,MONITORED OUTLET,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN | GREEN (RAL 6001) | 3M(+254MM-127MM) 10'[+10"/-5"] | 7.8kg |

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN _____
DATE _____
PRINT _____

TITLE
INTELLIGENT SERIES PDU
P36F12M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME:
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P36F12M_DC

DRAWN BY: GEORGE DATE: 09/11/2017 CHK: SEAN SCALE: NONE

SHT 2 OF 2 SCALE: B

| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN |
|-----|------------|--------|-----|------|---|---------|
| 02A | 06/07/2018 | JF.YU | MIM | JAWI | ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO I NCLUDE CONFIGURABLE OPTION 'DE-CODER' | P36F12M |
| 01A | 09/11/2017 | GEORGE | MIM | EDM | INITIAL RELEASE | P36F12M |