



Pilot light head
LPFL

Product designation
Product type designation

General characteristics

| | |
|--------------------------|--|
| Colour | Blue |
| Type of positions | Pilot light head |
| Material | Aluminium and zinc alloy for the metal part, polyamide for plastic parts |
| IEC degree of protection | IP66, IP67 and IP69K |

Mechanical features

| | |
|------------------|--------------------------|
| Fixing | Without mounting adapter |
| Mounting adapter | LPXAU120M |


UL technical data

| | |
|-------------------------|------------------------------|
| UL degree of protection | Type1, 2, 3R, 4, 4X, 12, 12K |
|-------------------------|------------------------------|

Ambient conditions

| | | | | |
|-------------|-----------------------|-----|----|-----|
| Temperature | Operating temperature | min | °C | -25 |
| | | max | °C | +70 |
| | Storage temperature | min | °C | -40 |
| | | max | °C | +85 |

Dimensions

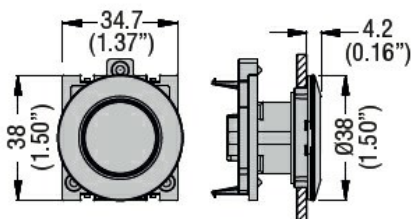

Certifications and compliance

| | |
|------------|---------------------|
| Compliance | CSA C22.2 n° 14 |
| | IEC/EN/BS 60947-1 |
| | IEC/EN/BS 60947-5-1 |
| | UL508 |

Certificates

cULus

ETIM classification

ETIM 8.0

EC002024 -
Accessories/spare
parts for
command
devices