


2

1

PANDUIT P/N	WEIGHT
MA001	0.1kg

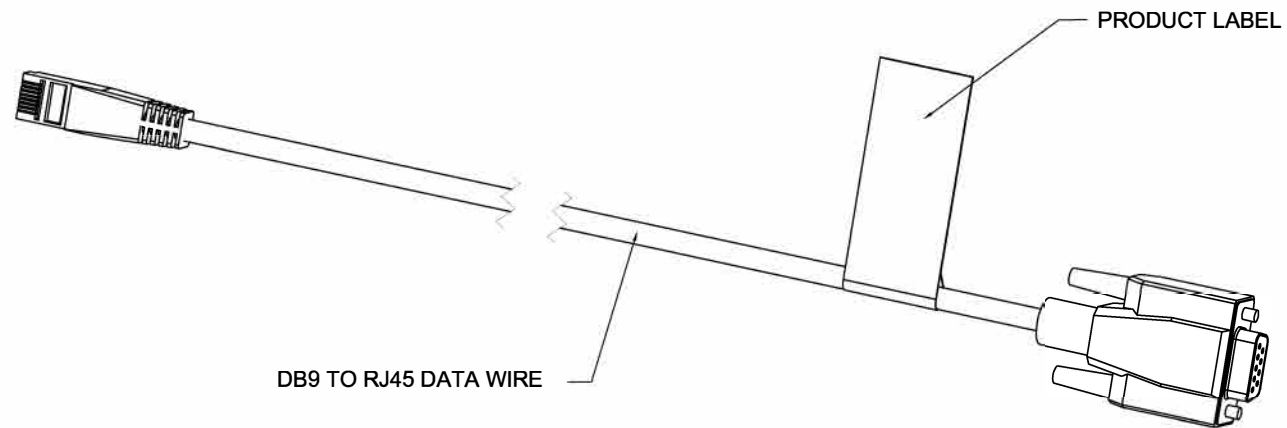

SPECIFICATION:


1. STANDARD:
- TEMPERATURE RANGE, OPERATIONAL: -5 - 60°C [23 - 140°F]
 - TEMPERATURE RANGE, STORAGE: -25 - 65°C [-13 - 149°F]
 - HUMIDITY RANGE, OPERATING: 5 - 95% RH, NON CONDENSING
 - HUMIDITY RANGE, STORAGE: 5 - 95% RH, NON CONDENSING
 - OPERATIONAL VOLTAGE: 5±0.1VAC, NOMINAL
 - INTERFACE PLUG: RJ45 AND DB9 FEMALE
 - INTERFACE PLUG COLOR: BLACK
 - CABLE TYPE: CAT.5E PATCH CABLE, 26AWG
 - CABLE COLOR: BLACK
2. ADDITIONAL: NONE
3. ACCESSORIES: NONE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ONLINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL

IDENTIFICATION:

PART NUMBER	DESCRIPTION
MA001	SERIAL CABLE CONNECTOR

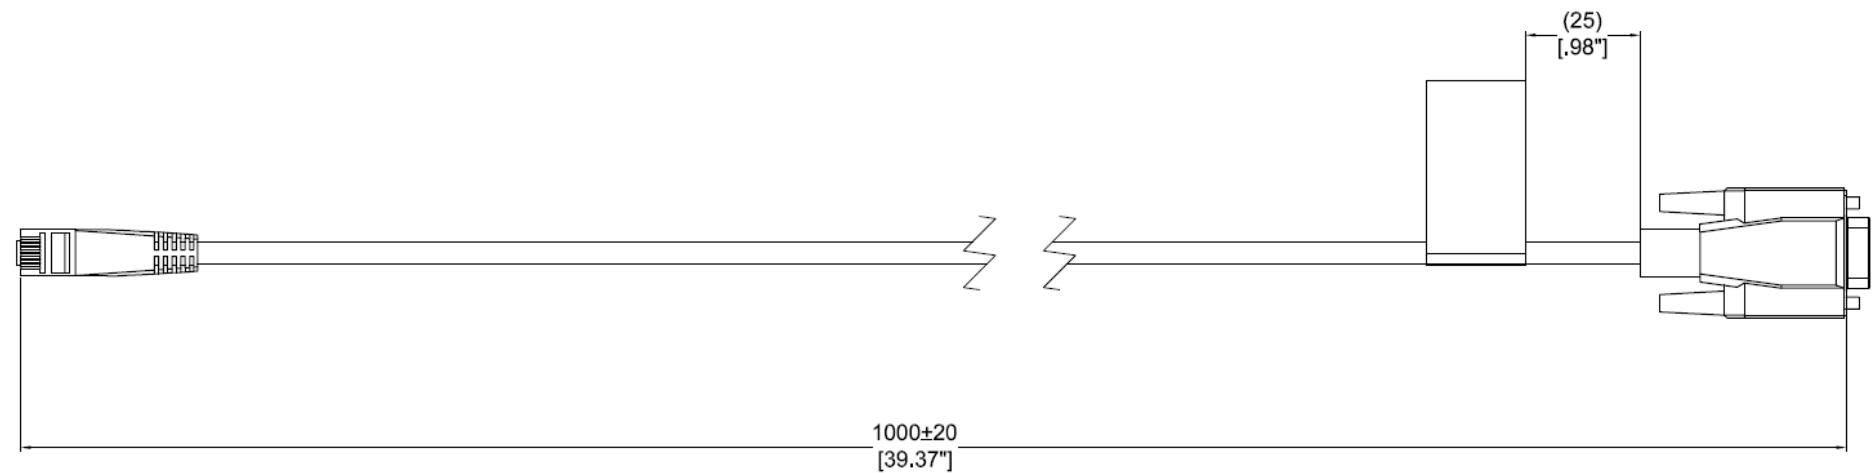

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____

DATE _____

PRINT _____

TITLE: SMARTZONE G5 SERIAL COMMUNICATION CABLE
CUSTOMER DRAWING

ITEM REVISION NAME: _____

DATASHEET FILE NAME: _____

PANDUIT

UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]

Wire Harness Tolerance(mm)

0<L<500 ±10

500<L<2000 ±20

2000<L<6000 ±50

MATERIAL/COLOR: N/A

DRAWING NUMBER: MA001_DC

THIRD ANGLE PROJECTION

DRAWN BY: Felix DATE: 01/04/2018 CHK: MM SCALE: NONE

SHT 1 OF 1

SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	01/04/2018	Felix	MM	DJB	INITIAL RELEASE	MA001