





Number of poles	Nr.	3
Operating voltage type		AC
Contact characteristics		
IEC Conventional free air thermal current I _{th}	A	40
Rated short time current (1s) I _{cw} (rms)	kA	0.8
Mechanical features		
Tightening torque for terminals	min	Nm 1.8
	max	Nm 2
	min	I _{bin} 16
	max	I _{bin} 18

UL technical data		
UL Standard		UL98

Dimensions

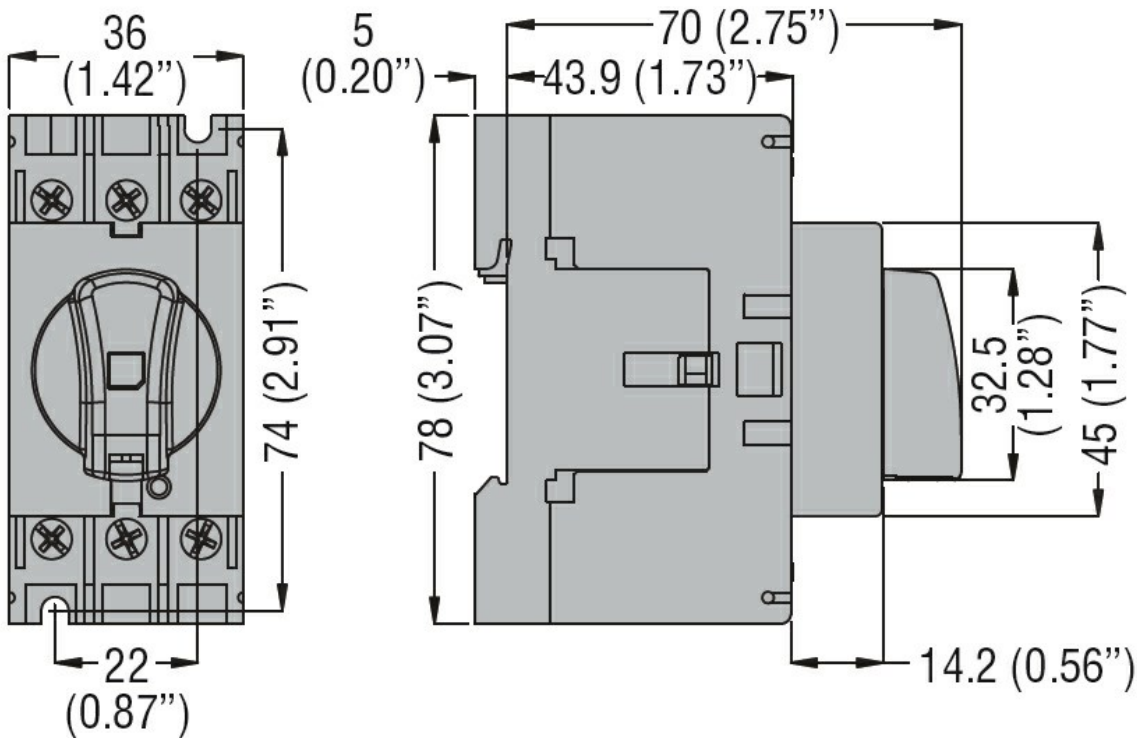

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n°60947-4-1

IEC/EN 60947-1

IEC/EN 60947-3

UL60947-4-1

Certifications

CCC

CSA C22.2 n°60947-4-1

cULus according to UL60947-4-1

EAC

KEMA

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnector