


2

1


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NO.	WEIGHT
MDC79	600 lb (272 kg)

- INCLUDED WITH SYSTEM:
 - SPLIT SIDE PANELS.
 - NETWORK CABLING AND CONNECTIVITY.
 - (15) 28GA CABLES TO CONNECT SERVER, SWITCHES, STORAGE AND OOB MANAGEMENT. BLUE AND INTERNATIONAL GRAY PROVIDED.
 - CJS6X88TGY CAT 6A SHIELDED JACKS.
 - TOOLLESS AND PERFORATED BLANKING PANELS.
 - FCE1UA - FIBER MANAGEMENT TRAY.
 - CPPL24WBLY - 24 PORT PATCH PANEL.
 - CABLE MANAGEMENT.
 - CMPHF1 HORIZONTAL D-RINGS.
 - VERTICAL CABLE MANAGEMENT FINGERS.
 - CABINET GROUNDING.
 - RGRB19CN - UNIVERSAL 20 PORT GROUND BAR.
 - RGCBNJ660P22 - CBN GROUNDING KIT.
 - RGEJ1024URT (2) - EQUIPMENT JUMPERS.
 - ACCESSORIES.
 - HOOK AND LOOP.
 - 12-24 BONDING AND STANDARD CAGE NUTS.
 - ESD PORTS AND WRIST STRAPS.
 - CASTERS.
 - SHIPPED ON A PALLET.
- FULLY BONDED STRUCTURE WHEN ASSEMBLED PER INSTRUCTIONS.
- STATIC LOAD RATING: 2500LB (1134 kg).
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR PARTS APPLICABLE FOR USE WITH THIS PRODUCT.

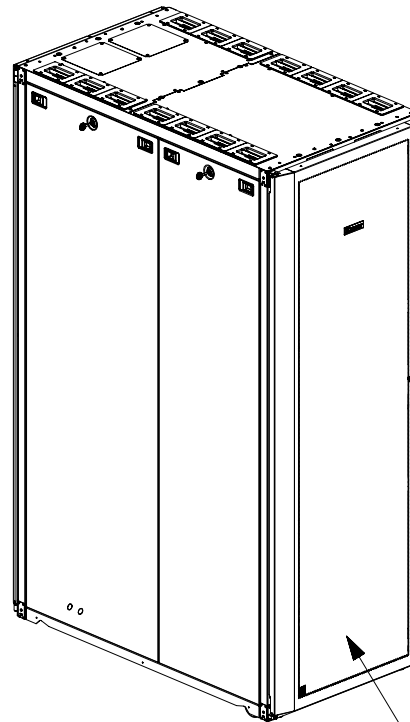

PERFORATED FRONT SINGLE HINGE DOOR

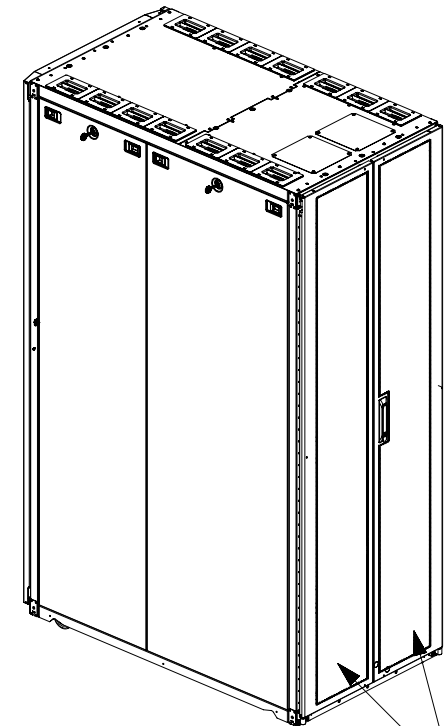

PERFORATED REAR SPLIT DOORS

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE	ITEM REVISION NAME	DATASET FILE NAME	MATERIAL:	DRAWING NUMBER:	SIZE
							MDC79 - CUSTOMER DRAWING					
							CONTROL DRAWING	15V524AC/00	15V524AC_DC_00A.PRT	N/A		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)	.xxx ± .005 (.127)				
							.x ± .1 (2.54)	ANGLES ± 5 °				
							.xx ± .01 (.25)					
00A	6/8/16	MW	MBVE		RELEASED TO PRODUCTION	15V522AC_00	THIRD ANGLE PROJECTION				15V524AC	A
											SHT 1 OF 1	

2

1