

NOTES:

1. SYSTEM INCLUDES:

- (2) PULS 91.2W 24 VOLT DC POWER SUPPLIES
- (1) PULS 24 VOLT DC UPS
- (1) PULS 24 VOLT DC BACK UP BATTERY
- (2) STAHL 10 AMP LOCKOUT CONTACT BLOCKS
- (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER
- (1) PANDUIT 6-PORT GROUND BAR


2. POWER CIRCUIT DESIGNED FOR ONE OR TWO 24 VOLT DC SWITCHES NOT TO EXCEED 42 WATTS PER SWITCH

3. ALL ACTIVE COMPONENTS RATED FOR USE CLASS 1, DIVISION 2 ENVIRONMENTS

4. ALL ZONE SYSTEMS COMPLY WITH UL 508A STANDARDS

5. ALL ZONE SYSTEMS REQUIRE A 100-240 VOLT AC SINGLE-PHASE FEED

6. INTERNAL WIRING NOT SHOWN, SEE DRAWING (15V510WA) FOR COMPLETE SCHEMATIC

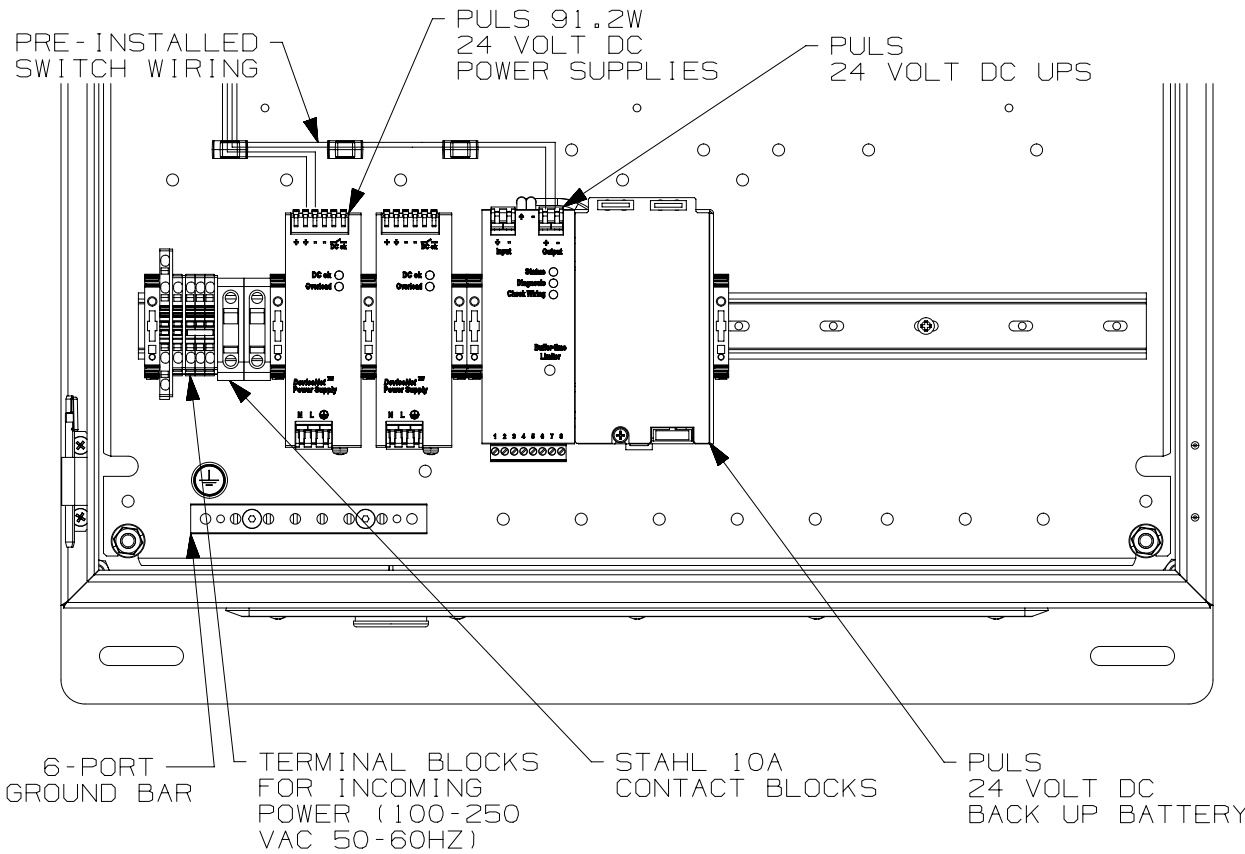

						TITLE UNIVERSAL NETWORK ZONE SYSTEM, 100-240VAC INPUT, REDUNDANT 91.2W 24VDC POWER SUPPLIES, BATTERY UPS CUSTOMER DRAWING	
						ITEM REVISION NAME 15V510CJ/01	
						DATASET FILE NAME 15V510CJ_DC/01A	
						UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: INCHES +/- 0.03 METRIC - MILLIMETER +/- 0.8 X.X +/- 0.018 X.X +/- 0.46 ANGLE X.XX +/- 0.007 X.XX +/- 0.18 +/- 1°	
						MATERIAL: N/A	
						DRAWING NUMBER: 15V510CJ	
01A	2/21/18	JBO	NWW	TIMH	RELEASED TO CUSTOMER	15V510CJ	THIRD ANGLE PROJECTION
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY: NWW DATE: 2/24/16 CHK: TIMH SCALE: 1:4
						SHT 1 OF 1 SIZE: A	

00/00000000