




| | | | |
|---|------------------------|---------------------|-----|
| Product designation | Key operated | | |
| Product type designation | KCN | | |
| General characteristics | | | |
| General characteristics | | | |
| Housing Material | Polymer thermoplastic | | |
| Key shape | Angled | | |
| Contact characteristics | | | |
| Type of contact | 2NC Slow action | | |
| Thermal current I _{th} | A | 10 | |
| IEC/EN 60947-5-1 designation | A600 Q600 | | |
| Rated insulation voltage U _i | V | 690 | |
| Rated impulse withstand voltage U _{imp} | kV | 6 | |
| Insulation class | II | | |
| Short-circuit protection with fuse | Class/A | 10 gG/SC QUICK FUSE | |
| Switching speed | min | m/s | 0.5 |
| | max | m/s | 1.5 |
| IEC Conventional free air thermal current I _{th} | A | 10 | |
| Resistance per pole (average value) | mΩ | <10 | |
| Operations | | | |
| Mechanical life | cycles | 100000 | |
| B10d | cycles | 100000 | |
| Mechanical operation | cycles/h | 3600 | |
| Output characteristics | | | |
| Mechanical life | cycles | 100000 | |
| Mechanical features | | | |
| Operating head fixing | Locking bayonet insert | | |
| Operating torque | N | 8 | |
| | l _b | 1.8 | |
| Tightening torque (Max) | | | |
| Switch fixing | Nm | 2.5 | |
| | l _{bin} | 22.1 | |
| Contact terminals | Nm | 0.8 | |
| | l _{bin} | 7 | |
| Body lid screw fixing | Nm | 0.8 | |
| | l _{bin} | 7 | |
| Conductor section | AWG/Kcmil | | |

LIMIT SWITCH, K SERIES, KEY OPERATED, 2 SIDE CABLE ENTRY. DIMENSIONS
COMPATIBLE TO EN 50047, PLASTIC BODY, CONTACTS 2NC SLOW ACTION. ANGLED KEY


| | | | |
|---------------------------|-------------------------------|-----------------|--------|
| | min | 16 | |
| | max | 14 | |
| IEC | | | |
| | min | mm ² | 1 or 2 |
| | max | mm ² | 2.5 |
| Cable connection | Self-releasing screw terminal | | |
| Cable entry | M20 on the sides | | |
| Weight | g | 107 | |
| Ambient conditions | | | |
| Pollution degree | 3 | | |
| Temperature | | | |
| Operating temperature | | | |
| | min | °C | -25 |
| | max | °C | +70 |
| Storage temperature | | | |
| | min | °C | -40 |
| | max | °C | +70 |

Dimensions

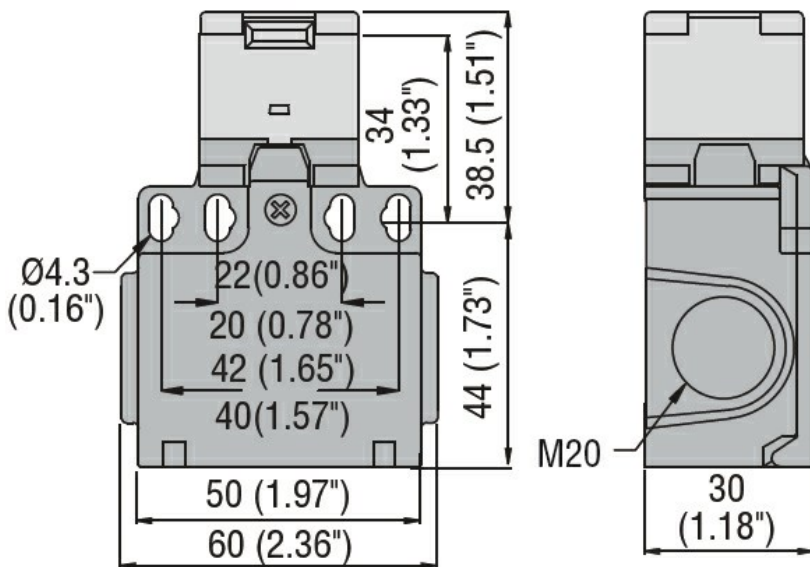

Wiring diagrams

Slow action

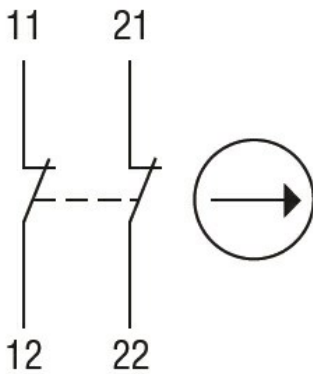

2NC

Certifications and compliance

Compliance

CSA C22.2 n° 14
EN 50047
IEC/EN 60204-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000030 - End switch