

Part number

CX 02 BM



Male modular insert, Mixo Bus series, coaxial, 2 modules, 50 V 0,8 kV 3, seat for 2 shielded connectors

| Product description | | Material properties | |
|---|--|-------------------------------------|----------------------|
| Product type | Modular insert | Main material | Polycarbonate |
| Series | 06ABS | Colour | RAL 7032 grey |
| Connection type | Coaxial | RoHs conformity | Compliant |
| Gender | Male | China RoHs - EFUP | E |
| Size | 2 modules | REACH SVHC substances | No |
| Specification | Seat for 2 shielded connectors | Approvals / Standards | |
| Technical data | | Reference standard | EN 61984:2009-06 |
| Voltage | 50 V | Certifications | CSA, CQC, DNV, EAC |
| Rated impulse withstand voltage | 0,8 kV | UL | ECBT2 |
| Pollution degree | 3 | cUL | ECBT8 |
| Rated voltage according to UL/CSA | 50 V | General ordering information | |
| IP degree of protection | IP20 without enclosure, IP65/IP66/IP68/IP69 with enclosure | EAN13 code | 8015747095938 |
| Further technical details | | eCl@ss 8.1 | 27440205 |
| Characteristics according to EN 61984 | 50V 0.8kV 3 | ETIM 7.0 | EC000438 |
| Insulation resistance | ≥ 10 GΩ | Packaging Information | |
| Weight | 12,60 g | Packaging length | 350,00 mm |
| Operating temperature range (min, max) | -40 °C ... +125 °C | Packaging height | 105,00 mm |
| UL 94 flammability rating | V-0 | Packaging width | 145,00 mm |
| | | Packaging weight | 1,06 kg |
| | | Packaging volume | 5,33 dm ³ |
| | | Packaging description | Carton box |
| | | Packaging quantity | 60 Pcs |
| | | Packaging EAN code | 8015747221054 |
| | | Sub-packaging length | 35,00 mm |
| | | Sub-packaging height | 40,00 mm |
| | | Sub-packaging width | 155,00 mm |
| | | Sub-packaging weight | 0,09 kg |
| | | Sub-packaging volume | 0,22 dm ³ |
| | | Sub-packaging description | Carton tray |
| | | Sub-packaging quantity | 5 Pcs |
| | | Sub-packaging EAN barcode | 8015747095945 |


Part number

CX 02 BM




Catalogue drawings

CX 02 BM

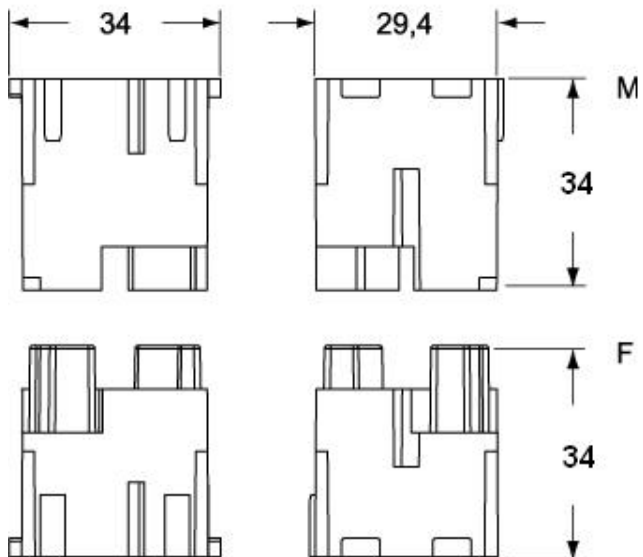

CX 02 BF

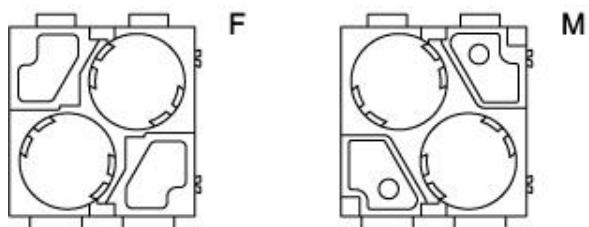

Notes

Standard modular inserts:

-in combination with standard contacts and standard frames (CX ... TF/TM); must be mounted either in traditional enclosures or in COB panel supports (both up to 500 matings).

Dimensions shown in mm are not binding and may be changed without notice.