


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

- NOTES:
1. SEE CURRENT CATALOG FOR ADDITIONAL P/N SUFFIXES TO INDICATE PACKAGE QUANTITY.
 2. ALL JACK 8 POSITION, 8 WIRE CONNECTOR MODULES ARE UNIVERSAL IN DESIGN, THEY WILL ACCEPT TWO, THREE, OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
 3. DIMENSIONS IN PARENTHESES ARE METRIC.
 4. MOUNTS TO COMMON NEMA 1-13/64" [30.5mm] DIAMETER ENCLOSURE OPENING.
 5. MOUNTS IN PANEL THICKNESS OF .035-.135" [.89-3.43MM]
 6. SEALS TO IP67.

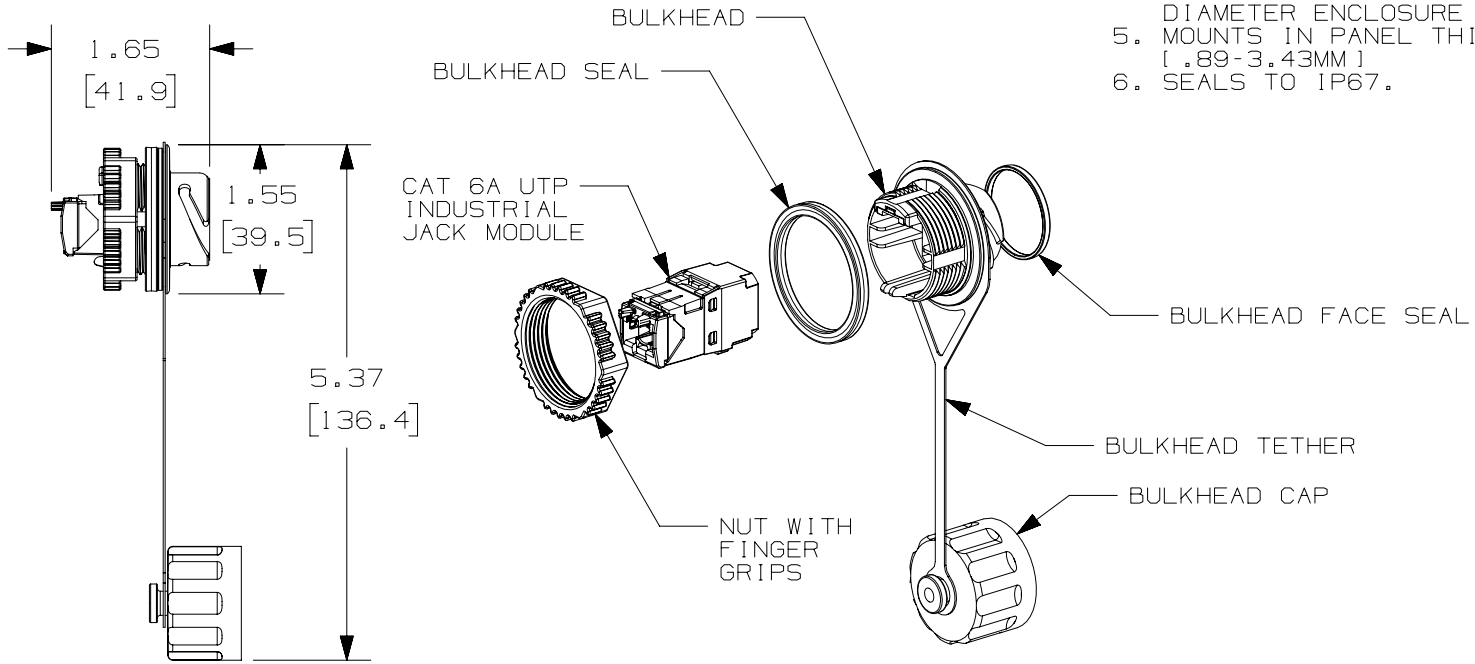

PART NUMBER		I AEBH6X	
TITLE			
INDUSTRIAL TX6A CONNECTOR UTP JACK MODULE WITH BULKHEAD			
CUSTOMER DRAWING			
ITEM REVISION NAME		M01245AY/00	
DATASET FILE NAME		M01245AY_DC91/00A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.X ±		.XXX ±	
.XX ±		ANGLES ±	
DRAWN BY		SCALE	
BJN		NONE	
DATE		SHT 1 OF 1	
5-17-16		A	
CHK		DRAWING NUMBER:	
JAV		01245-91	
THIRD ANGLE PROJECTION		SIZE	
REV		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	11-17-16	BJN	JAV	RDE	RELEASED TO PRODUCTION	01245-91

D10100DA/14