
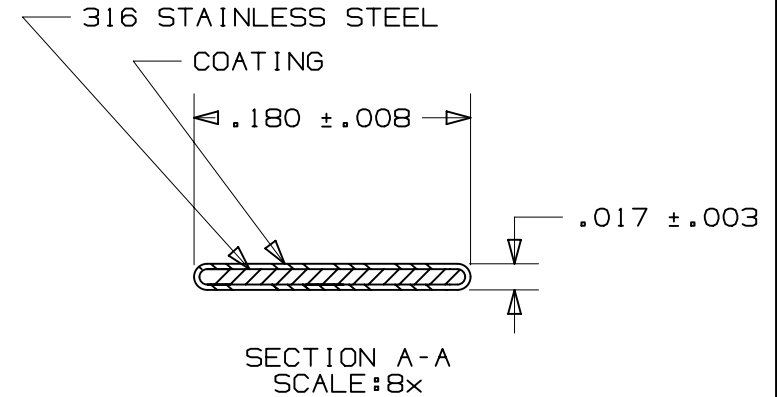
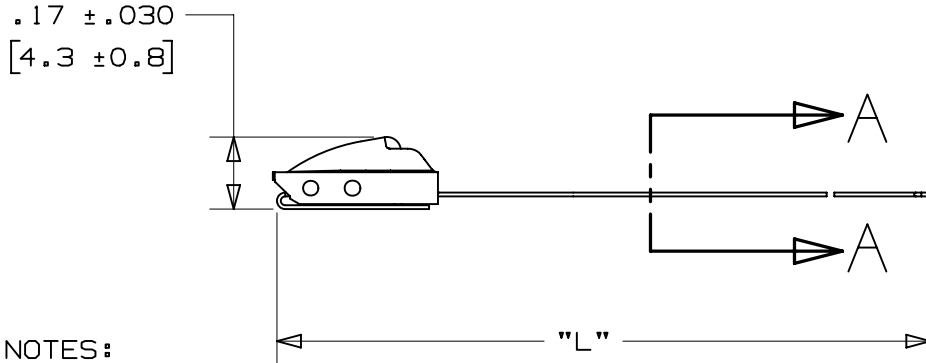


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

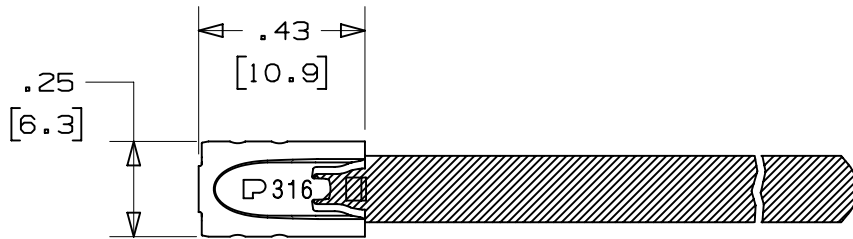

NOTES:

- 1.) APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, HTMT
- 2.) MINIMUM LOOP TENSILE STRENGTH - 100 LBS. (445 NEWTONS) WHEN TESTED ON A 1.5" MANDREL.
- 3.) BRACKETS [] DENOTES DIMENSION IN MILLIMETERS, AND ARE FOR REFERENCE ONLY
- 4.) TOLERANCES:
 - .XXX = ±.010 [.25]
 - .XX = ±.02 [.5]
 - .X = ±.03 [.8]
 - ANGLES = ±2°
- 5.) MATERIAL: 316 STAINLESS STEEL
- 6.) COATING - POLYESTER
COATING THICKNESS: .002 MIN./ .005 MAX. PER SIDE

PANDUIT PART NO.	MAX BUNDLE DIA.	PACKAGE QTY	LENGTH L ±.3 [7]
MLTFC1.5S-CP316	1.5" [38]	100	6.2" [157]
MLTFC2.5S-CP316	2.5" [64]	100	9.2" [234]
MLTFC3.4S-CP316	3.4" [86]	100	12.2" [310]
MLTFC5.4S-CP316	5.4" [137]	100	18.2" [462]

TITLE		METAL LOCKING TIE - COATED STANDARD SERIES	
CUSTOMER DRAWING		PANDUIT	
ITEM REVISION NAME	N41273BS/02		
DATASET FILE NAME	N41273BS/02	MATERIAL: 316 STAINLESS STEEL	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		DRAWING NUMBER: N41273BS_DC	
.x ± .1 [2.54] .xxx ± .005 [.127] .xx ± .01 [.25] ANGLES ± 5 °		THIRD ANGLE PROJECTION	
DRAWN BY	DATE	CHK	SCALE
JAMB	02.24.15	EJD	2:1
REV	DATE	BY	CHK
02	02.24.15	BDK	SKB
DESCRIPTION		APR	ECN
UPDATED TITLE BLOCK AND BORDER			N41273BS_DC
SHT 1 OF 1		A	

D10100DA/16