


Part number

# PHW 3263 SV



Mobile plug, PLUSO HEAVY DUTY series, 2 poles + PE, 6 h (blue), 32 A, 200 ÷ 250 V, straight

| Product description                           |   | Material properties          |   |
|---|---|------------------------------|---|
| <b>Product type</b>                           | Plug<br>Mobile  | <b>Colour</b>                | RAL 7012 grey, RAL 5015 blue  |
| <b>Series</b>                                 | PHW...SV, PLUSO HEAVY DUTY  | <b>RoHs conformity</b>       | Compliant with exemption<br>6(c): copper alloy containing up to 4% lead by weight |
| <b>N. of poles</b>                            | 2 poles +  | <b>China RoHs - EFUP</b>     | 50  |
| <b>Clock position</b>                         | 6   | <b>REACH SVHC substances</b> | Yes<br>Lead   |
| <b>Specification</b>                          | Straight  | <b>SCIP number</b>           | Ca7de37f-add8-4b77-9861-279c94903ade  |
| Technical data                                |   | Approvals / Standards        |   |
| <b>Current</b>                                | 32 A  | <b>Reference standard</b>    | EN 60309-1 and -2   |
| <b>Voltage</b>                                | 200 ÷ 250 V   | General ordering information |   |
| <b>IP degree of protection</b>                | IP66 / IP67   | <b>EAN13 code</b>            | 8015747083775   |
| Further technical details                     |   | Packaging Information        |   |
| <b>Weight</b>                                 | 244,00 g  | <b>Packaging length</b>      | 330,00 mm   |
| <b>Operating temperature range (min, max)</b> | -40°C ... +100°C  | <b>Packaging height</b>      | 175,00 mm   |
|   |   | <b>Packaging width</b>       | 295,00 mm   |
|   |   | <b>Packaging weight</b>      | 2,78 kg   |
|   |   | <b>Packaging volume</b>      | 17,04 dm <sup>3</sup>   |
|   |   | <b>Packaging description</b> | Carton box  |
|   |   | <b>Packaging quantity</b>    | 10 Pcs  |
|   |   | <b>Packaging EAN code</b>    | 8015747085397   |


Part number

# PHW 3263 SV



## Catalogue drawings

(16 / 32A) PHW ... SV

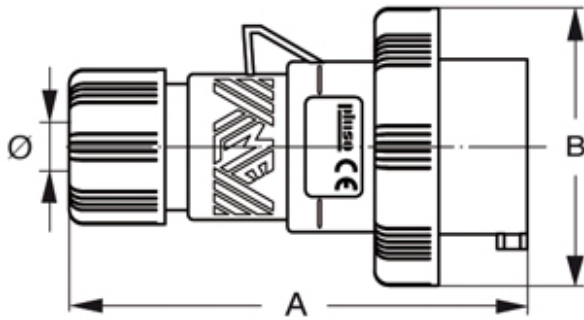

| PHW...SV        | A   | B   | ø min | ø max |
|-----------------|-----|-----|-------|-------|
| <b>16A</b> 2P+⊕ | 129 | 70  | 7     | 16    |
| 3P+⊕            | 129 | 77  | 7     | 16    |
| 3P+N+⊕          | 129 | 86  | 8     | 24    |
| <b>32A</b> 2P+⊕ | 150 | 92  | 8     | 24    |
| 3P+⊕            | 150 | 92  | 8     | 24    |
| 3P+N+⊕          | 150 | 100 | 8     | 24    |

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Temperature range: from -40 °C to +100 °C
- Compliant with EN 60309-1 and -2
- Enclosure, insert and locking ring in insulating, thermoplastic, self-extinguishing material
- PHW...SV types (IP66/IP67), entry with cable gland colour coded according to the operating voltage, RAL 9005 black enclosure, locking ring with gasket colour coded according to the operating voltage
- Terminals with retained screws
- Stainless steel insert fixing screws
- Nickel-plated contacts as standard