

Part number

# PB 16102 SV



Mobile plug, PLUSO series, 2 poles, 10 h  
(white), 16 A, 20 ÷ 50 V

Product description		Material properties	
<b>Product type</b>	Plug Mobile	<b>Colour</b>	RAL 7035 grey, RAL 9010 white
<b>Series</b>	PB...SV, PLUSO	<b>RoHs conformity</b>	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
<b>N. of poles</b>	2 poles	<b>China RoHs - EFUP</b>	50
<b>Clock position</b>	10	<b>REACH SVHC substances</b>	Yes Lead
Technical data		<b>SCIP number</b>	Ca7de37f-add8-4b77-9861-279c94903ade
<b>Current</b>	16 A	Approvals / Standards	
<b>Voltage</b>	20 - 50 V	<b>Reference standard</b>	EN 60309-1 and -2
<b>IP degree of protection</b>	IP44	General ordering information	
Further technical details		<b>EAN13 code</b>	8015747061247
<b>Weight</b>	106,00 g	Packaging Information	
<b>Operating temperature range (min, max)</b>	-25°C ... +40°C	<b>Packaging length</b>	220,00 mm
		<b>Packaging height</b>	130,00 mm
		<b>Packaging width</b>	240,00 mm
		<b>Sub-packaging weight</b>	1,06 kg
		<b>Sub-packaging description</b>	Carton box
		<b>Sub-packaging quantity</b>	10 Pcs
		<b>Sub-packaging EAN barcode</b>	8015747061254


Part number

# PB 16102 SV



Catalogue drawings

(16 / 32A) PB ... SV

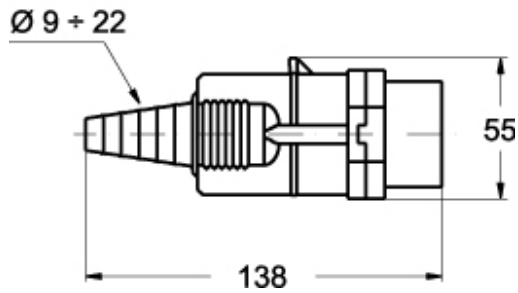

## Notes

Dimensions shown in mm are not binding and may be changed without notice.

- 
- Compliant with EN 60309-1 and -2
  - Enclosure and insert in insulating, thermoplastic and self-extinguishing material
  - RAL 7035 grey enclosure
  - Plug mouth colour coded according to the operating voltage and frequency
  - Wall-mounting types PB...SM, top entry with threaded grommet (replaceable with cable gland)
  - Coupler types PB...SV, cable anchoring collar incorporated in the collar, entry with grommet
  - Terminals with retained screws
  - Nickel-plated contacts on request
  - IP44 degree of protection (EN 60529)
-