

Keyword:
Extended Temperature Range

Type: SL-561

Performance Data Size $\frac{3}{8}$ AA
 (Typical values for batteries stored at 25°C for one year)


System	Li/SOCl ₂
Nominal voltage	3.6 V
Nominal capacity	1.0 Ah
Nominal current	1 mA
Max. continuous discharge current	10 mA
Anode surface area	9 cm ²
Lithium content	0.5 g
Weight	12 g
Volume	5.7 cm ³
Temperature range	-55...+130°C

WARNING:
 Fire, explosion, and severe burn hazard. Do not recharge, disassemble, heat above 150°C, incinerate, or expose contents to water.


UL recognition under file MH 12827

See also our website under Products/Safety



Typical Discharge Curves at +85°C

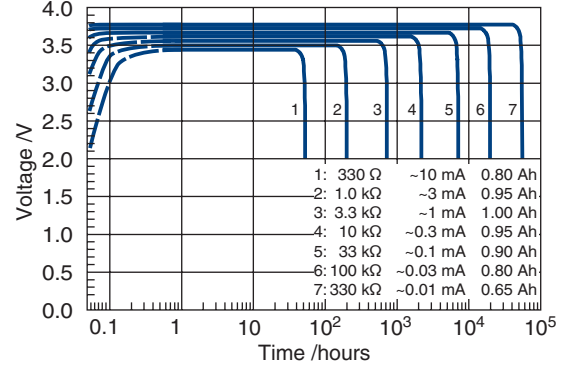

Available Capacity

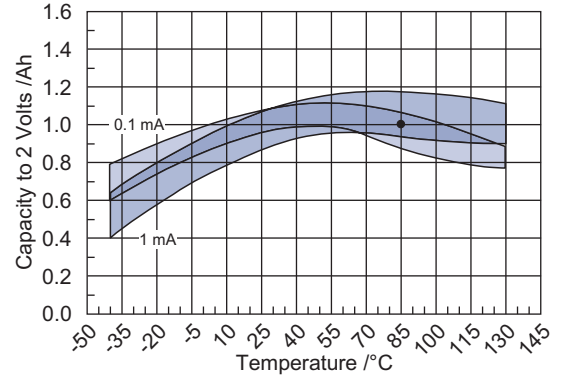

Operating Voltage

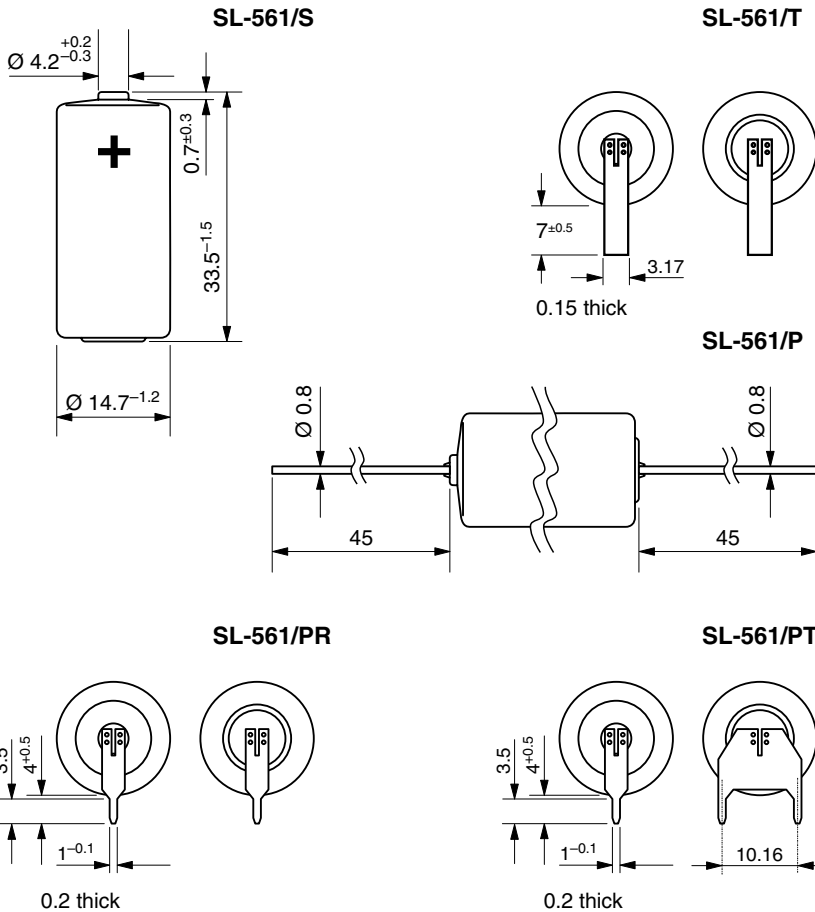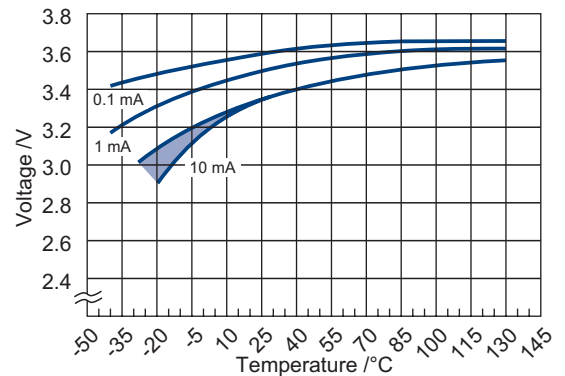

Available Terminations

SL-561/S	Standard
SL-561/T	Tags
SL-561/P	Pins
SL-561/PR	Pins Radial
SL-561/PT	Polarized Tags

Catalogue No.

11 1 05611 00
11 1 05612 00
11 1 05613 00
11 1 05616 00
11 1 05618 00

Any values given here are for information purposes only. They also depend on actual conditions of use and are not warranties of future performance. Subject to change.