




Enclosures with

| Product designation Product type designation | | cut-outs for Ø22mm units - with hole for 5 actuators LPZM |
|----------------------------------------------|---|-----------------------------------------------------------------------|
| General characteristics | | |
| Colour | | Grey |
| IEC degree of protection | | IP66 and IP67 |
| Mechanical features | | |
| Weight | g | 680 |
| UL technical data | | |
| UL degree of protection | | NEMA 4X |
| Ambient conditions | | |
| Temperature | | |
| Operating temperature | | |

| | min | °C | -25 | |
|---------------------|-----|----|-----|---|
| | max | °C | +70 | |
| Storage temperature | | | | |
| | min | °C | -40 | |
| | max | °C | +85 | |
| | | | | |
| 0 | | | | _ |

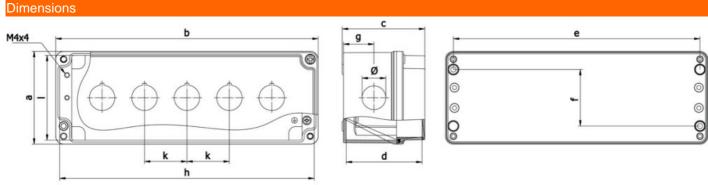

| | а | b | с | d | e | f | g | h | 1 | k | ø |
|------------------------------|----|-----|----|----|-----|----|----|-----|----|------|----|
| | 80 | 230 | 73 | 67 | 218 | 50 | 27 | 225 | 75 | 37.5 | 21 |
| ertifications and compliance | | | | | | | | | | | |

Compliance

| Compliance | |
|---------------------|------------------|
| | CSA C22.2 n° 14 |
| | IEC/EN 60947-1 |
| | IEC/EN 60947-5-1 |
| | UL508 |
| Certificates | |
| | cULus |
| | EAC |
| ETIM classification | |
| | |



LPZM5A8 CONTROL STATION, EMPTY WITH NO ACTUATORS, FOR 5 ACTUATORS. GREY COVER

ETIM 8.0

EC000200 -Enclosure for control circuit devices